NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.


2. P/N: W-200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

3. PERFORMANCE

MAXIMUM CURRENT: 2.5 AMPS

MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC HANDS FREE: 1000 W.V.D.C.

MAXIMUM TEMPERATURE: 176°F (80°C)

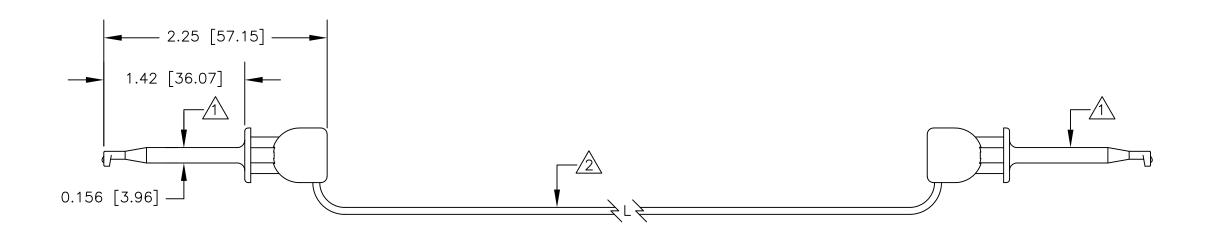

			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CONTRACT NO. APPROVALS	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			± .XX ± ± .XXX ±	DRAWN R.L.	5/13	DESCRIPTION	
			MATERIAL	APPROVED BY		MINI-HOOK (X100W)	
Ī			SEE NOTE.			JUMPER ´	
			FINISH			SIZE CODE IDENT NO. DRAWING NO.	
	NEXT ASSY	USED ON	-SEE NOTE.			B 08505 204W	
	APPI	ICATION	DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1	