

WARNING

THE FOLLOWING SERVICING INSTRUCTIONS ARE FOR USE BY QUALIFIED PERSONNEL ONLY. TO AVOID PERSONAL INJURY, DO NOT PERFORM ANY SERVICING OTHER THAN THAT CONTAINED IN OPERATING INSTRUCTIONS UNLESS YOU ARE QUALIFIED TO DO SO.


PLEASE CHECK FOR CHANGE INFORMATION AT THE REAR OF THIS MANUAL.

| | A Common March | And the second of the second | | ole act is |
|-------------------------|--|--|--|--------------|
| | | 8002A | 12700 | property and |
| Participant Participant | | SOR LAE | | |
| | 1, 8002 SI | | | |
| (For 8 | 002A SN I | 3032000 8 | ına up) | |
| | SER | VICE | | |
| | A CONTROL OF THE PROPERTY OF T | The state of the s | Part of the second state o | Section 1 |
| | | A Land Order of the control of the c | 10170 | |

INSTRUCTION MANUAL

Tektronix, Inc.
P.O. Box 500
Beaverton, Oregon 97077

Serial Number _____

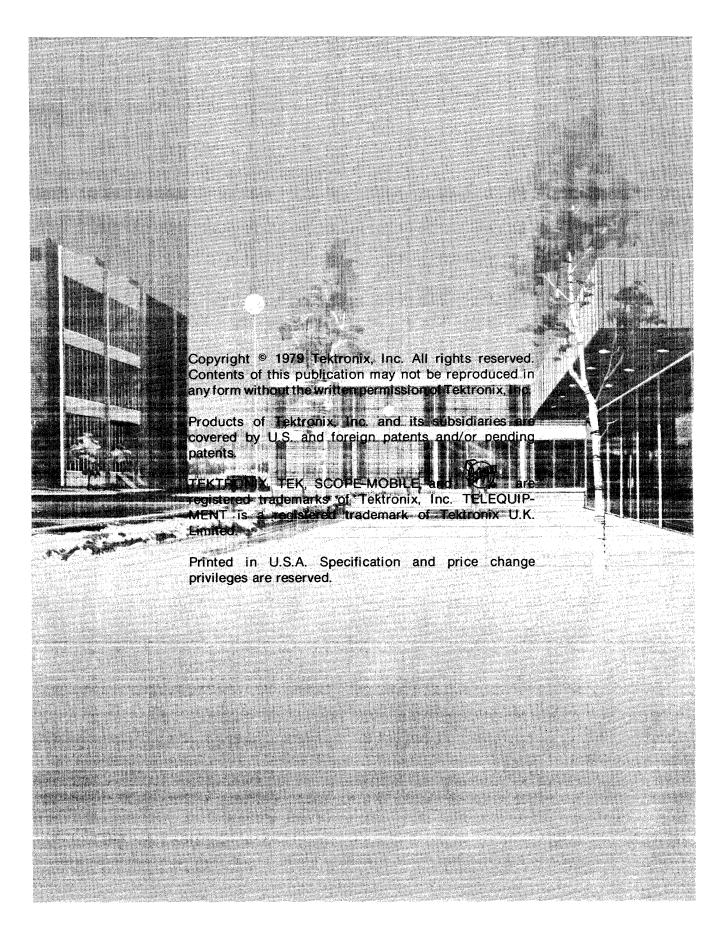

DOCUMENTATION OVERVIEW

The 8001/8002A μ Processor Lab support documentation consists of two groups of manuals: user's manuals and service manuals. User's manuals explain the procedures required to operate the 8001/8002A μ Processor Lab system and its peripheral devices. They are identified by their gray covers and are a standard part of the system package.

Service manuals provide the information necessary to perform system testing and repair. Service manuals are identified by their blue covers and may be purchased as optional accessories.

The following manuals contain service information for the 8001/8002A μ Processor Lab System:

8001/8002A μProcessor Lab Service Manual

8001/8002A μProcessor Lab Installation Guide

8002A µProcessor Lab Flexible Disc Unit Service Manual (optional)

118-0195-00 Flexible Disc Drive Service Manual (optional)

Service manuals for

8001/8002A μProcessor Lab Emulator Processors (optional)

Service manuals for

8001/8002A μProcessor Lab optional modules (optional)

Service manuals for

8001/8002A μ Processor Lab peripheral equipment (optional)

8001/8002/8002A NOMENCLATURE EXPLANATION

An 8001 consists of the following plug-in cards.

Base boards required in an 8001. Operating system is TEKOPS. TEKOPS is contained in 7 PROM's plugged into system memory board.

System processor

Debug

System communication

Program memory: 1 board (16K BYTES) standard, up to a total of 4 boards (64K BYTES) optional

System memory board, PROM's for each option plug into this board. The PROM's are sold as a part of the option.

Options available to 8001:

Option PROM's are sold with each emulator option. These PROM's are plugged into the 8001 system memory board along with TEKOPS to form the complete operating system.

6800 Emulator and probes

8080 Emulator and probe

8085 Emulator and probe
Z80 Emulator and probe
9900 Emulator and probe
3870/3872 Emulator and probe
F8 probe connects to 3870 emulator
1802 Emulator and probe
6802 probe connects to 6800 emulator
Real time prototype analyzer (RTPA)
1702 PROM programmer
2704/2708 PROM progammer
new option available in the future

An 8002 consists of the following plug-in cards, or assemblies:

Base boards/assemblies required in an 8002. The operating system is TEKDOS. It is provided on a flexible disk.

System processor

System memory

Assembler processor

Program memory: 1 board (16K BYTES) standard, up to a total of 4 boards (64K BYTES)

optional

Debug

System communication

Flexible disk unit

Options available to the 8002:

The operating system is TEKDOS. It is provided on a flexible disk.

6800 Emulator and probe

8080 Emulator and probe

8085 Emulator and probe

Z80 Emulator and probe

9900 Emulator and probe

3870/3872 Emulator and probe

F8 Probe connects to 3870 emulator

1802 Emulator and probe

6802 Probe connects to 6800 emulator

Real time prototype analyzer (RTPA)

1702 PROM programmer

2704/2708 PROM programmer

New option available in the future

An 8002A consists of the same boards as an 8002. The only addition is that 2 program memory boards are standard (32K BYTES). Up to 4 memory boards (64K BYTES total) are optional.

Options available to the 8002A:

All options are the same.

PREFACE

ABOUT THIS MANUAL

This manual is organized into 12 text sections and a schematic diagram section.


Text sections 1 and 2 provide a general overview of the 8001 and 8002A μ Processor Labs. Section 1 also contains a brief synopsis of each standard module's operation within a μ Processor Lab. The end of Section 1 contains an example of module interaction during a software TRACE operation.

Sections 3 through 10 describe each module's theory of operation down to the logical block level. Each section is keyed to schematics located at the rear of this manual.

Some system troubleshooting information is included in Section 11; however, this manual is not presented as a comprehensive troubleshooting guide.

MANUAL CONVENTIONS TEXT AND SCHEMATICS

We have provided guideposts to help you find the schematic diagrams relating text in this manual. Headings in the text tell you on which schematic the circuitry under discussion can be found. The following example shows a text heading.

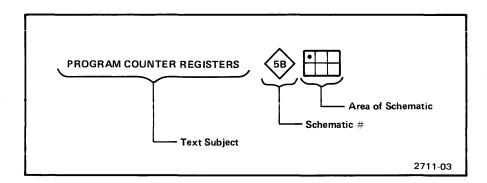

The example tells you three things:

- The text will discuss program counter registers.
- The program counter registers can be found on schematic 5B.
- The grid shows the general area of schematic 5B that contains the program counter registers.

Using the example, you can tell that the program counter registers are located on the upper left corner of schematic 5B.

SLASHED ZEROS (Ø)

Throughout this manual, zeros are slashed (Ø) only where needed for clarity.

HEXADECIMAL NOTATION

All addresses are represented in this manual by hexadecimal numbers (i.e., 40AC). Subscripts denoting base sixteen are not used.

UNITS COVERED IN THIS MANUAL

This manual presents service information on the mainframe and standard system modules of the 8001 and 8002A μ Processor Lab systems. The standard modules are:

- -System Processor module
- —System and Program Memory modules
- -System Communications module
- -Assembler Processor module
- —Debug and Front Panel I/O module

Optional system modules and peripherals have separate service manuals.

CHANGE INFORMATION

Change information is located in the back of this manual in the CHANGE section. Change information should be entered into the body of the manual when the manual is received.

REVISION HISTORY

Revision history information is included in the text and diagrams as they are revised and reprinted. Original manual pages have an "@" symbol at the bottom of the page. Existing pages of a manual when revised, have a revision code and date in place of the "@" symbol. New pages added to a section, whether they contain old, new, or revised information, will have the "@" symbol.

INSTALLATION INFORMATION

A minimum of installation material is given in this manual. Refer to the $8001/8002A\mu$ Processor Lab Installation Guide for information regarding the installation of $8001/8002A\mu$ Processor Lab modules and options. Module configuration information is also given in the Installation Guide.

IV REV A OCT 1979

OPTIONS

Options for the $8001/8002A\mu$ Processor Lab system are documented by individual manuals. See the Tektronix Products catalog or contact your local Tektronix Field Office or representative for a list of options.

RELATED MATERIAL AND TEST EQUIPMENT

To make the most effective use of material in this manual, the service facility should have access to the following documents and equipment:

- 1. Service manuals and user's manuals for all options and peripherals installed in the system.
- 2. A Signetics 2650/2650A technical manual, for interpreting System Processor machine code.
- 3. An 8001/8002A Maintenance Front Panel.
- 4. Logic analyzer—TEKTRONIX 7000 series mainframe with a 7D01F plug-in.
- 5. Technical data sheets for devices used in this instrument. These data sheets are best obtained from the local distributor or direct from the device manufacturer. The Replaceable Electrical Parts list in this manual provides a reference to the manufacturer, and the manufacturer's part number for each device used in this instrument.

| | | • | |
|--|--|---|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

TABLE OF CONTENTS

| | | Page |
|-------------|--|------|
| DOCUMENTA | TION OVERVIEW | i |
| 8001/8002/8 | BOO2A NOMENCLATURE EXPLANATION | i |
| PREFACE | | iii |
| OPERATOR'S | SAFETYSUMMARY | xvii |
| SERVICE SAF | ETY SUMMARY | xix |
| | | |
| SECTION 1 | SYSTEM OVERVIEW | |
| | 8002A μPROCESSOR LAB SYSTEM | 1-1 |
| | 8002A μProcessor Lab System Hardware | 1-1 |
| | 8002A μProcessor Lab System Software | 1-2 |
| | 8001 μPROCESSOR LAB SYSTEM | 1-2 |
| | 8001 μProcessor Lab System Hardware | 1-2 |
| | 8001 μProcessor Lab Operating System | 1-2 |
| | MODULE OVERVIEW | 1-4 |
| | System Bus | 1-4 |
| | System Processor Module | 1-4 |
| | Software Functions | 1-4 |
| | CONTROL BYTES | |
| | Emulator Processor Module | 1-7 |
| | Emulation Modes | 1-10 |
| | Debug and Front Panel I/O Module | 1-12 |
| | System and Program Memory Modules | |
| | Assembler Processor | |
| | System Communications Module | |
| | SOFTWARE | |
| | Overlay Area | 1-19 |
| | What Happens When You Enter TRACE ALL? | 1-20 |
| | | |
| SECTION 2 | SPECIFICATIONS | |
| | INTRODUCTION | |
| | μ PROCESSOR LAB CHARACTERISTICS | 2-1 |
| | 1. Electrical Characteristics | 2-1 |
| | 2. Environmental Characteristics | 2-2 |
| | 3. Physical Characteristics | 2-3 |
| | μ Processor Lab Power Supplies | 2-3 |
| | 1. Electrical Characteristics | 2-3 |
| | μ Processor Lab Standard Module Power Requirements | 2-3 |
| | ACCESSORIES | 2-4 |
| | 8001 μProcessor Lab Standard Accessories | 2-4 |
| | 8002A μProcessor Lab Standard Accessories | 2-4 |

| SECTION 2 | SPECIFICATIONS (cont) | Page |
|-----------|---|------|
| | Optional Accessories | _ |
| | PERIPHERAL EQUIPMENT | |
| | Standard Peripheral Equipment | |
| | Optional Peripheral Equipment | |
| | epitotia i ampitota Equipmont i i i i i i i i i i i i i i i i i i i | ∠-4 |
| SECTION 3 | SYSTEM PROCESSOR MODULE | |
| | INTRODUCTION | 3-1 |
| | CIRCUIT DESCRIPTION | 3-1 |
| | General | 3-1 |
| | 2650 Microprocessor and Supporting Logic | 3-1 |
| | 2650 Clock Logic | 3-2 |
| | BIDIRECTIONAL DATA BUS BUFFERS | 3-2 |
| | ADDRESS BUS BUFFERS | 3-2 |
| | SYSTEM BUS CONTROL LOGIC AND BUFFERS | 3-2 |
| | SYSTEM PROCESSOR PAUSE LOGIC | 3-3 |
| | SYSTEM PROCESSOR READ AND WRITE TIMING | 3-3 |
| | POWER-ON RESET | 3-4 |
| | Interrupt Logic | 3-4 |
| | GENERAL | 3-4 |
| | INTERRUPT INPUT LOGIC | 3-5 |
| | INTERRUPT SAMPLE AND HOLD LOGIC | 3-6 |
| | PRIORITY ENCODER AND VECTOR GENERATOR LOGIC: | 3-7 |
| | INTERRUPT VECTOR ADDRESS BUFFER | 3-7 |
| | INTERRUPT VECTOR DECODER | 3-7 |
| | SYSTEM PROCESSOR INTERRUPT CONTROL LOGIC | 3-7 |
| | I/O Logic | 3-8 |
| | GENERAL | 3-8 |
| | I/O DECODER LOGIC | 3-8 |
| | READ DECODER | 3-10 |
| | WRITE DECODER | 3-10 |
| | DATA BUS BUFFERS | 3-10 |
| | SYSTEM TERMINAL INTERFACE | 3-10 |
| | SERIAL CONTROL REGISTER | |
| | SERIAL INTERFACE INPUT LOGIC | 3-12 |
| | SERIAL INTERFACE OUTPUT LOGIC | 3-12 |
| | Flexible Disc Unit Interface | 3-13 |
| | PARALLEL CONTROL REGISTER | 3-13 |
| | PARALLEL INPUT/OUTPUT DATA | 3-14 |
| | PARALLEL OUTPUT LATCH | 3-14 |
| | FLEXIBLE DISC STATUS BUFFER | 3-14 |

VIII REV A OCT 1979

| SECTION 3 | SYSTEM PROCESSOR MODULE (cont) | Page |
|-----------|--|--------|
| | Baud Rate and Timer Logic | 3-14 |
| | 10 MHz OSCILLATOR | 3-14 |
| | DIVIDER NETWORK | 3-15 |
| | UART CLOCK AND NUMBER OF STOP BITS | 3-16 |
| | INTERRUPT TIMER LOGIC | 3-17 |
| | Program Memory Bank Select Logic | 3-17 |
| SECTION 4 | 16K DYNAMIC RAM MODULE | |
| | INTRODUCTION | . 4-1 |
| | CIRCUIT DESCRIPTION | . 4-1 |
| | 16K RAM Configuration | . 4-1 |
| | RAM Memory | |
| | Bootstrap PROM | . 4-3 |
| | Data and Parity Control | . 4-3 |
| | DATA WRITE | . 4-4 |
| | DATA READ | . 4-4 |
| | Address Control | |
| | 8-BIT OPERATION | |
| | 16-BIT OPERATION | |
| | SIX-BIT REFRESH ADDRESS MULTIPLEXER | |
| | Refresh Request Logic | |
| | SYSTEM MODE REFRESH REQUEST | |
| | PROGRAM MODE REFRESH REQUEST | |
| | Operation Control and Timing Generator | |
| | READ | |
| | WRITE | |
| | REFRESH OPERATION | |
| | Configuration Logic | |
| | Byte/Word Control | |
| | 9900 WORD MODE HARDWARE MODIFICATION | |
| | Modification Procedure | . 4-12 |
| SECTION 5 | SYSTEM COMMUNICATIONS | |
| | INTRODUCTION | |
| | SYSTEM I/O FUNCTIONS | . 5-1 |
| | I/O Decoder Logic | . 5-2 |
| | Address Bus Buffers | . 5-3 |
| | Control Bus Buffers | . 5-3 |

| SECTION 5 | SYSTEM COMMUNICATIONS (cont) Pag EXTERNAL I/O FUNCTIONS 5-4 I/O Port Decoder 5-4 Bidirectional Bus Control Logic 5-4 Bidirectional Bus Drivers 5-5 Baud Rate Logic 5-5 Baud Select Logic 5-6 ACIAs 5-6 ACIA Read/Write Clock 5-8 ACIA WRITE 5-9 ACIA READ 5-9 MEMORY MAPPING FUNCTIONS 5-9 Memory Map 5-1 Memory Map Control Logic 5-1 Memory Map Address Logic 5-1 |
|-----------|---|
| SECTION 6 | DEBUG AND FRONT PANEL I/O MODULE |
| | INTRODUCTION |

X REV A OCT 1979

| SECTION 6 | Address Trace and Compare Logic | 1 1 2 2 2 6 6 7 7 7 8 9 9 9 0 0 |
|-----------|---|---------------------------------|
| | SINGLE STEP ENABLE LOGIC | |
| | CIRCUIT DESCRIPTION | |
| | Maintenance Front Panel and Breakpoint Forced Jump Logic 6-21 | |
| | Debug Module Control | 1 |
| SECTION 7 | 8001 SYSTEM MEMORY MODULE | |
| | INTRODUCTION | |
| | CIRCUIT DESCRIPTION | |
| | Select Logic | |
| | IO/System Memory Decoder | |
| | Address Decoder | |
| | Read/Write Control Logic | |
| | Bank Switch Logic | |
| | 2K RAM and Parity Control Logic | |
| | 2K RAM WRITE | |
| | 2K RAM READ | |
| | Patch PROM Logic | |
| | 6K ROM and Patch Address Logic | ŀ |
| | Patch Address Identifier7-4 | ļ |

xi

| SECTION 11 | MAINTENANCE AND TROUBLESHOOTING (cont) | Page |
|------------|--|----------------------------|
| | PREVENTIVE MAINTENANCE | |
| | Cleaning EXTERIOR | |
| | INTERIOR | |
| | VISUAL INSPECTION | |
| | TROUBLESHOOTING | |
| | General | |
| | Will Not Boot Up | |
| | Emulation Problems | |
| | PROM Programmer | |
| | Troubleshooting Aids | |
| | DIAGRAMS | |
| | CIRCUIT BOARD ILLUSTRATIONS | |
| | CAPACITOR MARKING | |
| | DIODE CODE | |
| | TRANSISTOR AND INTEGRATED CIRCUIT PIN | |
| | CONFIGURATION | 11-7 |
| | DIODE CHECKS | |
| | INTEGRATED CIRCUIT (IC) CHECKS | |
| | CORRECTIVE MAINTENANCE | |
| | Obtaining Replacement Parts | |
| | Parts Repair and Exchange Program | |
| | Soldering Technique | |
| | DISCRETE COMPONENT REPLACEMENT | |
| | INTEGRATED CIRCUIT REPLACEMENT | |
| | Disassembly and Replacement of 8001/8002 μProc | |
| | Lab Assemblies | |
| | 1. Removal of Power Supply Modules | 11-10 |
| | 2. Separating Power Supply Modules | 11-13 |
| | 3. Replacing Defective Plus and Minus 12 Vdc F | |
| | Supply | 11-13 |
| | 4. Replacing Defective +5.2 Vdc Power Supply | |
| | 5. Replacement of Power Supply Modules | 11-15 |
| APPENDIX A | BUS ASSIGNMENTS | |
| APPENDIX B | DECIMAL-HEXADECIMAL-BINARY EQUIVALENTS 0 | 0-255 ₁₀ |
| APPENDIX C | INTERRUPT VECTORS | |
| APPENDIX D | MODULE TEST POINTS | |
| APPENDIX F | I/O DEVICE ADDRESS ASSIGNMENTS | |

SECTION 12 REPLACEABLE ELECTRICAL PARTS LIST

SECTION 13 DIAGRAMS

SECTION 14 REPLACEABLE MECHANICAL PARTS LIST

CHANGE INFORMATION

xiv

LIST OF ILLUSTRATIONS

| Fig. | | Page |
|------------|---|--------|
| 1-1 | The 8002A μ Processor Lab with Optional CT8100 CRT Terminal and Prototype Control Probe | |
| 1-2 | Functional Block Diagram of the 8001/8002A μ Processor Lab System | . 1-3 |
| 1-3 | 8001/8002A μProcessor Lab System Processor Block Diagram | . 1-5 |
| 1-4 | 8001/8002A μProcessor Lab Emulator Processor Block Diagram | . 1-9 |
| 1-5 | 8001/8002A μProcessor Lab Debug and Front Panel I/O Module Block | |
| | Diagram | . 1-13 |
| 1-6 | 8001/8002A µProcessor Lab System Communications Module Block | |
| | Diagram | |
| 1-7 | TEKDOS As it Appears In 8002A System Memory | |
| 1-8 | System Memory Overlay Area | . 1-19 |
| | | |
| 3-1 | System Processor M/10 Read and Write Timing Diagram | |
| 3-2 | Baud Rate Clock Divider | . 3-15 |
| A 1 | 16K Durania BAM Bafasah Oranatian | 4 7 |
| 4-1 | 16K Dynamic RAM Refresh Operation. | |
| 4-2 | 16K Dynamic RAM Memory Read Operation | |
| 4-3 4-4 | 16K Dynamic RAM Memory Write Operation | |
| 4-4 | Program Memory—9900 Word Mode Modification | . 4-13 |
| 5-1 | Baud Rate Logic | . 5-5 |
| 5-2 | ACIA Block Diagram | |
| 5-3 | 8001/8002A μProcessor Lab RS-232-C I/O Ports | |
| 5-4 | Memory Map Functional Control | |
| 5-5 | Memory Map Address Logic Timing | |
| | | ٠.2 |
| 6-1 | Command Byte Format | . 6-5 |
| 6-2 | Debug Control Byte Format | . 6-6 |
| 6-3A | Sequencer State Timing Diagrams | . 6-14 |
| 6-3B | Sequencer State Timing Diagrams | . 6-15 |
| 0.4 | | |
| 8-1 | Refresh Timing for High-Speed Memory. | |
| 8-2 | Asynchronous Refresh Timing for High-Speed Memory | |
| 8-3 | High-Speed Memory Timing. | |
| 8-4 | High-Speed Memory Refresh Operation. | |
| 8-5 | High-Speed Memory Write Cycle | |
| 8-6 | High-Speed Memory Read Cycle | . 8-15 |

LIST OF ILLUSTRATIONS (cont)

| Fig. | | Page |
|------|--|------|
| 9-1 | Assembler Processor Operation Code Read Timing | 9-3 |
| 9-2 | Assembler Processor I/O Read Timing | 9-4 |
| 9-3 | Assembler Processor I/O Write | 8-5 |
| 9-4 | Assembler Processor Memory Read Timing | 9-6 |
| 9-5 | Assembler Processor Memory Write Timing | 9-7 |
| 11-1 | Tantalum Capacitor Color Code | 11-5 |
| 11-2 | Diode Polarity Marking | 11-6 |
| 11-3 | Pin Configuration for Semiconductor Components | 11-7 |

xvi

LIST OF TABLES

| Table | | Page |
|-------|--|--------|
| 3-1 | Interrupt Vectors | . 3-5 |
| 3-2A | Interrupt Flip-Flops on the System Processor Module | . 3-6 |
| 3-2B | Interrupt Flip-Flops Throughout the 8001/8002A μ Processor Lab | . 3-6 |
| 3-3 | I/O Decoder Logic Enable Chart | . 3-9 |
| 3-4 | I/O Port Address Values | . 3-9 |
| 3-5 | Serial Interface I/O Logic Ports | . 3-11 |
| 3-6 | Parallel Interface I/O Logic Ports | . 3-13 |
| 3-7 | Baud Rate Thumbwheel Switch Selection and Format | . 3-16 |
| 3-8 | Timer Interrupt and Program Memory Bank Switch I/O Ports | . 3-17 |
| 4-1 | Switch and Jumper Positions and Functions | . 4-2 |
| 4-2 | Module Address Switches | . 4-2 |
| 4-3 | Module Addressing in Word Mode | . 4-6 |
| 5-1 | Jack and Device Assignments | . 5-1 |
| 5-2 | I/O Decoder Enable Chart | . 5-2 |
| 5-3 | I/O Decoder Logic | . 5-3 |
| 5-4 | ACIA Register Addressing | . 5-8 |
| 6-1A | Debug Module Output Ports and Functions | . 6-5 |
| 6-1B | Debug Module Input Ports and Functions | . 6-5 |
| 6-2 | I/O Decoder Logic | . 6-7 |
| 6-3 | SVC Format and Priorities | . 6-10 |
| 7-1 | 8001 System Memory Address Selection | . 7-2 |
| 7-2 | Bank Selection | . 7-3 |
| 8-1 | Switch Functions for Module Configuration | . 8-2 |
| 8-2 | Module Address Switches | . 8-3 |
| 8-3 | System/Program Memory Configuration | . 8-3 |
| 8-4 | Module Addressing in Word Mode | . 8-8 |
| 9-1 | Control Signal Conversion | . 9-8 |

REV A OCT 1979 XVII

OPERATORS SAFETY SUMMARY

The general safety information in this part of the summary is for both operating and servicing personnel. Specific warnings and cautions will be found throughout the manual where they apply, but may not appear in this summary.

TERMS

In This Manual

CAUTION statements identify conditions or practices that could result in damage to the equipment or other property.

WARNING statements identify conditions or practices that could result in personal injury or loss of life.

As Marked on Equipment

CAUTION indicates a personal injury hazard not immediately accessible as one reads the marking, or a hazard to property including the equipment itself.

DANGER indicates a personal injury hazard immediately accessible as one reads the marking.

SYMBOLS

In This Manual



This symbol indicates where applicable cautionary or other information is to be found.

As Marked on Equipment



DANGER — High voltage.



Protective ground (earth) terminal.



ATTENTION — refer to manual.

Grounding the Product

This product is grounded through the grounding conductor of the power cord. To avoid electrical shock, plug the power cord into a properly wired receptacle before connecting to the power input or output terminals. A protective ground connection by way of the grounding conductor in the power cord is essential for safe operation.

xviii

Use the Proper Power Cord

Use only the power cord and connector specified for your product. Use only a power cord that is in good condition.

Refer cord and connector changes to qualified service personnel.

Use the Proper Fuse

To avoid fire hazard, use only the fuse specified in the parts list for your product, and which is identical in type, voltage rating, and current rating.

Refer fuse replacement to qualified service personnel.

Do Not Operate in Explosive Atmospheres

To avoid explosion, do not operate this product in an atmosphere of explosive gases unless it has been specifically certified for such operation.

Do Not Remove Covers or Panels

To avoid personal injury, do not remove the product covers or panels. Do not operate the product without the covers and panels properly installed.

SERVICING SAFETY SUMMARY

FOR QUALIFIED SERVICE PERSONNEL ONLY

Refer also to the preceding Operators Safety Summary.

Do Not Service Alone

Do not perform internal service or adjustment of this product unless another person capable of rendering first aid and resuscitation is present.

Use Care When Servicing With Power On

Dangerous voltages exist at several points in this product. To avoid personal injury, do not touch exposed connections and components while power is on.

Disconnect power before removing protective panels, soldering, or replacing components.

Power Source

This product is intended to operate from a power source that will not apply more than 250 volts rms between the supply conductors or between either supply conductor and ground. A protective ground connection by way of the grounding conductor in the power cord is essential for safe operation.

 $\mathbf{X}\mathbf{X}$

| SECTION 1 |
|-----------------|
| SYSTEM OVERVIEW |

SECTION 2 **SPECIFICATIONS**

SECTION 3 SYSTEM PROCESSOR

SECTION 4 16K DYNAMIC RAM

SECTION 5 SYSTEM COMMUNICATIONS

SECTION 6 DEBUG AND FRONT PANEL I/O

8001/8002A **SERVICE MANUAL SECTION INDEX**

SECTION 7

SECTION 8

SECTION 9 ASSEMBLER PROCESSOR

SECTION 10 POWER SUPPLY

SECTION 11 MAINTENANCE AND **TROUBLESHOOTING**

APPENDICES

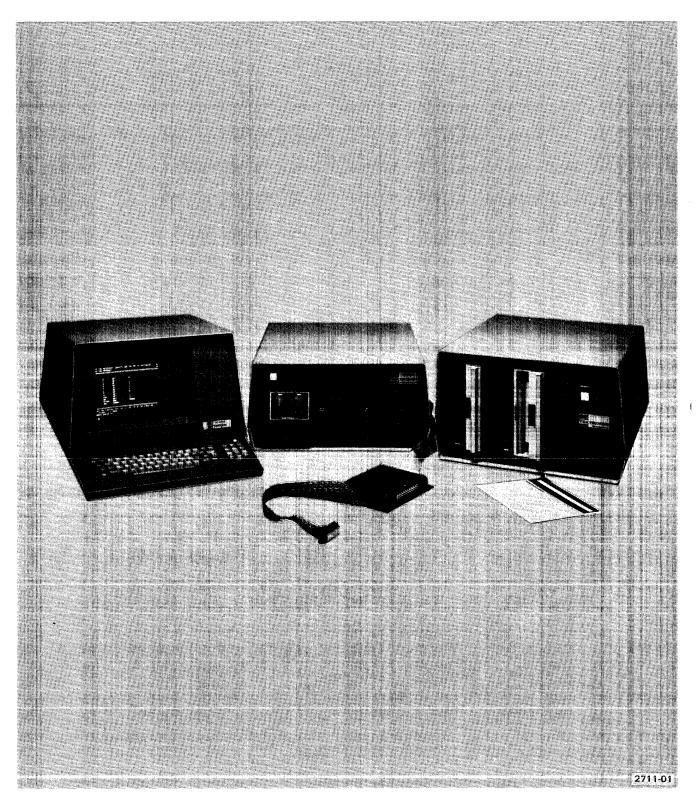


Fig. 1-1. The 8002A μProcessor Lab with Optional CT8100 CRT Terminal and Prototype Control Probe.

Section 1

SYSTEM OVERVIEW

This section gives a brief introduction to the 8001 and 8002A μ Processor Lab systems.

The 8002A μ Processor Lab system is a complete, stand-alone, hardware and software development system for microprocessor-based design projects.

The 8001 μ Processor Lab system is intended primarily for software testing, hardware development, and integration of both software and hardware. Software to be tested on the 8001 μ Processor Lab is usually developed on a host computer.

Both the 8001 and 8002A μ Processor labs use a common mainframe. However, the 8002A μ Processor Lab also includes a Flexible Disc Unit for mass storage. A typical 8002A μ Processor Lab system is shown in Fig. 1-1.

In this section, the 8002A μ Processor Lab is discussed first, followed by the 8001 μ Processor Lab. The functions and operations of each module in the two systems are discussed in the last portion of this section.

8002A μ PROCESSOR LAB SYSTEM

The 8002A μ Processor Lab system provides tools to edit, assemble, and link together software programs for a wide variety of microprocessor and microcomputer devices. Additionally, through the use of selected emulator processor modules, the 8002A μ Processor Lab system can execute the developed software.

With an optional prototype control probe added, the software routine may be run on a prototype system developed by the user.

8002A μProcessor Lab System Hardware

A complete $8002A \mu Processor$ Lab system consists of an $8002A \mu Processor$ Lab mainframe with its standard complement of plug-in modules, a Flexible Disc Unit, and some form of operator console or a host computer.

The internal architecture of the 8002A µProcessor Lab centers around a system microprocessor. This System Processor uses other microprocessors to perform software and hardware support functions. The system contains 16K bytes of RAM system memory, and 32K bytes (expandable to 64K bytes) of RAM program memory. The system also supports two flexible disc drives, with approximately 315K bytes of storage on each disc.

@

A block diagram of a typical 8002A μ Processor Lab system is shown in Fig. 1-2. The system contains three microprocessors: the System Processor, the Assembler Processor, and the selected emulator processor. Each microprocessor resides on a separate plug-in module in the system mainframe. Other system modules are the System Communications module, the Debug and Front Panel I/O module, System and Program Memory modules, and the optional modules for the Real-Time Prototype Analyzer and PROM programmers. Modules are connected to each other through a common system bus. Figure 1-2 will be referred to as each individual module is discussed. The Flexible Disc Unit is housed in a separate cabinet. It communicates with other system components through the System Processor.

8002A μProcessor Lab System Software

The operating system for the 8002A μ Processor Lab is the TEKTRONIX Disc Operating System (TEKDOS). TEKDOS resides in flexible disc storage. A ROM-based bootstrap routine loads the operating system into the 8002A μ Processor Lab System Memory immediately after power-on, or upon command from the front panel SYSTEM RESTART switch.

TEKDOS provides file management and utility programs for the 8002A μ Processor Lab. All the major software features—assemblers, linkers, text editors, etc.—operate under the supervision of TEKDOS. Refer to the 8002A μ Processor Lab System User's Manual for a complete discussion of TEKDOS software.

8001 μPROCESSOR LAB SYSTEM

8001 μProcessor Lab System Hardware

The 8001 μ Processor Lab system offers all the hardware development capabilities of the 8002A μ Processor Lab system, but not all the software features. The 8001 μ Processor Lab uses the same mainframe as the 8002A, and all the standard modules, with three exceptions. The 8001 μ Processor Lab contains only 16K bytes of Program memory rather than 32K as in the 8002A; the Assembler Processor module is not used, and System Memory is a ROM-based memory containing the TEKOPS operating system, rather than disc-based as in the 8002A. The 8001 μ Processor Lab does not use the Flexible Disc Unit.

8001 μProcessor Lab Operating System

The operating system for the 8001 μ Processor Lab is the TEKTRONIX Operating System (TEKOPS). TEKOPS resides in ROM on the 8001 μ Processor Lab System Memory module. For a discussion of TEKOPS software features, refer to the 8001 μ Processor Lab System User's Manual.

1-2

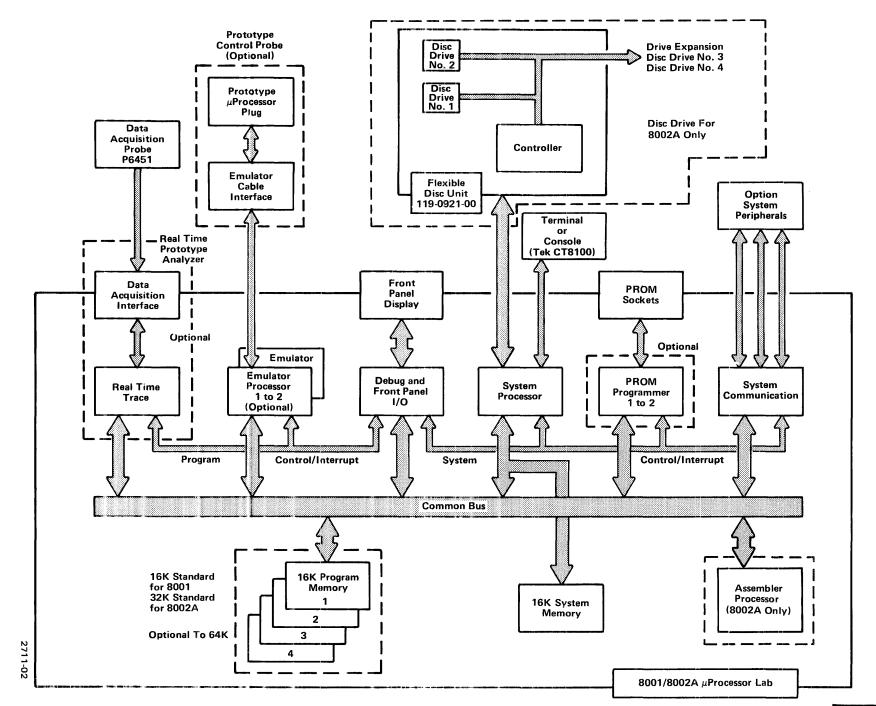


Fig. 1-2. Functional Block Diagram of the 8001/8002A μ Processor Lab System.

MODULE OVERVIEW

Complex systems like the 8001 and 8002A μ Processor Labs depend on communication between the various modules that make up the system. The following pages explain the interrelationships between the various modules within the μ Processor Lab systems. Each module is discussed first in terms of its functions, then in terms of its relationship with other modules. Refer to Fig. 1-2, the System Block Diagram, while reading this section.

In the following text, those functions or operations associated with the 8002A μ Processor Lab only are noted with an asterisk (*).

System Bus

As can be seen in Fig. 1-2, the μ Processor Lab is a bus-oriented computer. All the modules within the mainframe communicate to one another via the system bus. The bus contains 16 data lines, 16 address lines, and two groups of control lines. Some of the control lines are dedicated to the System Processor side of the mainframe, others are dedicated to the emulator processor side, and certain control lines are common to both sides. A schematic of the μ Processor Lab bus is located at the rear of this manual. The schematic provides a clear view of this separation within the bus. Details of each bus line are given in Appendix A.

System Processor Module

The μ Processor Lab system may be viewed as two systems, one the master (or controller) and the other the slave. In this arrangement, the System Processor serves as the master. The System Processor has overall control of the μ Processor Lab system. The System Processor provides supervisory functions in both hardware and software. Figure 1-2 shows the relationship of the System Processor to the rest of the μ Processor Lab. A simplified block diagram of the System Processor is shown in Fig. 1-3. The block diagram shows the major blocks of logic that will be discussed here.

Software Functions

Those software functions controlled by the System Processor include:

System Input/Output—directs all I/O activity for the system peripherals, such as the flexible disc, the console, and the line printer.

File Management*—organizes, stores, and retrieves user programs and system programs from the disc drives.

Text Editing*—executes the text editor program and maintains text files on the Flexible Disc Unit.

Debugging—executes the debug program and controls the emulator processor through separate debug hardware.

System Utilities—performs all system utility functions, such as processing messages between system peripheral devices.

PROM Programming—monitors and controls all PROM activity.

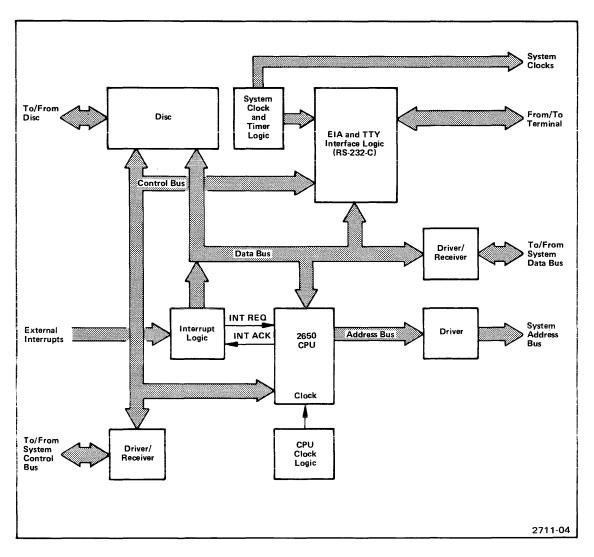


Fig. 1-3. 8001/8002A μ Processor Lab System Processor Block Diagram.

The System Processor provides overall control of the μ Processor Lab. This block diagram shows the 2650 microprocessor used in the System Processor module, and the other logic that controls the disc drive unit, RS-232-C interfaces, and the remainder of the μ Processor Lab.

CONTROL BYTES

HARDWARE FUNCTIONS

In order to perform its software functions, the System Processor must be able to communicate with other modules and with peripheral equipment. The System Processor maintains control of the other modules in the system by issuing control or command bytes to each module, as required. (This is accomplished in part by the Driver/Receiver block (Fig. 1-3), which interfaces the System Processor internal control lines with the system control lines.) The control byte contains the information needed by a module to perform a required function. For example, during debugging routines, the System Processor sends a control byte to inform the Debug module that a debug operation is being performed. The command byte issued to the Debug module contains information such as the beginning and ending software trace addresses (which the Debug module will store in registers) and the breakpoint addresses.

RS-232-C I/O PORTS

The System Processor module also has two RS-232-C compatible I/O ports (refer to Fig. 1-3). These I/O ports are used in communicating with the system terminal and printer. Using the system terminal as an example, when the user entered a character on the terminal, the character is converted to the proper code by the terminal. The character is then sent to the System Processor by way of the I/O port, and is acted upon by the System Processor. If the System Processor is performing another task, it can be interrupted by the terminal (or by any other module in the system, for that matter), and the interrupt-requesting device will be serviced.

FLEXIBLE DISC INTERFACE

Another function of the System Processor is to control the operation of, and transfer information to and from the Flexible Disc Unit* (Disc Interface block, Fig. 1-3). When the system is first started, the System Processor goes to the address of the boot PROM and begins execution of the bootstrap routine. The routine forces the System Processor to load TEKDOS from the Disc Unit into the System Memory module. Once TEKDOS is loaded into memory, the System Processor then goes to TEKDOS and begins an initialization routine located there.

1-6

FILE MANAGEMENT

Along with controlling the Flexible Disc Unit, the System Processor must also be able to transfer data files from Program Memory onto disc. The user may have developed a program and stored it within Program Memory. The System Processor can access Program Memory, read the information stored there, and transfer it to disc storage.

INTERRUPT LOGIC

The System Processor module is an interrupt-driven processor. That is, for any other module or exteenal equipment to obtain the services of the System Processor, it must generate an interrupt request. The requests are received by the Interrupt Logic block shown in Fig. 1-3. The System Processor can handle 16 different requests. These include such interrupts as a printer requesting another line of data, or issuing data to a PROM Programmer module during its activities. When a device or module issues an interrupt request, the System Processor responds with an interrupt acknowledge. This acknowledge tells the requesting device that it has the System Processor's complete attention. The System Processor module then waits to perform whatever action is required of it.

These examples do not list all the functions of the System Processor module, but do indicate some of the responsibilities of the module.

Emulator Processor Module

The emulator processor is discussed here to show its relative importance in system operations. Recall that the System Processor module was described as the master processor in a multi-processor system. In such a system, the next most important processor is the emulator processor. Figure 1-4 shows a simple block diagram of an emulator processor. Figure 1-2 shows the relationship of the emulator processor to the rest of the system.

IMPORTANCE OF EMULATOR PROCESSOR

The emulator processor is one of the main reasons for using a μ Processor Lab in microprocessor-based development. The emulator processor is required to run software designed for a specific microprocessor or microcomputer device. Without an emulator processor, both software and hardware development would be impractical, if not impossible.

RESEMBLANCE TO SYSTEM PROCESSOR

The emulator processor bears a considerable resemblance to the System Processor module. Both are microprocessor-based. Both are connected to the motherboard bus of the μ Processor Lab. Both have dedicated memories. (The exception here is that the System Processor can access both System Memory and Program Memory, while the emulator processor can access only Program Memory.) The emulator processor can (in a limited fashion) access prototype circuits with the use of its prototype control probe. Figure 1-4 illustrates the use of the prototype control probe in transferring information to a prototype instrument.

FUNCTIONS OF EMULATOR PROCESSOR

The emulator processor serves two purposes in the μ Processor Lab. First, it has the ability to run a program written for a specific microprocessor or microcomputer. With the help of the Debug and Front Panel I/O module and the System Processor module, such a program can be checked for run-time errors and program logic errors. Second, by adding a prototype control probe to the emulator processor, a prototype circuit under development can be debugged and stepped through the final design stages to completion.

EMULATION FUNCTION

The emulator processor emulates the operation of a target microprocessor. The target microprocessor is the device that will be used in the final version of a prototype microprocessor-based system. The emulator processor module reacts to software in the same way as the target microprocessor, but at the same time allows software debugging.

PROTOTYPE CONTROL PROBE

The prototype control probe carries this debugging ability one step further. The prototype control probe allows the emulator processor to be connected directly to the socket in the prototype system where the target microprocessor or microcomputer would normally be. Figure 1-4 shows this connection. In this way the user can exercise the prototype I/O, clock, and memory, and still maintain control of all operations within the 8001 or 8002A μ Processor Lab.

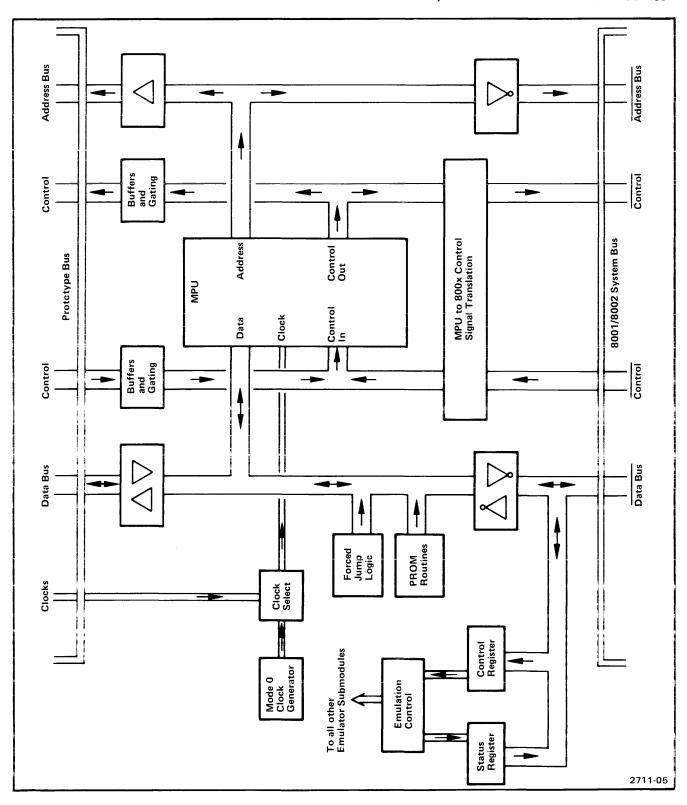


Fig. 1-4. 8001/8002A μ Processor Lab Emulator Processor Block Diagram.

The emulator processor is a tool used to develop both hardware and software. This block diagram illustrates the general blocks of logic used in most emulator processors. The emulating microprocessor is usually a refined version of the target microprocessor to be used in a prototype system. The emulator processor uses a PROM to hold a dump and restore routine. This PROM, used in conjunction with the forced jump logic, allows the Debug and Front Panel I/O module to direct the emulator processor during debugging operations.

Emulation Modes

EMULATION MODE 0

The emulator processor may operate in one of three modes. In emulation mode 0, all activity takes place within the μ Processor Lab. Mode 0 allows the emulator processor to execute a program stored in Program Memory. All software debugging features are available in this mode.

EMULATION MODE 1

In emulation mode 1, the emulator processor is used in conjunction with the optional prototype control probe. The prototype control probe is connected to a prototype system. In this mode the program is still executed from Program Memory; however, the I/O and clock functions are furnished by the prototype system. Another capability of emulation mode 1 is that memory locations can be "mapped" between the Program Memory module or the prototype memory. Memory mapping allows different parts of a program to be stored in either Program Memory or in the prototype's memory, and executed as though the program resided in a single memory.

MODE 1 EXAMPLE

For example, suppose that a program has been developed and stored in PROM devices on the prototype system. After a trial run through the program, the user discovers that an error exists in a subroutine. That subroutine can then be written from the prototype system into Program Memory. By placing the subroutine into Program Memory, the user can alter the routine or set breakpoints; any of the debugging capabilities of the μ Processor Lab may be used on the subroutine.

The beginning and ending addresses of the subroutine are placed into a memory mapping RAM located on the System Communications module. Then, when the user begins program execution out of prototype memory, execution will proceed until the beginning address of the mapped subroutine is reached. At that time, execution switches to the debugged subroutine in Program Memory. At the end of the subroutine, execution switches back to prototype memory.

EMULATION MODE 2

The third emulation mode is mode 2. Emulation mode 2 allows all operations to be run by the prototype system, while allowing the user to monitor and debug those operations with the μ Processor Lab. The program is executed entirely out of prototype memory. Prototype I/O and clock are also exercised.

CONTROL BY SYSTEM PROCESSOR

During all the operations of the emulator processor (only a few of which are listed here), control is maintained by the System Processor module. Recall that the System Processor module issues command or control bytes to all other modules in the μ Processor Lab. The emulator processor receives a control byte each time it is reset or the emulation mode is changed. The control byte contains the emulation mode in binary form, as specified by the System Processor. The control byte from the System Processor also contains other information necessary to the operation of the emulator processor. The Control Byte register is shown in Fig. 1-4.

TRACE OPERATION

During some debugging operations (like a TRACE operation) the emulator processor is required to single-step through the software program. The TRACE operation works (in general terms) in the following manner:

The system user enters a command that instructs the System Processor to initiate a TRACE operation. TRACE allows certain information to be stored or displayed during each step of a routine. The System Processor issues a new control byte to inform the emulator processor that a debugging routine is to begin. One bit of the control byte is set to indicate a debugging operation. The System Processor loads the starting and stopping addresses of the TRACE operation into registers on the Debug and Front Panel I/O module (discussed later in this section). The emulator processor then begins execution.

DUMP EMULATOR REGISTERS

The emulator processor fetches the first instruction from Program Memory. When execution of that instruction is complete, the emulator processor is halted by the Debug module. The Debug module then forces the emulator processor to execute a forced jump to a register dump routine. This routine, located in PROM on the emulator processor, causes the emulator processor to dump its register contents to a location in Program Memory.

STORE INFORMATION

After the emulator processor dumps its register contents into Program Memory it is paused again. At that time, the Debug module activates the System Processor module. The System Processor module obtains the emulator register values from Program Memory and transfers them to System Memory. The System Processor then outputs the information to the device requested, either to disc storage, a line printer, or a terminal. The System Processor replaces the register information in Program Memory. The Debug module then pauses the System Processor and starts the emulator processor.

RESTORE EMULATOR REGISTERS

The emulator processor is force-jumped to its on-board PROM, which contains a restore routine. The emulator processor reads the location in Program Memory and restores its registers to their original value. The emulator processor then continues to the next instruction. This process is repeated for each instruction within the range set by the user.

Although this is a simplified version of the actual events that take place during TRACE, it illustrates the cooperation required between modules within the μ Processor Lab.

Debug and Front Panel I/O Module

SYSTEM BUS CONTROL

The Debug module is, among other things, the "traffic cop" of the μ Processor Lab. Recall that all modules in the μ Processor Lab share the same address bus, data bus, and part of the control lines. (Refer back to Fig. 1-2.) Bus contention could become a problem without the Debug module. The Debug module insures that only one processor (either the System Processor or the emulator processor) has control of the bus at any time. As its name implies, the Debug module also controls debugging operations and controls the front panel. Figure 1-5 illustrates a block diagram of the Debug and Front Panel I/O module.

DEBUGGING FUNCTIONS

The debugging responsibilities of the Debug module have been explained in part in the discussion of the emulator processor. The Debug module has several registers dedicated to debugging operations. Breakpoint addresses are stored in registers on the Debug module (see Fig. 1-5). The stored addresses are compared to the

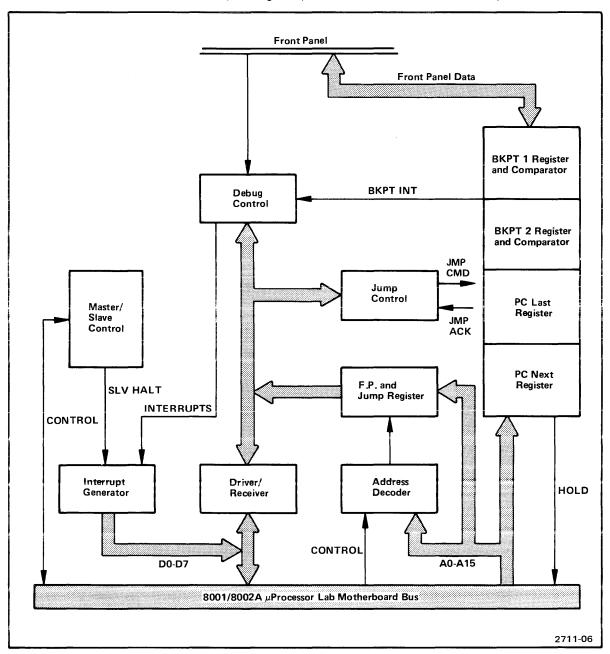


Fig. 1-5. $8001/8002 \text{A} \, \mu \text{Processor Lab Debug and Front Panel I/O Module Block Diagram}.$

This module prevents bus contention, controls debugging operations, and provides an interface to the μ Processor Lab front panel. The Debug module contains breakpoint, forced jump, and program counter registers used during debugging operations. The Debug module is under direct control of the System Processor module.

addresses placed on the system address bus by the emulator processor. If the addresses match, the Debug module informs the System Processor. The trace functions of the Debug module were discussed in the emulator processor text.

FRONT PANEL INTERFACE

The Debug module interfaces the front panel (either the standard or Maintenance Front Panel) to the rest of the μ Processor Lab system. This function is shown in Fig. 1-5. The Maintenance Front Panel allows the user complete control of the μ Processor Lab, indicates the states of the address and data buses, and allows debugging operations to be set and exercised without the use of a terminal.

System and Program Memory Modules

8001 SYSTEM MEMORY

The memory modules in the 8001/8002A μ Processor Lab are simple enough in themselves that they will not be discussed in any great detail. Figure 1-2 shows their relationship to the rest of the system. Recall that the software operating system for the 8002A μ Processor Lab (TEKDOS) is stored on disc, and placed in System Memory as required. Since the 8001 μ Processor Lab does not have disc drive capability, the 8001 μ Processor Lab system software (TEKOPS) must reside in the 8001 System Memory module. The 8001 System Memory module is made up of 6K of ROM (containing TEKOPS) and 2K of RAM. An additional 32K of ROM space is available.

MEMORY ACCESS

One other comment about memories: Keep in mind that while the System Processor module can access both System Memory and Program Memory, the emulator processor can access only Program Memory.

Assembler Processor*

The Assembler Processor module is basically a translator. It translates assembly code into machine code. In very simplified terms, it works as described in the following paragraphs.

LOADING ASSEMBLER SOFTWARE

The system user writes an assembly language program for a specific microprocessor or microcomputer. The program is stored in Program Memory as it is written, and then transferred to disc on the 8002A μ Processor Lab Flexible Disc Unit. Before the user can use the program, it must be translated into machine code to be understood by the emulator processor. To accomplish this translation, the user types ASM on the system terminal. TEKDOS loads the assembler program into System Memory, where it will reside during the entire assembly operation. The System Processor module then loads an assembler table into Program Memory. Each emulator processor has a different assembler table. The assembler table contains the correct machine code for translating assembly language into machine language.

ASSEMBLER OPERATION

After it has loaded the assembler table into Program Memory, the System Processor reads the first line of assembly code from the disc into System Memory. The Assembler Processor reads a command from the first field of the assembly language, and translates the command into machine code for storage in Program Memory. The Assembler Processor then reads and translates a command from the second field. The System Processor then reads the second line of assembly code from disc and the translation takes place again. This action is repeated until the entire file is assembled and stored in Program Memory. At that point, the emulator processor can begin execution of the program.

Remember that this is a simplified explanation of the assembly operation. More information can be obtained by reading the 8002A μ Processor Lab Assembler and Emulator User's Manual that corresponds to your emulator processor.

System Communications Module

A block diagram of the System Communications module is found in Fig. 1-6. The System Communications module gives the μ Processor Lab system the capability to communicate with other computers, or to run a line printer, a terminal, or a paper tape reader/punch. This communication is accomplished with three RS-232 compatible I/O ports. The ports are accessible on the rear panel of the μ Processor Lab. See Fig. 1-2.

SOFTWARE DOWNLOADING

One of the uses of the System Communications module is to download software from another computer system. This feature is particularly useful in the 8001 μ Processor Lab. Software can be developed on an external computer, transferred to the 8001 μ Processor Lab via the System Processor, and stored in Program Memory. Information transfer is accomplished by using the COMM command.

HARDWARE OPERATION DURING DOWNLOADING

Once an information transfer link (such as a modem) is established, the user can enter the COMM command from the system console. The System Processor then writes a command byte to the System Communications module, setting up operating parameters. One of three asynchronous communication devices (ACIA) on the System Communications module is activated, allowing information to be placed on the system data and address buses. The System Processor then writes the information to the Program Memory module. The System Processor also handles protocol for the System Communications module.

MEMORY MAPPING INSTRUCTIONS

A secondary function of the System Communications module is memory mapping. Recall that in emulation mode 1 the emulator processor may selectively execute out of Program Memory or prototype memory. The System Communications module contains a bit map RAM. See Fig. 1-6. The bit map RAM is loaded by the System Processor when the MAP command is used. The bit map defines whether the emulator processor is to work out of Program Memory or prototype memory for each address.

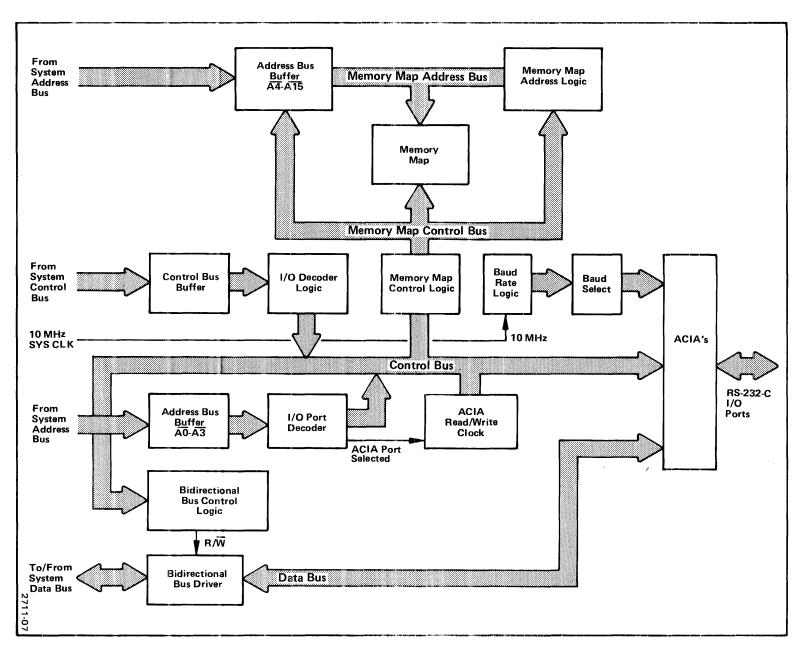


Fig. 1-6. 8001/8002A μProcessor Lab System Communications Module Block Diagram.

The System Communications module provides two services to the μ Processor Lab: communications with external peripherals or a host computer, and memory mapping control for the emulator processor.

SOFTWARE

Both the 8001 and 8002A μ Processor Labs have software operating systems. The 8001 operating system (TEKOPS) is contained in PROM on the 8001 System Memory module. The 8002A operating system (TEKDOS) is disc-based: the operating system software is contained on disc, and portions of it are transferred to RAM memory in the 8002A System Memory module as needed. The major difference between TEKDOS (8002A) and TEKOPS (8001) is that TEKDOS has greater software manipulation capabilities than does TEKOPS. In this discussion, we will describe TEKDOS, keeping in mind that TEKOPS performs many of the same functions, only in a different manner.

TEKDOS is a module, or block, oriented software system. The reason for this is size. The amount of memory that would be required to contain all of TEKDOS is far greater than the 16K bytes available. Therefore, TEKDOS is organized into blocks, or software modules, that can be transferred from disc to System Memory.

When an 8002A μ Processor Lab is booted up, several blocks of software are loaded from disc to System Memory. These blocks are the basic operating system and can be thought of as a system monitor. More information on TEKDOS can be found in the 8002A μ Processor Lab System User's manual.

When TEKDOS is loaded, it takes up all of System Memory, excluding a portion from address 1500H to 1BFFH. Figure 1-7 shows a map of System Memory with TEKDOS loaded.

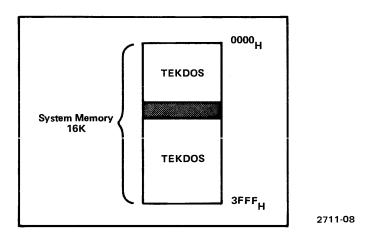


Fig. 1-7. TEKDOS as it appears in 8002A System Memory.

Notice the grey area in Fig. 1-7 near the center of the System Memory address range. This grey area represents that area of System Memory not filled by TEKDOS. This area is called the overlay area. The next few paragraphs will explain the use of the overlay area.

1-18

Overlay Area

Recall that when TEKDOS is loaded, only a portion of TEKDOS is transferred to System Memory. Portions remaining on the disc include:

most of the TEKDOS commands;

all debug commands; and

all special commands, including RTPA and emulator processor commands.

When a command is entered from the terminal, TEKDOS receives the command and looks for the command in a list called the command table. The command table is a list of every valid command for a particular version of TEKDOS. Also within the command table is an internal file name for each command.

Let's suppose that the DEBUG command is entered. TEKDOS receives the command from the terminal, then looks for DEBUG in its command table. The command table tells TEKDOS that DEBUG is a valid command, and gives TEKDOS the internal file name for DEBUG. Since DEBUG is a valid command, TEKDOS goes out to disc, and searches the internal file directory for the internal file name of DEBUG. When the file is located, TEKDOS transfers the file to the overlay area in System Memory. Figure 1-8 shows an expanded view of the overlay area.




Fig. 1-8. System Memory Overlay Area.

As you can see, the overlay area is divided into two parts. When the internal file containing DEBUG is retrieved from disc, the debug routine, called debug control, is placed into overlay area 1. TEKDOS then turns system control over to this routine. Debug control initializes the system to work in a debug mode, and then returns control to TEKDOS. TEKDOS then waits for the next command from the terminal.

When the next command is a debug command, like TRACE ALL, the same procedure is repeated for the new command. TEKDOS searches its command table, then retrieves the internal file containing TRACE ALL from disc. The program for TRACE ALL is stored in overlay area 2. During all debug operations, the debug control software remains in overlay area 1; the contents of overlay area 2 change with each debug command change.

You should understand that debug commands and operations are not the only software functions that use the overlay areas in System Memory. The 8002A μ Processor Lab System Reference Booklet shows each command that uses an overlay, and the overlay area used. The 8002A μ Processor Lab User's Manual also lists each system command and the overlay areas used.

To summarize, the debug control routine is loaded from disc into overlay area 1 as an overall control element. Then each debug command entered at the terminal is loaded into overlay area 2. Once a specific debug command is loaded, execution of the user program can be started with GO or a similar command. Execution of the program by the emulator processor then falls under control of the debug command in overlay area 2.

What Happens When You Enter TRACE ALL?

Up to this point we have discussed the general hardware capabilities of each module in the 8001/8002A μ Processor Lab. And we have briefly covered the operation of the 8002A μ Processor Lab operating software, TEKDOS. Now, we will examine the operation of the μ Processor Lab as a whole.

The following example describes most of the operations occurring within an 8002A μ Processor Lab when TRACE ALL is entered at the terminal. The TRACE ALL command involves single-step execution of a program contained in Program Memory. At the end of each instruction, the active emulator processor is halted, and its register contents are either stored on disc, or displayed to the user. In this way, the program is "traced", step by step.

In order for this example to be useful, some assumptions must be made. First of all, we assume that you have some knowledge of TEKDOS—its command structure, general operation, etc. For more information concerning TEKDOS, see the $8002A\,\mu$ Processor Lab System User's Manual. Secondly, this example is built around an operating $8002A\,\mu$ Processor Lab, with a current TEKDOS disc loaded. We assume that an emulator processor module is plugged into the mainframe of the 8002A.

Because a number of hardware control lines are mentioned in the following text, it may be valuable to study the theory of operation sections located later in this manual.

As a convention, those commands that would be entered by the user are all uppercase and underlined.

1-20

Command: LOAD (filename)

Action:

- 1. The System Processor (under control of TEKDOS) searches the command table to determine which system file to load (in this case, the internal file name for LOAD). Then, from the file directory, the System Processor calculates where that file resides on the disc.
- 2. The system Processor reads the LOAD program into System Memory overlay area 1. TEKDOS turns execution over to LOAD.
- 3. LOAD issues a SVC (service call) to the operating system (TEKDOS) to determine the location of (filename).

LOAD USER'S **PROGRAM** FILE

4. The LOAD program reads (filename) (in Tektronix Hexadecimal format) into System Memory, then causes the System Processor to transfer (filename) (in object code) into Program Memory.

Command: EMULATE Ø Command: DEBUG

Action:

LOAD **DEBUG** SOFTWARE

- The System Processor (TEKDOS) searches the command table and finds the internal file name for DEBUG. DEBUG is then loaded into System Memory overlay area 1.
- 6. TEKDOS turns control over to DEBUG. DEBUG directs the system to operate in a debug mode. DEBUG then returns control to TEKDOS.

Command: TRACE ALL

Action:

LOAD TRACE SOFTWARE

- 7. The System Processor (TEKDOS) searches the command table, finds the internal file name for TRACE, and loads TRACE into System Memory overlay area 2.
- 8. TEKDOS turns control over to the TRACE program. TRACE sets up the Debug and Front Panel I/O module for single-step operation.

Command: GO 300

Action:

MOVE **EMULATOR** REGISTER **VALUES** TO SYS. **MEMORY**

- The System Processor swaps the register save area of System Memory with the first few bytes of Program Memory. The register save area contains random data if this swap is performed before the emulator processor is initialized. The primary purpose of this action is to allow the user to set the emulator processor registers before execution begins, by using the DSTAT or SET commands. If these commands are used, the register values set by the user are stored in the register save area of System Memory. The number of bytes in the register save area is emulator-dependent.
- 10. The debug control routine writes the address of the emulator processor register restore routine into the Jump Address Register on the Debug module.
- 11. The debug control routine causes the System Processor to write a command byte to the Debug module. The command byte has bit 2 asserted. Bit 2 tells the Debug module to force jump the emulator processor the next time the emulator processor is activated.
- 12. DEBUG causes the System Processor to halt. The Debug module immediately releases the SLV PAUSE line, allowing the emulator processor to become active. As soon as the emulator processor is started, the Debug module forces the JMP CMD (jump command) line low.

JUMP TO RESTORE ROUTINE

- 13. When the JMP CMD line goes low, jump logic on the emulator processor forces an unconditional absolute jump code onto the emulating microprocessor's data bus during its fetch cycle. The emulator processor then forces the JMP ACK control line low, acknowledging to the Debug module that its jump command is received.
- 14. When the Debug module receives JMP ACK from the emulator processor, it places the contents of the Jump Address Register (previously loaded by the debug control routine) on the system address bus.

- 15. Jump logic on the emulator processor forces the high and low bytes of the jump address onto the emulating microprocessor's data bus one at a time (for 8-bit microprocessors) and in the proper order. The emulator processor then restores JMP ACK high.
- The absence of the JMP ACK signal causes the Debug module to remove the Jump Address Register contents from the system address bus.

NOTE

At this point, the debug control software has been loaded into System Memory. The control software has transferred a portion of Program Memory into System Memory for storage and possible alteration. The System Processor has issued a forced jump address (containing the address of the register restore routine) to the Debug module. The Debug module has passed the address on to the emulator processor.

EMULATOR PROCESSOR BEGINS RESTORE ROUTINE

- 17. The emulator processor has now received the address of the beginning of the restore routine located in PROM on the emulator processor. The emulator processor begins execution of that routine by fetching the first byte.
- 18. The restore routine loads the register contents back into their proper locations. The register contents may have been changed by DSTAT or SET.
- 19. The emulator processor executes a debug SVC 1 resulting in an access to the Debug module I/O port F1. This causes a SVC interrupt of the Debug module.
- 20. The SVC interrupt causes the Debug module to force the SLV PAUSE control line low. SLV PAUSE forces the emulator processor off the system bus. The emulator processor responds by forcing its RUN line high.
- 21. Upon seeing RUN removed, the Debug module removes MSTR PAUSE, thereby allowing the System Processor to resume execution, and to also respond to the SVC interrupt.

- 22. The System Processor swaps the register save area in System Memory with the first few bytes of Program Memory. This action restores the Program Memory to its original state.
- 23. After System Memory and Program Memory have been restored to their original condition, the debug control routine loads the destination address of the previously entered GO command (in this case 0300H) into the Jump Address Register on the Debug module.

JUMP EMULATOR TO USER ADDRESS AND EXECUTE

- 24. Steps 11 through 17 are repeated for the GO address. However, at step 17, the emulator processor fetches the instruction located at address 0300.
- 25. Recall that when TRACE ALL is active, the emulator processor is performing single-step operations. Each time the emulator processor executes an instruction, the program counter registers on the Debug module must be updated. The SLV OPREQ and FETCH control lines (generated by the emulator processor during the address fetch) cause the Debug module to store the contents of the address bus in the P.C. Last register. SLV OPREQ and FETCH also cause the Debug module to issue a single-cycle interrupt to the System Processor.
- 26. The System Processor, even though it is paused, acknowledges the single-cycle interrupt by forcing the MSTR INTD line low.
- 27. At the same time the System Processor acknowledges the single-cycle interrupt, the Debug module lowers the JMP CMD line, thus issuing a jump command to the emulator processor.

UPDATE P.C. REGISTERS

28. On the next emulator processor fetch, rather than fetching the next user instruction, the emulator processor fetches a jump instruction. At the same time, the Debug module stores P.C. Next (the next program counter value).

- 29. When the emulator processor fetches the forced jump instruction which is hard-wired on the emulator processor itself the Debug module asserts SLV PAUSE. This causes the emulator processor to remove itself from the system bus. The emulator processor RUN line is forced high.
- 30. The Debug module, upon seeing that RUN is high, allows MSTR PAUSE to go high. This allows the System Processor to run and respond to the single-cycle interrupt.
- 31. The System Processor now asserts the INTACK and DEBUG VEN (Debug Vector Enable) lines.
- 32. DEBUG VEN causes the Debug module to place the single-cycle interrupt vector address on the data bus.
- 33. The System Processor now enters the single-cycle interrupt service routine.

NOTE

At this point, the emulator processor has executed the first instruction in the user program. Now, the System Processor module will cause the emulator processor to dump its new register contents into Program Memory.

34. The System Processor writes a control byte to the emulator processor. This enables the emulator processor dump and restore PROM, and activates the module in the special MEMSW mode. However, if the emulator processor was in emulation mode 0, it does not enter the MEMSW mode but remains in mode 0.

EMULATOR PROCESSOR DUMPS REGISTERS

- 35. The System Processor swaps the register save area of System Memory with the first few bytes of Program Memory.
- 36. The System Processor forces the emulator processor to execute the forced jump routine.

- 37. The emulator processor stores the contents of its registers in the first few locations of Program Memory. The emulator processor then executes the debug SVC 1.
- 38. The System Processor swaps the register save area of System Memory with the first few bytes of Program Memory; this returns Program Memory to its original condition.
- 39. The debug control program causes the System Processor to read P.C. Last and P.C. Next from the program counter registers on the Debug module. The System Processor then reads the instruction just executed from Program Memory. If the last instruction was executed from prototype memory, the System Processor performs a UGET operation to retrieve the instruction from prototype memory.

The Program Counter values, instruction, and register values previously stored constitute a line of trace data.

- 40. The System Processor then either displays the trace data on an output device or stores the data in a disc file.
- 41. The debug control routine loads the next address into the jump address register on the Debug module. Steps 11 through 17 are repeated for this address. However, at step 17, the emulator processor fetches the instruction located at the new address.

The sequence from step 25 through step 41 is repeated for each instruction in the user program. In this way, the program counter values for each instruction, the emulating microprocessor's register values, and the instruction itself can be stored or displayed.

We have just followed an emulator processor through a complete cycle of instruction execution while in the debug mode of operation. This provides a good example of the interaction between the System Processor, the Debug module, the emulator processor, Program Memory, and System Memory.

1-26

Section 2

SPECIFICATIONS

INTRODUCTION

The specifications in this section apply to the basic $8001/8002A \mu$ Processor Lab, consisting of the following units:

8001 μProcessor Lab Standard Modules

System Processor System Memory

System Communications
Debug and Front Panel I/O
Program Memory (one module)

Power Supplies

+5.2 Vdc

+12.0 Vdc 30 Vac

-12.0 Vdc 60 Vac

8002A μProcessor Lab Standard Modules

System Processor System Memory

System Communications
Debug and Front Panel I/O

Assembler Processor

Program Memory (two modules)

Power Supplies

+5.2 Vdc

+12.0 Vdc 30 Vac -12.0 Vdc 60 Vac

μPROCESSOR LAB CHARACTERISTICS

The input power requirements (list 1, following) are for the basic configuration only. The electrical, environmental, and physical characteristics are general. For details on environmental test procedures, including failure criteria, contact your local Tektronix Field Office or representative.

1. Electrical Characteristics

Input Voltage 115 Vac $\pm 10\%$ or 230 Vac $\pm 10\%$.

A switch S2 on the back panel selects

the two operating voltages.

Frequency 60 Hz $\pm 10\%$

 $(50 \text{ Hz} \pm 10\% \text{ special order})$

Input Power 3.6 Amps (max) at 115 Vac, 60 Hz.

Fuses

Primary (F4)

 $\pm 12~\text{Vdc}$

Supply (F3)

60 Vac (F1)

50 Vac (F2)

6A at 115 Vac, 3A at 230 Vac

2A at 115 Vac, 1A at 230 Vac

0.5 Amps

0.5 Amps

GND and AUX BUS

A terminal block (TB2) on the back panel of the µProcessor Lab has connections for an (AUX BUS), Logic Ground (LOGIC GND) and earth ground (CHASSIS) GND. CHASSIS GND and earth ground are connected together internally. A shorting strap on the terminal block provides a single common tiepoint between logic ground and chassis ground. If the shorting strap is removed, a 1 $M\Omega$ bleeder resistor maintains a limited potential difference between logic ground and chassis ground. Logic ground is the ground bus for the μProcessor Lab modules. AUX BUS and LOGIC GND are connected to separate lines on the motherboard. The AUX BUS may be used to apply auxiliary power if desired.

2. Environmental Characteristics

Temperature (in degrees)

Operating

Storage

Humidity

Altitude

Operating Storage

0°C to +40°C (+32°F to +104°F) -40°C to +75°C (-40°F to +167°F)

To 90% relative non-condensing

To 15,000 feet (4.572 km) To 50,000 feet (15.24 km)

3. Physical Characteristics

Dimensions (Overall)

 Height
 24.66 cm (9.62 inches)

 Width
 48.31 cm (18.842 inches)

 Length
 57.3 cm (22.347 inches)

Weight Approximately 30 kg (66 lbs)

μProcessor Lab Power Supplies

1. Electrical Characteristics

Output Power

 +5.2 Vdc
 25 Amps

 +12 Vdc
 3.4 Amps

 -12 Vdc
 3.4 Amps

Overload Protection Automatic current limit foldback.

Line regulation

+5.2 Vdc

+12 Vdc Within .05% for 10% line voltage change.

-12 Vdc

Load Regulation

+5.2 Vdc

+12 Vdc Within .05% for 50% load change.

-12 Vdc

μProcessor Lab Standard Module Power Requirements

1. System Processor

| | | Current | | | | |
|------|----------------------|---------|---------|--|--|--|
| | Voltage | Typical | Maximum | | | |
| | +5.2 Vdc | 2A | 2.5A | | | |
| | +12 Vdc | 0.05A | 0.08A | | | |
| | -12 Vdc | 0.05A | 0.08A | | | |
| 2. 1 | 6K Dynamic RAM | | | | | |
| | +5.2 Vdc | 1.2A | 1.5A | | | |
| | +12 Vdc | 0.085A | 0.6A | | | |
| 3. S | ystem Communications | | | | | |
| | +5.2 Vdc | 1.6A | 1.9A | | | |
| | +12 Vdc | 0.128A | 0.385A | | | |
| | -12 Vdc | 0.128A | 0.385A | | | |
| | | | | | | |

4. Debug and Front Panel I/O

+5.2 Vdc 2A 2.5A

5. 8001 System Memory

+5.2 Vdc 1.1A & 1.7A &

65 mA/2K bank 90 mA/2K bank

6. High-Speed Memory

+5.2 Vdc 1.2A 1.8A +12 Vdc 0.085A 0.9A -12 Vdc 0.014A 0.018A

7. Assembler Processor

+5.2 Vdc 0.5A undefined

ACCESSORIES

8001 µProcessor Lab Standard Accessories

8001/8002A μ Processor Lab Installation Guide 8001 μ Processor Lab System User's Manual 8001 μ Processor Lab System Reference Card

8002A μProcessor Lab Standard Accessories

8001/8002A μ Processor Lab Installation Guide 8002A μ Processor Lab System User's Manual 8002A μ Processor Lab System Reference Card

Optional Accessories

For an up-to-date listing of the available optional accessories and support items, refer to the Tektronix Products catalog or contact the nearest Tektronix Field Office or representative.

PERIPHERAL EQUIPMENT

Standard Peripheral Equipment

Flexible Disc Unit (8002A µProcessor Lab only)

Optional Peripheral Equipment

Tektronix CT8100 CRT Terminal Tektronix CT8101 Printing Terminal (TTY) Tektronix LP8200 Line Printer

Section 3 SYSTEM PROCESSOR MODULE

INTRODUCTION

The System Processor module handles processing tasks, controls other modules, and performs I/O transfers with the Flexible Disc Unit and the system terminal.

CIRCUIT DESCRIPTION

General

The System Processor Module is divided into five major sections for this discussion:

- the 2650 microprocessor and its supporting logic
- interrupt priority decoding and interrupt vector generation logic
- I/O logic for communication with the Flexible Disc Unit and the system terminal
- baud rate and interval timer logic
- program memory bank select logic

2650/2650A Microprocessor and Supporting Logic (A)



The 8001/8002A System Processor Module uses either a 2650 or 2650A microprocessor. All references in this text to a 2650 microprocessor also pertain to the 2650A microprocessor except where noted.

The 2650 microprocessor supporting logic consists of clock logic, bus driver/receivers that interface with the 8001/8002A system buses, system control signal logic, and some logic associated with the microprocessor itself.

For detailed information about the 2650/2650A microprocessor, refer to the Signetics 2650/2650A Reference Manual.

The support logic for the 2650 microprocessor is discussed in the following order:

- 2650 Clock Logic
- Bidirectional Data Bus Buffers
- Address Bus Buffers
- System Bus Control Logic and Buffers
- System Processor Pause Logic
- System Processor Read and Write Timing
- Power-on Reset

2650 CLOCK LOGIC



The 2650 clock is generated by a 10 MHz oscillator. The 10 MHz oscillator uses a seriesresonant crystal as a feedback element across two cascaded inverting amplifiers. The 10 MHz output is buffered onto the system bus as SYS CLK for Emulator Processor use.

The 10 MHz clock is also divided by eight in two stages to produce the 2650 clock. The first stage consists of a divide-by-four circuit, which divides the 10 MHz oscillator frequency into a 2.5 MHz clock. The second stage consists of a flip-flop (U5030) that divides the 2.5 MHz output by two, resulting in the 1.25 MHz clock used by the 2650. The flip-flop is also controlled by an external hold signal (FP HOLD). FP HOLD provides a means for stopping the 2650 clock in the low state for any number of half cycles. FP HOLD is generated from the Maintenance Front Panel during a single-step or a breakpoint operation.

BIDIRECTIONAL DATA BUS BUFFERS (1A)





The 2650 data lines are buffered by bidirectional bus driver/receivers (U5060, U5070). The receivers collect data from the system bus and transmit it to the 2650. The drivers take data from the 2650 and transmit it to the bus. The bus driver/receivers are controlled by the ANDed result of the RUN and R/W outputs from the 2650. When the 2650 is in a 'run' state, RUN is high and the driver/receivers are enabled by the R/W output. If the 2650 is not running, RUN is low and the bus is in the input mode. In this state, the data bus has a high input impedance and can be driven by other modules in the system.

ADDRESS BUS BUFFERS (1A)





Tristate drivers buffer the address outputs from the 2650 and drive the system address bus. These drivers (U4040, U4050, U5040) are controlled by an inverted RUN output from the 2650. When the 2650 is running, RUN is high and the drivers are enabled, thus passing signals to the address bus. If the 2650 is halted, RUN is low and the drivers are disabled and put into a highimpedance state. The address bus is then controlled by external devices, such as an emulator processor.

SYSTEM BUS CONTROL LOGIC AND BUFFERS





Appendix A contains a list defining all system bus lines. Refer to this list while reading the following text.

This circuit block contains the logic that converts 2650 control signals into system control signals. Tristate drivers buffer the signals INTACK, FLAG, WRP, and M/10 from the 2650 to the system. RUN is inverted and brought out to the system bus as two signals: RUN and MASTRUN.

The OPREQ signal is generated differently by the 2650 and 2650A microprocessors. On a System Processor Module using a 2650, OPREQ is ANDed with INTACK and delayed 250 ns by an RC network (R2171, C2162, and CR2171). The resultant signal is squared by a Schmitt trigger and then input to a tristate driver (U3080) which is enabled by the inverted RUN output. The 250 ns delay guarantees that all system bus address, data, and control lines are valid when OPREQ is asserted.

On a System Processor Module using a 2650A microprocessor, OPREQ is internally delayed 250 ns to guarantee that all system bus address, data, and control lines are valid when OPREQ is asserted. OPREQ is gated the same as for a 2650 except that the RC network is removed.

Two bus control lines, not in the Bus Control Logic block, are inputs to the 2650; the System Processor control bus signals HOLD and SENSE. These two control lines are inverted and drive the OPACK and SENSE inputs of the 2650, respectively.

SYSTEM PROCESSOR PAUSE LOGIC

The System Processor is paused when the MSTPSE control line is brought low by the Debug and Front Panel I/O module (refer to Section 6). When this line goes low, the 2650 finishes its current instruction, then makes its RUN output go low. The low state of the RUN line puts the address and data bus buffers into a high-impedance state. Emulator processor modules can then control the address and data buses.

SYSTEM PROCESSOR READ AND WRITE TIMING

Timing diagrams for Read and Write operations are shown in Fig. 3-1. HOLD is generated by the memory or I/O device when data is not read or written within 200 ns of OPREQ going low. HOLD remains until read-data is valid, or write-date is received.

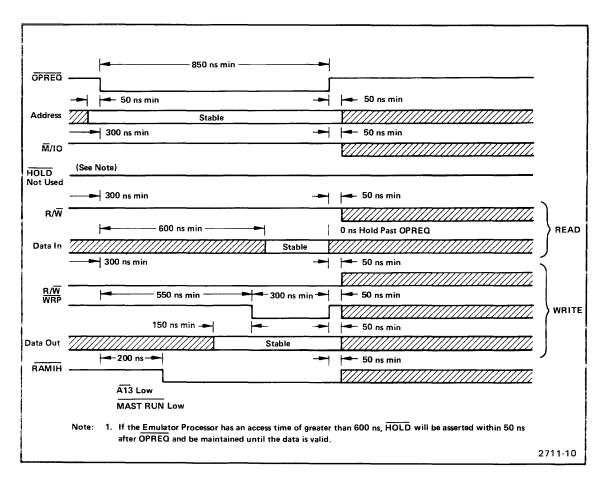


Fig. 3-1. System Processor M/IO Read and Write Timing Diagram.

POWER-ON RESET (1A)



The Reset Logic is provided to initialize the system and to restart the 2650 during power-up. When the 5.2 V power supply reaches its operating level, the power-on detector (U2150A) initiates a reset signal (RESET). RESET causes the 2650 to fetch and execute the instruction at address 0000 in system memory.

RESET is inverted and becomes PON in the rest of the System Processor module. RESET is also sent system-wide to reset the rest of the modules.

The Power-On Reset circuit consists of a series RC circuit, which charges during power-up, and a Schmitt trigger, which provides a high 50 ms pulse. The Schmitt trigger output is buffered by an inverting open-collector driver which drives the system bus control line RESET. This allows a high PON to be initiated from the Power-On Reset circuit or by RESET.

Interrupt Logic





GENERAL

The 8001/8002A μProcessor Lab operates with an interrupt-driven System Processor. An interrupt suspends normal program execution to execute a higher-priority service routine. After completing the service routine, the interrupted program is restored to the point where it was interrupted. The System Processor module is capable of servicing up to 16 interrupts from other modules and devices in the µProcessor Lab. An additional 16 interrupts are generated on the Debug module.

The starting address of the service routine is called an interrupt vector. Priority and enabling of these vectors is controlled by logic on the System Processor module. Table 3-1 lists the interrupting devices, priorities, and vector addresses.

Interrupt Logic circuitry is discussed in the following order:

- Interrupt Input Logic
- Interrupt Sample and Hold Logic
- Priority Encoder and Vector Generator Logic
- Interrupt Vector Address Buffer
- Interrupt Vector Decoder
- System Processor Interrupt Control Logic

Table 3-1
INTERRUPT VECTORS

| | Vector | |
|----------|---------|------------------------------|
| Priority | Address | <u>Function</u> |
| 0 | 0000 | Reset |
| 1 | 0002 | System Memory Parity Error |
| 2 | 0004 | NA |
| 3 | 0006 | Program Memory Parity Error |
| 4 | 8000 | Console In |
| 5 | 000A | Console Out |
| 6 | 000C | System Communications 1 |
| 7 | 000E | System Communications 2 |
| 8 | 0010 | System Communications 3 |
| 9 | 0012 | Timer |
| 10 | 0014 | NA |
| 11 | 0016 | Flexible Disc |
| 12 | 0018 | NA |
| 13 | 001A | PROM Programmer 1 |
| 14 | 001C | PROM Programmer 2 |
| 15 | 001E | NA |
| 16 | 0020 | Emulator SVC 1 |
| 17 | 0022 | Emulator SVC 2 |
| 18 | 0024 | Emulator SVC 3 |
| 19 | 0026 | Emulator SVC 4 |
| 20 | 0028 | Emulator SVC 5 |
| 21 | 002A | Emulator SVC 6 |
| 22 | 002C | Emulator SVC 7 |
| 23 | 002E | Emulator SVC 8 |
| 24 | 0030 | Breakpoint 1 |
| 25 | 0032 | Breakpoint 2 |
| 26 | 0034 | Single Cycle |
| 27 | 0036 | Emulator Halted |
| 28 | 0038 | Diagnostic Interrupt |
| 29 | 003A | Real-Time Prototype Analyzer |
| 30 | 003C | Debug Interrupt 30 |
| 31 | 003E | Debug Interrupt 31 |

INTERRUPT INPUT LOGIC



Each interrupting device has a dedicated flip-flop called in Interrupt Flip-Flop associated with it. When a device requests an interrupt, the corresponding Interrupt Flip-Flop is set. The System Processor services 16 Interrupt Flip-Flops. Seven of these are located on the System Processor module (see Table 3-2A). The remaining nine Interrupt Flip-Flops are located on other modules of the μ Processor Lab (see Table 3-2B). All Interrupt Flip-Flop outputs appear on the system bus.

NA = Not Assigned

Table 3-2A INTERRUPT FLIP-FLOPS ON THE **SYSTEM PROCESSOR MODULE**

| Interrupt | <u>Function</u> | | |
|-----------|---|--|--|
| INT O | Reset | | |
| INT 2 | Tape Interrupt | | |
| INT 4 | Data Available Interrupt | | |
| INT 5 | TBMT Interrupt (Transmitter Buffer Empty) | | |
| INT 29 | RTPA Interrupt | | |
| INT 30 | Printer Interrupt | | |
| INT 31 | Disc Interrupt | | |

Table 3-2B **INTERRUPT FLIP-FLOPS THROUGHOUT** THE 8001/8002A μ PROCESSOR LAB

| Interrupt | <u>Function</u> | | |
|-----------|-----------------------------------|--|--|
| INT 1 | System Memory Parity Error | | |
| INT 3 | Program Memory Parity Error | | |
| INT 6 | System Communications Interrupt 1 | | |
| INT 7 | System Communications Interrupt 2 | | |
| INT 8 | System Communications Interrupt 3 | | |
| INT 12 | Not Assigned | | |
| INT 13 | PROM Programmer Interrupt | | |
| INT 14 | Not Assigned | | |
| INT 15 | Not Assigned | | |

INTERRUPT SAMPLE AND HOLD LOGIC (1B)



The Interrupt Sample and Hold Logic looks for an interrupt every 100 ns as long as there are no interrupts being serviced. No new interrupts will be recognized while an interrupt is being serviced. The interrupt acknowledge line, INTACK, is held high by the 2650 microprocessor while it is servicing an interrupt.

PRIORITY ENCODER AND VECTOR GENERATOR LOGIC



The latched Interrupt Flip-Flop output is input to the Priority Encoder and Vector Generator Logic. An interrupt vector is immediately generated for the Interrupt Flip-Flop with the highest priority. The order of importance of the interrupting devices has been preassigned, and is hardwired to reflect this priority. The interrupt vector that is generated corresponds to the highest-order bit position that is true. All lower-order bits are ignored. Table 3-1 lists priorities and vector addresses for the interrupts.

INTERRUPT VECTOR ADDRESS BUFFER



The interrupt vector is gated onto the system data bus by the Interrupt Vector Address Buffer during INTACK. (See Interrupt Sample and Hold Logic description.) Interrupt detection is repressed during INTACK. This prevents the interrupt vector from changing while it is read by the 2650.

The Interrupt Vector Address Buffer consists of tristate drivers (U4080, U4090) that drive the system bus. When the Priority Encoder and Vector Generator Logic senses an input line as low (interrupt present), the System Interrupt output line (SYS INT) immediately goes low. SYS INT is inverted and ORed together with the Debug module interrupt input line (DBG INT) from the system control bus. The resultant output is the 2650 interrupt request (INTREQ) and MST INTD. The 2650 microprocessor sets INTACK (from schematic 1A) high when it is ready to receive the interrupt vector and service the interrupting device. When SYS INT and INTACK are both high, the output of the NAND gate U3170B is low. This enables the tristate drivers of the Interrupt Vector Address Buffer.

INTERRUPT VECTOR DECODER (1B)



The interrupt vector is also sent to the Interrupt Vector Decoder (U2110, U2120). The Interrupt Vector Decoder is used to reset the seven Interrupt Flip-Flops located on the System Processor module (see Table 3-2A). When an interrupt vector is detected, the Decoder generates an output to reset the corresponding flip-flop.

SYSTEM PROCESSOR INTERRUPT CONTROL LOGIC



There are also 16 interrupt vectors generated on the Debug module. The Debug module interrupts have a lower priority than the System Processor module interrupts. This priority is established by the System Processor Interrupt Control Logic. Interrupts and their priorities are listed in Table 3-1.

When SYS INT is high, the DBG INT input generates the 2650 INTREQ. The Debug Vector Enable (DBG VEN) system bus control line controls the Interrupt Vector Address Buffer on the Debug Module. When INTACK is low and EO of U4110 (schematic 1B,, center) is low, DBG VEN is low and enables the interrupt vector onto the data bus.

I/O Logic

GENERAL

The system terminal and the Flexible Disc Unit communicate with the µProcessor Lab via the System Processor mmodule I/O Logic. The I/O Logic contains a serial interface for the system terminal (an RS-232-C compatible terminal or current loop TTY), and a parallel interface for the Flexible Disc Unit. Also provided are a buffered bidirectional data bus for System Processor I/O transfers, I/O port decoding logic, output data latches, and input gating.

The I/O Logic will be discussed in the following order:

- I/O Decoder Logic
- Read Decoder
- Write Decoder
- Data Bus Buffers
- System Terminal Interface
- Serial Control Register
- Serial Interface Input Logic
- Serial Interface Output Logic
- Flexible Disc Unit Interface
 - Parallel Control Register
 - Parallel Input/Output Data
 - Parallel Output Latch
 - Flexible Disc Status Buffer

I/O DECODER LOGIC (1¢)



The I/O Decoder Logic provides control signals to the Read Decoder, Write Decoder, and Bidirectional Data Bus Buffer. The I/O Decoder Logic is enabled when I/O ports E8—EF are addressed. Table 3-3 shows which inputs are sensed to enable the I/O Decoder Logic.

Table 3-3
I/O DECODER LOGIC ENABLE CHART

| Inputs | System Control Bus Lines | | | | | System Address Bus Lines | | | | | |
|-----------------------|-----------------------------|-----|-------------|-------|----------|-----------------------------|---|--------|--------|----|---------|
| | | | | I/O D | ecoder L | ogic Enabling Inputs | | | | | |
| Outputs | WRP | R/W | MAST RUN | OPREQ | M/IO | A13 | | A6 | A5 | Ā4 | — A3 |
| Read RD | | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 |
| <u>Wri</u> te WR | | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 |
| Write Pulse WRP | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 |

0 = Low 1 = High When RD, WR, WRP is 0, then output is enabled (active state).

The I/O Decoder Logic is enabled by NAND gate U2100. Control line $\overline{\text{MAST RUN}}$ is low when the 2650 is fetching and executing instructions. Control line $\overline{\text{OPREQ}}$ is low when the system address and data buses are valid and can be read. Address line $\overline{\text{A13}}$ is low and control line $\overline{\text{M}}/\text{IO}$ is high during the execution of an I/O instruction. The address states of A3—A7 correspond to I/O ports E8—EF. See Table 3-4.

Table 3-4
I/O PORT ADDRESS VALUES

| Address Bits Decoded By: | | _ | I/O Decod | ler Logic | | Read or | Write Dec | oders |
|--------------------------|----|---------|-----------|-------------|----|---------|-----------|-------|
| Address Bits: | Ā7 | Ā6 | Ā5 | Ā4 | Ā3 | A2 | Ā1 | AC |
| I/O Port | 0 | 0 | 0 | 1 | 0 | × | x | х |
| E8 | | | | | | 1 | 1 | 1 |
| E9 | | Adde | | Te the same | | 1 | 1 | 0 |
| EA | | , ess B | its | | | 1 | 0 | 1 |
| EB | | | 47.43° | | | 1 | 0 | 0 |
| EC | | | | e the sa | | 0 | 1 | 1 |
| ED | | | | , we | | 0 | 1 | 0 |
| EE | | | | | | 0 | 0 | 1 |
| EF | | | | | | 0 | 0 | 0 |

x = don't care 0 = Logic low

1 = Logic high

3-9

When the I/O Decoder is enabled, three control outputs are activated. The first control output, RD (Read), is low when the 2650 is performing a 'Read' operation. The second control output, WR (Write), is low when the 2650 is performing a 'Write' operation. The last control output is labeled WSTB (Write Strobe), and is the ANDed result of WRITE and the control bus line WRP. WRP is a high-low-high timing pulse. It is initiated from the 2650 during a write operation and used for clocking output latches and memory.

READ DECODER (1c) | 1



The Read Decoder has four output lines, labeled E8, E9, EA, and EB. Each line goes low when the corresponding I/O port (E8—EB) is read. The inputs to the Read Decoder are the system address bus lines A0—A2 and the RD (Read) output from the I/O Decoder Logic. When I/O ports E8—EB are read by the 2650, RD (Read) is low and the Read Decoder is enabled. See Table 3-4 for the value of address bits A0—A2 when I/O ports E8—EB are addressed.



The Write Decoder has six output lines labeled E8, E9, EA, EB, TINT, and BNK. I/O ports E8—EB correspond to Write Decoder output lines E8—EB. Write Decoder output lines TINT and BNK correspond to I/O ports EC and ED, respectively. The inputs to the Write Decoder are the system address bus bits AO—A2 and the WSTB (Write Strobe) output from the I/O Decoder Logic, When the 2650 writes to I/O port E8—ED and control line WRP is low, WSTB (Write Strobe) is low and enables the Write Decoder. Refer to Table 3-4 for the EC and ED address bit pattern.

DATA BUS BUFFERS (1D)



The I/O Logic bidirectional data bus buffers allow data transfers between the system data bus, the system terminal, and Flexible Disc Unit. The buffer is controlled by two inputs: Read (RD) and Write (\overline{WR}) outputs from the I/O Decoder Logic. When \overline{RD} is low, data is placed onto the system data bus from the I/O Logic. When WR is low, the I/O Logic inputs data from the system data bus.

SYSTEM TERMINAL INTERFACE

The System Terminal Interface provides an RS-232-C compatible interface and a TTY current loop for serial communications between the μ Processor Lab and the system terminal. An RS-232-C terminal and a TTY current loop terminal may not be used at the same time. The serial interface uses a Universal Asynchronous Receiver Transmitter (UART) to perform the serial-to-parallel and parallel-to-serial conversion for the system terminal.

3-10 @

SERIAL CONTROL REGISTER




The Serial Control Register Latches control bits from the bidirectional data bus to enable the TTY Interrupt Flip-Flops, select UART parity, and control a paper tape reader. The 2650 writes the control bits to I/O port E9. During the 'write' operation, Write Decoder output E9 goes low. (This output is a pulse, since WRITE STROBE, the enabling input, to the Write Decoder, is a pulse. Recall that WRITE STROBE is the ANDed result of output WRITE and input WRP of the I/O Decoder Logic.) It is this pulse (E9, TTY WRITE CONT) that clocks the Serial Control Register. The register then latches the control bits that were written by the 2650.

The Serial Control Register consists of three J-K type flip-flops. The first flip-flop (U3140) is used to control a TTY paper tape reader. This flip-flop is set high or low under program control, and is reset to low upon receipt of the start bit. One character is allowed to be read at a time. U4120 drives the output of U3140 (RDR CTRL(—)). The next flip-flop (U2140A) when set high, permits the UART (schematic 1C, center) to generate and check even parity. The last flip-flop (U2140B), when set high, enables the TTY Interrupt Flip-Flops (schematic 1B, left). The Interrupt Flip-Flops are set high or low under program control.

Table 3-5 shows the control bit locations in the 8-bit data byte that is placed on the data bus during a 2650 'write' operation to port E9.

Table 3-5
SERIAL INTERFACE I/O LOGIC PORTS

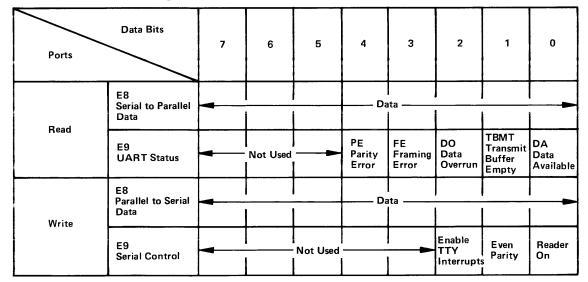

SERIAL INTERFACE INPUT LOGIC (10)



Serial data transmitted by the system terminal to the μ Processor Lab is input by the Serial Interface Input Logic. The Serial Interface Input Logic accepts either RS-232-C or current loop logic and converts it into parallel TTL logic.

When serial data is to be received by the μ Processor Lab, the 2650 must first enable the TTY Interrupt Flip-Flops (schematic 1B, center). The TTY Interrupt Flip-Flops are enabled by the Serial Control Register. The UART (schematic 1C, center) shifts the serial data into this register and sets the Data Interrupt (DA INT) output to a high when a complete character has been received. The transition of the DA INT output from low to high clocks a TTY Interrupt Flip-Flop, which causes the 2650 to be interrupted. I/O port E9 is then read by the 2650. This causes Read Decoder output E9 to go low and enables the UART Status Buffer (schematic 1C, center). The UART status outputs DA, TBMT, OR, FE, and PE are then placed on the bidirectional data bus and input to the 2650.

If no status errors are detected, I/O port E8 is read next. Read Decoder output E8 goes low and enables the UART Output Buffer, which gates the parallel data onto the bidirectional data bus for input to the 2650. At the same time, Read Decoder output E8 is used as the UART Reset Data Available (RDA) line. Output DA INT is then reset low and the UART is ready to receive another serial data character.

SERIAL INTERFACE OUTPUT LOGIC



Serial data transmitted by the μ Processor Lab to the system terminal is output by the Serial Interface Output Logic. The Serial Interface Output Logic converts the UART TTL serial output into RS-232-C output and current loop logic. An open-collector driver (U1120) is used for the current loop, and a bipolar driver (U4120B) for the RS-232-C output.

When serial data is to be transmitted by the μ Processor Lab, the 2650 must first enable the TTY Interrupt Flip-Flops (schematic 1B, center). The 2650 then places the character to be transmitted onto the bidirectional data bus during a write to I/O port E8. Next, the Write Decoder output line E8 goes from high to low to high, which corresponds to the time $\overline{\text{WRP}}$ (from the 2650) is low. This output is used to enable the UART to latch the character from the bidirectional data bus. The actual latching of the character into the UART port (DB0—DB7) occurs on the high-to-low transition of output E8. On the low-to-high transition, the UART shifts the character out serially. When a complete character has been shifted out, the UART sets the Transmit Buffer Empty (TBMT) output to high. The transition of the TBMT output from low to high clocks a TTY Interrupt Flip-Flop, which causes the 2650 to be interrupted. The 2650 sends the next character to the UART. This process is repeated until all characters have been transmitted.

The system terminal connector (a 25-pin connector conforming to RS-232-C standards) is mounted on the $8001/8002A\mu$ Processor Lab rear panel. This connector is connected by a ribbon cable to plug P2 on the top edge of the System Processor module.

To interface the system to an RS-232-C compatible terminal, certain signal lines are permanently pulled up high. These signal lines are Clear To Send, Data Set Ready, Signal Detect, Data Terminal Ready, and Request To Send. For further interface information, refer to the 8001/8002A μProcessor Lab Installation Guide.

Flexible Disc Unit Interface

The Flexible Disc Unit Interface provides parallel communication channels between the 8002A μProcessor Lab and the Flexible Disc Unit.

The Flexible Disc Unit Interface circuitry will be discussed in the following order:


- Parallel Control Register
- Parallel Input/Output Data
- Parallel Output Latch
- Flexible Disc Status Buffer

PARALLEL CONTROL REGISTER (1D)



The Parallel Control Register (U2040) latches control bits from the bidirectional data bus to direct the Flexible Disc Unit. The Control Register consists of six D-type flip-flops and four tristate buffers. Two flip-flop outputs enable the Disc and Printer Interrupt Flip-Flops in the Interrupt logic (schematic 1B). The four remaining flip-flops output signals to the tristate buffers that drive the Flexible Disc Unit control inputs.

Table 3-6 PARALLEL INTERFACE I/O LOGIC PORTS

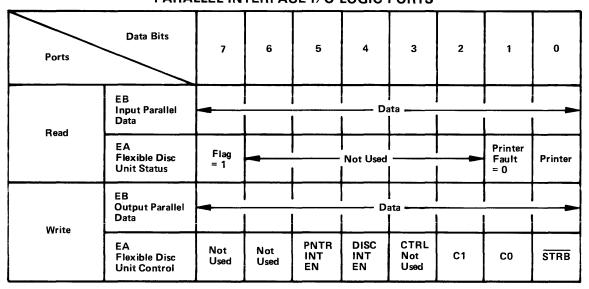

The process in which control bits are latched into the Parallel Control Register (Table 3-6) is the same as the process for the Serial Control Register. The only difference is that the 2650 now writes to I/O port EA rather than to I/O port E9.

PARALLEL INPUT/OUTPUT DATA (1D)





The Flexible Disc Unit input data lines (DIDO—DID7) are terminated by a Parallel Input Network and are received by the Parallel Input Buffer. The Parallel Input Buffer consists of tristate drivers (U2060B, U2070) that gate the data onto the bidirectional data bus during a read of I/O port EB. The tristate drivers are enabled when Read Decoder output line EB is low.

PARALLEL OUTPUT LATCH (C)





Output data is strobed into the Parallel Output Latch (U1040, U1060). The Parallel Output Latch consists of an 8-bit data register (U1040, U1060) and drivers that buffer the outputs. Output data is stored in the 8-bit data register during a 2650 write to I/O port EB. Write Decoder output line EB supplies the clocking signal.

FLEXIBLE DISC STATUS BUFFER (1D)



The Flexible Disc Unit status lines (PBZY, PFLT, TAPE, and FLG) are terminated with a Shaping Network (schematic 1D, lower center) and are received by the Flexible Disc Status Buffer (U2060A). The Flexible Disc Status Buffer consists of tristate drivers (U2060A) that gate the status bits onto the bidirectional data bus during a read to I/O port EA. The tristate drivers are enabled when the Read Decoder output line EA (schematic 1C, upper center) is low.

The three Flexible Disc Unit lines PBZY, TAPE, and FLG are also used as Flexible Disc Unit controller signals. These signals are input to the Shaping Network (schematic 1D, lower center) which consists of an RC filter and a Schmitt trigger. The Shaping Network converts the three signals into interrupts. PBZY, TAPE, and FLG become Printer Interrupt (PNTR INT), Paper Tape Reader Interrupt (TAPE INT), and Flexible Disc Unit Interrupt (DISC INT), respectively. The TAPE INT signal is provided so that a high-speed paper tape reader may replace the Flexible Disc Unit. Normally only the FLG signal is used.

Baud Rate and Timer Logic

The Baud Rate and Timer Logic will be discussed in the following topics:

- 10 MHz Oscillator
- Divider Network
- UART Clock and Number of Stop Bits
- Interrupt Timer Logic

10 MHz OSCILLATOR



A crystal-controlled oscillator identical to that used in the 2650 Clock logic is used for the baud rate clock and interval timer generators. The 10 MHz output of the oscillator is buffered onto the system bus as SYS CLK (System Clock).

DIVIDER NETWORK



The 38.4 kHz system I/O clock is provided by a circuit that divides the 10 MHz oscillator output by 260 (see Fig. 3-2).

The UART (schematic 1C, center) requires clock frequencies of 16 times the available baud rates. The 38.4 kHz output is the clock frequency for 2400 baud. The 38.4 kHz output is further divided by a series of divide-by-two circuits to provide clocks for 1200, 600, 300, and 150 baud. The clock for 1200 baud is also input to a divide-by-11 circuit, to provide the clock for 110 baud. The clock for 150 baud (2.4 kHz) is divided down by 24 to a 10 ms interval timer clock. The 10 ms interval timer clock is further divided down to a 100 ms interval timer clock. Both the 10 ms and the 100 ms interval timer clocks are jumper-selectable. Figure 3-2 shows the Baud Rate Clock Divider chain.

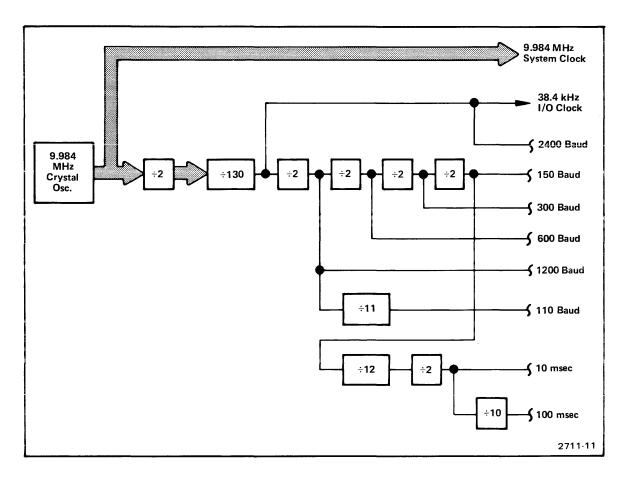


Fig. 3-2. Baud Rate Clock Divider.

UART CLOCK AND NUMBER OF STOP BITS



The receive and transmit portions of the Universal Asynchronous Receiver/Transmitter (UART) are clocked by the UART CLOCK line from U1160 of the UART Clock circuitry. The UART CLOCK line operates the UART at various baud rates.

The outputs from the Divider Network (schematic 1E, center) are fed to the UART CLOCK multiplexer (U1160). Refer to Fig. 3-2 for a list of outputs from the divider network. The frequency selected as UART CLOCK is determined by the Baud Rate Thumbwheel Switch (S1141). The outputs of S1141 control the multiplexer to generate the desired frequency. A truth table for the thumbwheel switch (S1141) is shown on schematic 1E. Table 3-7 shows the baud rate for each switch position.

In addition to selecting the baud rate, the thumbwheel switch (S1141) is used to determine the number of stop bits used by the UART. Outputs from the switch are applied to a gating circuit (U1150A, U1150B) to determine the number of stop bits used. The circuit also determines the use of parity bits by the UART at different baud rates. Table 3-7 shows the number of stop bits and the use of parity for each available baud rate.

Table 3-7
BAUD RATE THUMBWHEEL SWITCH SELECTION
AND FORMAT

| ThumbwheelPosition | Baud <u>Rate</u> | START | Data Format | STOP |
|--------------------|---------------------|-------|-------------|---------|
| 9 | 110 | S 0 1 | 2 3 4 5 6 | B P S S |
| 8 | 110 | S 0 1 | 2 3 4 5 6 | 7 S S |
| 7 | 150 | S 0 1 | 2 3 4 5 6 | PS |
| 6 | 300 | | same as 150 | |
| 5 | 600 | | same as 150 | |
| 4 | 1200 | | same as 150 | |
| 3 | 2400 | | same as 150 | |

INTERRUPT TIMER LOGIC



The Interrupt Timer Logic allows the 2650 to be controlled by a jumper-selectable 100 ms or 10 ms interval timer. The Interrupt Timer consists of two up-down counters (U5130, U5120). The counters divide the baud rate clock into 100 Hz and 10 Hz signals. See Fig. 3-2. On the low-to-high transition of the interval timer output (TIME INT), the Timer Interrupt Flip-Flop is clocked and the 2650 is interrupted.

Program Memory Bank Select Logic




The Program Memory Bank Select Logic allows the 2650 to access Program Memory. The System Processor accesses Program Memory by bank switching one 16K block of Program Memory (of a possible four 16K blocks) into the System Memory 16K-32K address space. The 16K block is specified by two control bits in a system I/O command.

Table 3-8 shows the control bit positions in the data byte that is placed on the data bus during a 2650 'write' operation to port EE. When I/O port EE is written to, the Write Decoder (schematic 1C, center) outputs a signal called BNK.

The 2650 address bit 14 (ADR 14) output controls the system address bus lines A14 and A15 (U3060A, U3060B), and also becomes the System / Program Memory Select line (CMEM). When the system address is 16K or above, ADR 14 is high and enables the latched control bits onto system address bus lines A14 and A15. Program Memory is also enabled by the CMEM output. If ADR 14 is low, System Memory is enabled: address bus lines A14 and A15 are forced high, thus addressing the first 16K block of System Memory.

Table 3-8.

TIMER INTERRUPT AND PROGRAM MEMORY
BANK SWITCH I/O PORTS

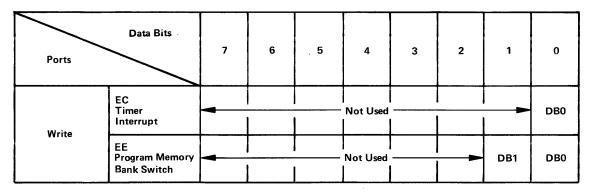

Section 4

16K DYNAMIC RAM MODULE

INTRODUCTION

The 16K Dynamic RAM module is used as Program Memory for the 8001 and 8002A μ Processor Labs, and as System Memory for the 8002A µProcessor Lab. The 16K Dynamic RAM module contains 16K X 8-bit words of memory, with a ninth bit used for parity. The 16K Dynamic RAM module can be configured for use with 16-bit microprocessors.

This section describes the following functions of the 16K Dynamic RAM module:

- 16K RAM Configuration
- RAM Memory
- Bootstrap PROM
- Data and Parity Control
- Address Control
- Configuration Logic
- Byte/Word Control
- Refresh Request Logic
- Operation Control and Timing

CIRCUIT DESCRIPTION

Refer to the 16K Dynamic RAM schematics while reading this text.

16K RAM Configuration





The 16K Dynamic RAM module is configured for use in System or Program memory, and for 8-bit oriented processors (byte mode) or 16-bit oriented processors (word mode), through the use of four switches and four jumpers. The functions and uses of these switches and jumpers are given in Tables 4-1 and 4-2.

NOTE

Reliability is reduced if 8002A μProcessor Lab Program Memory modules are reconfigured for System Memory Operation, or vice-versa. Reliability will also be reduced with the 8001 or 8002A if Program Memory is made up of both High-Speed and 16K Dynamic RAM modules.

Table 4-1
SWITCH AND JUMPER POSITIONS AND FUNCTIONS

| Switch Number | Switch Name | Switch Function |
|------------------|----------------|--|
| S4163-1 | A14 | When this switch is ON, the module will respond to memory addresses in which $A14=1$, provided all other selection conditions are met. |
| S4163-2 | A15 | When this switch is ON, the module will respond to memory addresses in which $A15=1$, provided all other selection conditions are met. |
| S4163-3 | | |
| J11, J12 | Sys/Prog | Setting this switch to the ON position configures the module for Program Memory. Setting this switch to the OFF position configures the module for System Memory operation. Note that for System Memory, jumper J11 must be added and J12 deleted; for Program Memory, jumper J12 must be added and J11 deleted. |
| S4163-4 | | |
| J9 J10 | HI/LO | To configure the module for byte-oriented processors, jumper J10 is installed and J9 is deleted. For use with work-oriented processors, J9 is installed and J10 is deleted. J10 allows the module to work as part of the memory pair required for word-oriented operation. |
| | | Switch S4163-4 is used only when a pair of memory modules is set for |

Switch S4163-4 is used only when a pair of memory modules is set for 16-bit word mode operation. If the switch is OFF, the module accepts bits $D\emptyset$ —D7 of the 16-bit data bus.

Setting this switch ON configures the module to serve as bits-D8—D15 of a 16-bit data bus, when memory modules are used in pair for 16-bit word mode operation.

Table 4-2
MODULE ADDRESS SWITCHES

| Program | | Switches | | |
|------------------|-------------------|----------|-----|--|
| Memory Module | Memory Address | A15 | A14 | |
| А | 0000 — 3FFF | OFF | OFF | |
| В | 4000 – 7FFF | OFF | ON | |
| С | 8000 – BFFF | ON | OFF | |
| D | C000 – FFFF | ON | ON | |

4-2

RAM Memory



The data storage of the 16K Dynamic RAM module is accomplished by a RAM array capable of storing 16,384 9-bit words; the ninth data bit is the parity bit. The memory is physically arranged in four rows of 4K X 1 dynamic RAM devices, with nine devices to each row. Each of the four rows is enabled by a Chip Enable input (CE1—CE4) from the Address Control circuitry (schematic 2B, top). Twelve address lines (AØ—A11) access the RAMs.

On each of the 22-pin RAM devices, address lines AØ—A5 access the 64 internal rows; lines A6—A11 address the 64 columns. To write, read, or refresh a row of devices, the respective Chip Enable signal (CE1, CE2, CE3, or CE4) is applied to the CE Clock input of each RAM device in that row.

Bootstrap PROM





The 16K Dynamic RAM module has the capacity to contain 256 bytes of PROM (Programmable Read Only Memory). When the module is used for 8002A System Memory, a 1702A PROM device is inserted in socket U6010. The PROM overrides the first 256 bytes of RAM address space, and is enabled when the System/Program switch (S4163-3, schematic 2A, lower left) is in the System position. (See Table 4-1.) The PROM contains the bootstrap routine to load TEKDOS from flexible disc into System Memory and to initialize the μ Processor Lab system at power-up or system reset. The PROM is used only for 8002A System Memory.

For 8002A System Memory modules, the PROM Address Decoder (U2100, schematic 2B, left) decodes PROM ADR to operate the PROM memory. PROM ADR is produced when A8—A15 and CMEM SW are all low.

Address lines to the PROM (AØ—A7) are run directly from the system address bus, through the PROM address buffers (U6030 and U6040), to the PROM (U6010). These lines are separate from the RAM address lines (ADØ—AD11), which go through the Address Control circuitry. PROM address lines are designed this way to allow refresh addressing of the RAM while the PROM is being accessed. The RAM may be refreshed at this time because Chip Enable (CE) is not in use.

When this module is used as System Memory, data from the Bootstrap PROM is read through the data output registers. The PROM Access one-shot multi-vibrator (U3170A, System Request Logic, schematic 2A, center) controls Read Strobe (RDSTR) to clock the data registers.

Data and Parity Control





Data to and from the 16K Dynamic RAM module is routed and checked for parity by the Data and Parity Control circuitry.

DATA WRITE

The memory module receives data lines DØ—D15 from the system data bus (labeled P1 on schematic 2C). These lines are received and buffered by tristate transceivers U4120 and U5120 (for lines DØ—D7) and U4130 and U5130 (for D8—D15). Only lines DØ—D7 are used with byte-oriented emulator processors. D8—D15 are used when two memory modules are used in pair for 16-bit word-oriented emulator processors.

In word (16-bit) mode, one module is designated as the low-byte module (bits DØ—D7), and the other as the high-byte module (bits D8—D15). In byte mode, or for the low byte of word mode, the buffers for DØ—D7 are enabled by the Write Low signal (WH) to receive data from the data bus. The buffers for D8—D15 are enabled to write data by Write High $\overline{\text{(WH)}}$.

Data from the bus is stored in the data registers (U4110 and 5110). It is then clocked by Write Data Strobe (WDSTR) to the Data In (DIN) inputs of the RAMs. When the RAM receives Write Enable (WE) signal (from the Timing Generator on schematic 2A), the data is written into the selected memory address. As data leaves the registers, even parity is generated by the parity generator (U3110, schematic 2C, upper left) and is stored in the ninth bit (parity) of the selected row of RAM. The parity RAMs are U1080, U2080, U3080, and U4080.

DATA READ

Data is read out of memory when the desired row of RAM is enabled. When the array is addressed, the selected data is read into the output registers (U4140 and U5140, schematic 2C, right). Upon receipt of Read Data Strobe (RDSTR from schematic 2A, right), data is latched from the output registers to the four data bus buffers (U4120, U5120, U4130, and U5130, schematic 2C, left). The data is put on the data bus either through data lines DØ—D7 (low byte or lines D8—D15 (high byte). If the module is configured for byte mode operation or low byte of word mode, Read Low (RL from Byte/Word Control on schematic 2A) enables the buffers for lines DØ—D7 (U4120 and U5120). Read High (RH) causes data to be placed on the bus through lines D8—D15 (U4130 and U5130) when the module is configured for the high byte of word mode.

When data is read out of the data output registers (U4140 and U5140), its validity is checked by the parity checker (U3140, schematic 2C, right). Even parity denotes valid data. When parity is found to be odd, an error signal is sent from the parity checker to the parity error detector (U2110 schematic 2C, lower right). If there is a parity error, the error detector (U2110) issues a parity interrupt (PARITY INT) signal when the detector is clocked by Parity Strobe (PARITY STR from the Timing Generator, schematic 2A). Parity interrupt signals are received by interrupt decode circuitry (U4170, U5170, schematic 2C, bottom), which sends a Master Interrupt 1 in System Memory operation, or a Master Interrupt 3 in Program Memory operation. The PARITY INT flipflop is reset when the proper I/O vector (address 0002 or 0006) appears on the data bus during a Master Interrupt Acknowledge (INTACK). The I/O decoder output (U3120) and RESET combine to reset the parity error detector (U2110).

Address Control





The Address Control circuitry controls address lines AØ—A15 to accomplish module selection and byte/word shifting, and provides refresh cycle addresses for the 16K Dynamic RAM module. Chip Enable lines CE1—CE4 are generated with this circuitry.

8-BIT OPERATION

In byte mode operation, address lines AØ—A15 have the following functions:

A14 and A15 select the module. (Up to four Program Memory modules may be present

in the μ Processor Lab.)

A12 and A13 select one of the four 4K X 9-bit rows of RAM on the specified module.

AØ and A11 select addresses within the specified 4K X 9-bit row.

Address lines A14 and A15 are sent to a multiplexer (U5100). The multiplexer output is used for module selection in the Module Configuration Logic (schematic 2A, left center).

Address lines A12 and A13 are output from a multiplexer (U1090) as N1 and N2, and are sent to a decode and driver circuit (U1100, U1120, and U1110) which provides the four Chip Enable signals (CE1—CE4).

For normal byte mode operation, address lines AØ—A11 are taken from the bus to the address inputs of the RAMs.

16-BIT OPERATION

When a 16-bit word-oriented emulator processor is used, two Program Memory modules are required. One module of the pair is configured to store the lower eight bits of the 16-bit word (low byte). The other module is configured to store the upper eight bits (high byte).

The modules are configured as high or low byte by switch S4163-4 of each module (as explained in Table 4-1). The address lines for word mode operation are the same as for byte mode operation. Table 4-3 shows module addressing in word mode.

If memory has been configured for 16-bit word operation, and is then accessed by an 8-bit byte-oriented processor, the modules of the word pair are addressed in alternating fashion (see Table 4-3). Both modules access only the low data byte. Alternation between modules of the word pair is designated by a HI/LO bit enabling either the high-byte module or the low-byte module. For byte-oriented access of a word pair, AØ is used as the HI/LO bit instead of being used as an address bit. To use AØ as the HI/LO bit, all address lines must be shifted down. The shift is performed by the address multiplexers (U1090, U2090, U3090, U4090, and U5090). The shift occurs when the address multiplexer receives the signal combination (WD ACCESS + \overline{WDMEM}) \cdot \overline{RUN}\$ at U2140. A1 becomes ADØ (AØ), A2 becomes AD1 (A1), etc. AØ becomes the HI/LO bit, alternating the addressing between modules. During a front panel access, no address line shift takes place; A15, rather than AØ, is used for high/low byte selection.

Table 4-3 MODULE ADDRESSING IN WORD MODE

| \ \ | 16-Bit Emulator Processor Data | | | 8-Bit Emulator Processor | | | |
|---------------|---------------------------------|---------------------------------|---------------|---------------------------------|----------------|---------------------------------|--|
| | | | | Data | | | |
| | LO Module & HI Module | | 11 | LO Module | | HI Module | |
| | 0 | 15 | o | 7 | 8(0) | 15(7) | |
| A D D R E S S | 00 00 00 | 000 001 002 003 004 | 00 00 9 | 000 002 004 006 008 | 00 00 00 | 001 003 005 007 009 | |

SIX-BIT REFRESH ADDRESS MULTIPLEXER (2B)



The RAMs must be refreshed sufficiently often to keep stored data valid. One row address of each individual RAM device must be refreshed every 31.25 µs; all six row addresses must be refreshed within a 2 ms period. The Refresh Request logic insures that sufficient refresh cycles occur. A six-bit refresh multiplexer, consisting of U3090, U4090, and U5090, accesses the six row addresses of the RAM devices to refresh them. During the refresh cycle, normal address lines to the RAMs are inhibited. Figure 4-1 shows Refresh timing relationships.

Refresh Request Logic (A)





When refresh begins, REF OP (from Refresh Request Logic, schematic 2A) strobes U1090 and U2090; this inhibits addresses A6—A11. The six-bit Refresh Address Multiplexer (schematic 2B) is shifted by SYS OP to provide addresses from the Refresh Address Counter (U3100 and U4100). The refresh counter increments after each refresh cycle to assure that all rows have been addressed within a 2 ms period. All four Chip Enable lines, CE1—CE4, are activated when the Chip Enable driver (U1110) is reset by SYS OP.

SYSTEM MODE REFRESH REQUEST

Every 26 μ s, the I/O CLOCK rising edge clocks the Refresh Pending flip-flop (U3160B). The falling edge of I/O CLOCK triggers the 20 μ s Refresh one-shot multivibrator (U3170). The falling edge of the following OPREQ causes the Refresh Request flip-flop (U3160A) to issue the refresh request to the Operation Control logic. When the present memory cycle is finished, the Operation Control flip-flop (U2170A) is clocked, issuing REF OP to activate RAM refresh. If OPREQ does not occur within 20 μ s of the I/O CLOCK, the 20 μ s one-shot will unconditionally cause a refresh request and begin the RAM refresh cycle.

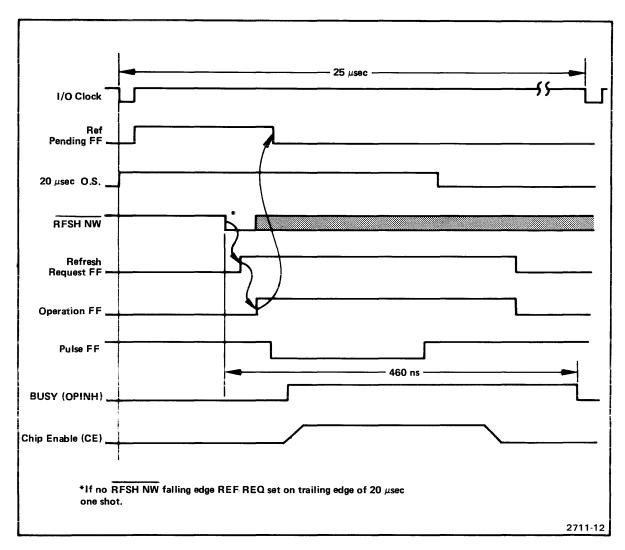


Fig. 4-1. 16K Dynamic RAM Refresh Operation.

PROGRAM MODE REFRESH REQUEST

@

For Program Memory modules, the rising edge of I/O CLOCK sets the Refresh Pending flip-flop (U3160B), and the falling edge of I/O CLOCK triggers the 20 μ s Refresh one-shot multivibrator (U3170). For Program Memory, jumper J11 is disconnected from the refresh request flip-flop (U3160A) and jumper J12 is connected to the clock input (see Table 4-1). J12 allows RFSH NW (Refresh Now) to clock the refresh request flip-flop. RFSH NW is a signal from the emulator processor, indicating that the processor will not need the bus and that there is time for a refresh cycle. When RFSH NW occurs, a refresh request is sent to the Operation Control circuitry. As soon as the present memory cycle is finished, the Operation Control logic clocks the Operation Control flip-flop (U2170A), causing REF OP to activate chip refresh. If RFSH NW does not occur within 20 μ s of I/O CLOCK, the 20 μ s one-shot will unconditionally cause a refresh request. The refresh will begin as soon as the present memory cycle is completed. Refresh is not seen by the emulator or by the System Processor.

Operation Control and Timing Generator





The Operation Control circuitry receives system access requests and refresh requests, resolves contention between these requests, and generates all timing signals for write, read, and refresh operations.

Operation Control receives system and refresh requests through U2160. Because of the importance of refresh, a refresh request has priority over a system request, and therefore controls the state of the operation control flip-flop (U2170).

Read, Write, and Refresh timing signals are created by the Timing Generator circuitry. When the Operation Control logic accepts a system or refresh request, it sets the AD STR flip-flop (U1160); this sends a low-going signal down the 200 ns delay line (DL1140). At the end of the 200 ns delay, the low-going signal resets the AD STR flip-flop, and a positive-going signal is sent down the delay line. In this way, the 400 ns required for the memory cycle is derived. The timing pulses for Read, Write, and Refresh operations are taken from taps along the delay line, through logic gates, and through a multiplexer (U2130) which provides the required timing. The Write flip-flop (U2170B) controls the multiplexer to provide either Write or Read timing. During refresh, timing signals are inhibited by applying REF OP to the gating input of the multiplexer.

The following paragraphs explain the activities of the Operation Control logic in Read, Write, and Refresh modes.

READ

Figure 4-2 shows the memory Read timing relationships.

When the module is selected, a System Pending signal will be produced when the next OPREQ clocks the System Pending flip-flop (U2150B). System Pending allows HOLD to be produced.

The System Pending flip-flop (U2150) directly resets the System Request flip-flop (U2110). U2110 immediately issues a System Request signal to the Operation Control logic. Unless a refresh is pending, the system request is gated through to clock the Write (U2170B) and Operation (REF OP, U2170A) flip-flops. Bus line R/W instructs the Write flip-flop to set the timing multiplexer (U2130) to select Read operation outputs when clocked. The system request also sets the AD STR flip-flop (U1160). After an 80 ns delay, the Chip Enable flip-flop (U2150A) is clocked to output $\overline{\text{CE}}$ for 240 ns. Memory data is sampled (RDSTR) and HOLD is reset 220 ns into the cycle; this tells the system that data is valid.

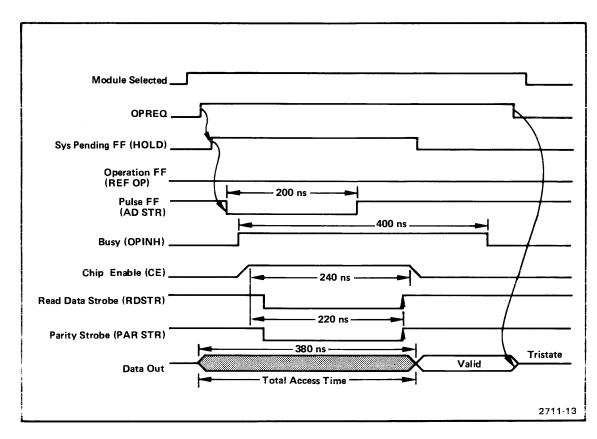


Fig. 4-2. 16K Dynamic RAM Memory Read Operation.

WRITE

Figure 4-3 shows the memory Write timing relationships.

In the Write mode, OPREQ clocks the System Pending flip-flop (U2150B); this allows \overline{HOLD} to be generated. Although the Write command is on the bus (R/\overline{W}) , no system request is issued until \overline{WRP} is received, indicating valid data. When \overline{WRP} is received, the System Request flip-flop (U2110) is set, producing a system request. The system request will clock the Write and Operation (REF OP) flip-flops. Bus line R/W provides the conditions for the Write flip-flop (U2170B) to output a Write signal. The Write signal from the Write flip-flop will instruct the timing multiplexer to select the Write operation outputs.

System Request also sets the AD STR flip-flop (U1160), thus starting the timing sequence. Chip Enable is generated and data is sampled (WD STR) 40 ns into the cycle. Write Enable is generated 80 ns into the cycle. Because the write data is stored and the memory chips store the address, the HOLD signal is reset early in the cycle, allowing the processor to proceed.

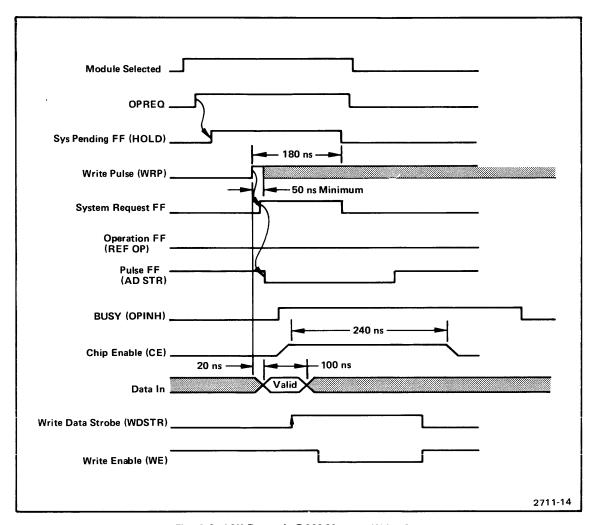


Fig. 4-3. 16K Dynamic RAM Memory Write Operation.

REFRESH OPERATION

Refer back to Fig. 4-1 for the memory Refresh timing relationships.

A refresh cycle begins when the I/O CLOCK leading edge triggers the 20 μ s Refresh one-shot multivibrator (U3170). The Refresh Pending flip-flop (U3160B) is clocked by the trailing edge of I/O CLOCK, thus generating Refresh Pending. The next RFSH NW (OPREQ for System Memory modules) will clock the Refresh Request flip-flop (U3160A) to produce a refresh request to the operation control. If RFSH NW (Program Memory) or OPREQ (System Memory) does not occur within 20 μ s, the 20 μ s one-shot (U3170) will unconditionally set a Refresh Request. The 20 μ s one-shot insures that a refresh cycle occurs every 26 μ s. As soon as the memory completes its present cycle, the refresh request will set the AD STR flip-flop (U1160), and clock the Operation Control flip-flop (REF OP, U2170A) to output a REF OP. REF OP will inhibit the timing multiplexer (U2130 in the Timing Generator, schematic 2A, right), assuring that no Read or Write timing signals will be output during refresh. REF OP also switches the Address Control to the refresh

address mode and enables all four CE lines. At 320 ns into the 400 ns cycle, the Operation Control (REF OP, U2170A) and Refresh Request (U3160A) flip-flops are reset to allow address set-up time for a system request.

Configuration Logic (2A)





Module Configuration logic designates the standard 16K Dynamic RAM module as either System or Program Memory. In Program Memory mode, Module Configuration logic additionally designates the module address and detects module addressing from the emulator or from the System Processor.

The module is selected as either System or Program Memory by setting two jumpers (J11, J12) and one switch (S4163-3). The two jumpers, J11 and J12, select the clock (OPREQ or RFSH NW) for the Refresh Request flip-flop. (See Table 4-1.)

When the System/Program switch (S4163-3) is in the System position (open), the Bootstrap PROM circuit is enabled. The PROM Access one-shot (U3170), triggered by OPREQ, is activated by the System/Program switch to produce PROM CS.

In Program Memory, up to four memory modules may be used. Each module is given an individual address by the programming switches S4163-1 and S4163-2. S4163-1 and S4163-2 allow A14 and A15 to control the enabling of the four memory modules. (See Tables 4-1 and 4-2).

Byte/Word Control





Byte/Word Control circuitry is used to configure the modules for either byte-oriented or wordoriented emulator processors. Byte/Word Control circuitry controls the address line shift, data line selection, and HI/LO byte module selection.

To set up the module for word-oriented emulators, jumper J9 is installed. The HI/LO switch (\$4163-4) designates the module as high or low byte of word pair.

Data bus buffers are selected and enabled by the data buffer control (U1120B). When bus line WD ACCESS goes low, signalling access by a word-oriented emulator, the high-byte module data bus buffers (D8—D15) will be enabled by \overline{WH} or RH, depending on whether bus line R/ \overline{W} signals a Read or Write operation. The low-byte module data bus buffers (DØ—D7) are enabled by WH or RL. These enabling signals are the inverted result of the data buffer control (U1120) outputs \overline{WH} , RH, and RL.

System bus line R/W enables the data bus control to output either Read enables or Write enables. In word mode, WD ACCESS and the HI/LO switch determine if the control will enable high or low byte buffers. Only RL and WH are generated for byte mode operation. RH and WH are generated only during word mode to enable the high-byte buffers. During some operations, both the read and write buffers will be enabled at the same time.

In word mode, when a word pair is accessed by a byte-oriented emulator, WD ACCESS will not be present, indicating byte access. Only one module of the word pair will be accessed at a time, in alternating fashion as shown in Table 4-3.

9900 WORD MODE HARDWARE MODIFICATION

This hardware modification is only to be performed on those memory modules to be used in word mode with the 9900 Emulator Processor. Once the modules have been modified, byte-oriented processors can still be used, provided both memory modules are used together. In that case, the modified modules are accessed by reading from or writing to each one alternately.

Refer to Fig. 4-4 for the locations of the following runs.

Modification Procedure:

- 1. Cut runs to pins 1 and 2 of U5150.
- 2. Cut run to pin 12 of U4170.
- 3. Cut jumper J10 (located between U5150 and U5160).
- 4. Connect jumper between pins 2 and 4 of U5150.
- 5. Connect jumper between pin 1 of U5150 and pin P1-80.
- 6. Connect jumper between pin 3 of U5150 and pin 12 of U4170.
- 7. Connect a 560-ohm resistor between pins 3 and 14 of U5150.

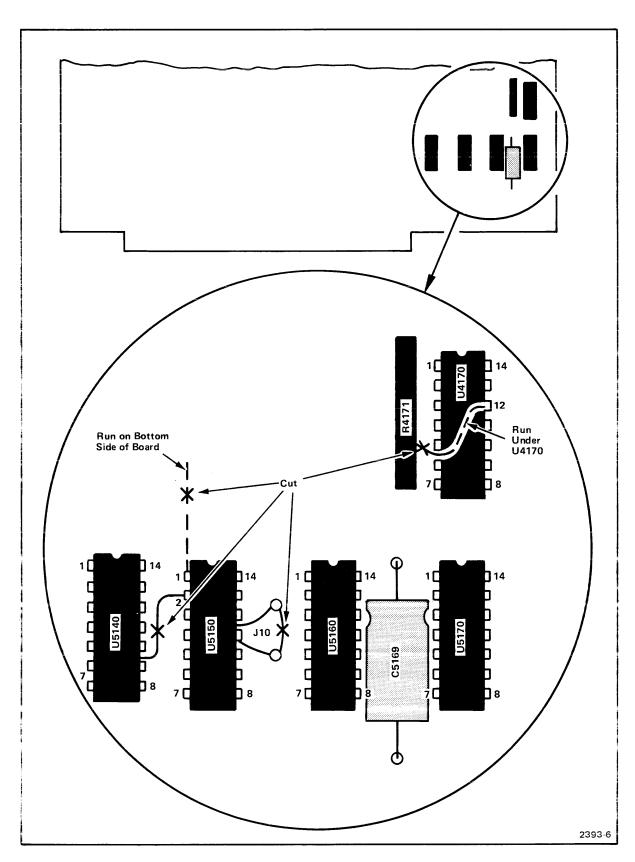


Fig. 4-4. Program Memory—9900 Word Mode Modification.

Section 5

SYSTEM COMMUNICATIONS

INTRODUCTION

The System Communications module provides two services to the 8001/8002A μ Processor Labs: external RS-232-C I/O communications, and Memory Mapping.

Three external I/O ports are controlled by the System Communications module. Each I/O port is connected to an RS-232-C compatible connector on the rear panel of the μ Processor Lab. Each port also has a specific device assignment. Table 5-1 shows a list of the connectors and their assignments. For a more complete description of the RS-232-C connectors, see the 8001/8002A μ Processor Lab Installation Guide.

Table 5-1

JACK AND DEVICE ASSIGNMENTS

| Jack Number | Input Device | Output Device | Device Description |
|----------------|-----------------|------------------|-------------------------|
| J101 | REMI* | REMO* | Communications Modem |
| J102 | | LPT1* | Line Printer |
| J103 | PPTR* | PPTP* | Paper Tape Reader/Punch |

Memory mapping allows the user to define active address space as being either in Program Memory (within the μ Processor Lab), or prototype memory, or some combination of the two.

For our discussion, the System Communications module can be divided into three functional elements:

- System I/O functions
- External I/O functions
- Memory Mapping functions

Refer to the schematic diagrams at the back of this manual while reading the following text.

SYSTEM I/O FUNCTIONS

Recall that each module in the μ Processor Lab is controlled by the System Processor module. The System I/O functions allow the System Processor to control the operation of the System Communications module.

The following circuitry is involved in the System I/O functions:

- I/O Decoder Logic
- Address Bus Buffer
- Control Bus Buffer

I/O Decoder Logic



The I/O Decoder logic allows the System Communications module to be accessed through its system I/O ports by the System Processor module. The System Communications module is assigned I/O addresses FO—FF, although only F9—FF are used. See Tables 5-2 and 5-3.

Table 5-2

I/O DECODER ENABLE CHART

| Inputs | | Cor | System ntrol Bus L | ines | | | | System ess Bus Li | nes | |
|----------------------|-----|-----|-----------------------|------|--------|------------|-------------|----------------------|-----|----|
| | | | | | I/O De | coder Logi | ic Enabling | Inputs | | |
| Outputs | WRP | R/W | MSTR RUN | M/IO | OPREQ | Ā13 | Ā7 | Ā6 | Ā5 | Ā4 |
| Select 0 | ж | x | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 1 |
| Emulator Run 1 | x | x | 1 | 0 | x | x | x | × | × | x |
| WRP 1 | 0 | × | x | x | x | х | x | x | x | x |
| R̄/W 0/1 | × | 1/0 | x | x | x | x | х | x | x | x |

x: don't care

1: high

0: low

The logic shown for the outputs is the enable state

The I/O Decoder is basically a large AND gate (see schematic 3A, left center). When all the inputs of U3040 are high, the output goes low, indicating that the System Communications module has been selected by the System Processor for operation.

All the inputs to U3040 are constantly enabled from the μ Processor Lab bus. A4—A7 indicate the I/O address range being selected (F9—FF) by the System Processor. A13 is another address range indicator generated by the System Processor. The control lines (OPERQ, \overline{M} /IO, and MSTR RUN) allow the System Communications module to be sure that the System Processor is running, and performing an I/O operation.

When low, the SELECT output of U3040 indicates that the System Communications module has been activated by the System Processor. SELECT is used in both the External I/O functions and the Memory Mapping functions of the System Communications module. The Memory Mapping functions are explained later in this section.

When high, the output of U2060 in the I/O Decoder logic indicates that an I/O operation is not in progress and that the Memory Mapping function can be used by an emulator processor.

Table 5-3 I/O DECODER LOGIC

| I/O PORT ENABLE | | | LOW | ER ORDER | ADDRESS B | BITS |
|-----------------|--------------|---|-----|----------|-----------|------|
| I/O Address | Output | Function | Ā0 | ĀĪ | Ā2 | Ā3 |
| FA,FB | PS1 0 | Modem ACIA | x | 0 | 1 | 0 |
| FC,FD | PS2 0 | Line Printer ACIA | x | 1 | 0 | 0 |
| FE,FF | PS3 0 | Paper Tape Reader/ Punch ACIA | x | 0 | 0 | 0 |
| F9 | MEM MAP 0 | Memory Map | 0 | 1 | 1 | 0 |

Address Bus Buffers 3A



The Address Bus Buffers (U4040, U3050) control the admission of address lines A6—A15 from the μ Processor Lab address bus to the System Communications module internal address bus. A6, A7, and A13 are constantly enabled. A8—A12, A14, and A15 are enabled only when the System Communications module is performing a Memory Mapping function. Memory Mapping is discussed in detail later in this section.

Control Bus Buffers 3A |



The Control Bus Buffers (U4070 and U4080) are constantly enabled. Their outputs are used in both the I/O Decoder logic and the Memory Mapping Control logic.

(a)

EXTERNAL I/O FUNCTIONS

The External I/O functions control information flow between the System Communication module's three external I/O ports and the rest of the µProcessor Lab. Basically, external I/O communications are handled by three Asynchronous Communication Interface Adapter (ACIA) devices and their control logic. For this discussion, the External I/O functions will be divided into these major segments:

- I/O Port Decoder
- Bidirectional Bus Control Logic
- Bidirectional Bus Drivers
- Baud Rate Logic
- Baud Select Logic
- ACIAs
- ACIA Read/Write Clock

I/O Port Decoder 3B



U2040 within the I/O Port Decoder logic is used in conjunction with the Memory Map Control logic (schematic 3A, center). Recall that when the System Processor accesses internal I/O addresses FO-FF (see Table 5-2), the I/O Decoder logic (U3040, schematic 3A) asserts the SELECT line. If the Internal I/O address accessed is F9, U2040 comes into use. F9 is the internal I/O address that indicates a Memory Map operation. $\overline{A0}$ — $\overline{A3}$ are constantly enabled from the μ Processor Lab bus. When the bit pattern of $\overline{A0}$ — $\overline{A3}$ indicates a hexadecimal 9, U2040 generates the MEM MAP signal. MEM MAP is used in combination with SELECT to enable the Memory Mapping function. Table 5-2 illustrates the bit pattern for an access to F9 through FF.

U2030 is a BCD-to-decimal converter. Its function is to select one of the ACIA devices for operation. Depending upon the bit pattern of $\overline{A1} - \overline{A3}$, either $\overline{PS1}$, $\overline{PS2}$, or $\overline{PS3}$ will be asserted, enabling the port 1 ACIA (U2100), the port 2 ACIA (U2120), or the port 3 ACIA (U2130).

U2030 and U3060 detect any access to ports FA-FF. As can be seen in Table 5-2, each ACIA device has its own set of internal I/O addresses. Any I/O access to ports FA-FF will result in one of the three ACIAs being enabled.

To summarize, the I/O Port Decoder tells the rest of the System Communications module when one of the ACIAs is being accessed by the System Processor or when Memory Mapping operations have been selected.

Bidirectional Bus Control Logic 3B



The Bidirectional Bus Control logic directs data either from the μ Processor Lab data bus to the ACIAs, or vice versa. The NORed combination of PS1—PS3 and MEM MAP at U2040 indicates that one of the external I/O ports is being accessed. The output of U2040 is connected to U2070. When the System Communications module is selected (SELECT is low), and the external I/O ports are being enabled (the output of U2040 is low), the system R/W line controls the direction of data flow through U4050 and U4060 (the Bidirectional Bus Drivers). When R/W is low, data is transferred from the ACIAs to the system data bus. When R/W is high, data is transferred from the system data bus to the ACIAs.

Bidirectional Bus Drivers

The Bidirectional Bus Drivers (U4050, U4060) control the data flow to and from the ACIAs. Active control is provided by the Bidirectional Bus Control logic (see the preceding discussion).

Baud Rate Logic



The baud rate clocks for the ACIA devices are supplied by the Baud Rate Logic. The Baud Rate Logic can supply the following baud rates to the ACIAs:

2400 baud

1200 baud

600 baud

300 baud

110 baud

The Baud Rate Logic is basically a clock divider with five different frequency taps. The ACIA devices on the System Communications module require that the receive and transmit input frequencies (at pins 3 and 4) be 16 times the actual baud frequencies. For example, to produce a baud rate of 2400 baud, the input clock frequency must be 16 times that value, or 38.4 kHz (16 X 2400 = 38,400). A simplified block diagram is shown in Fig. 5-1.

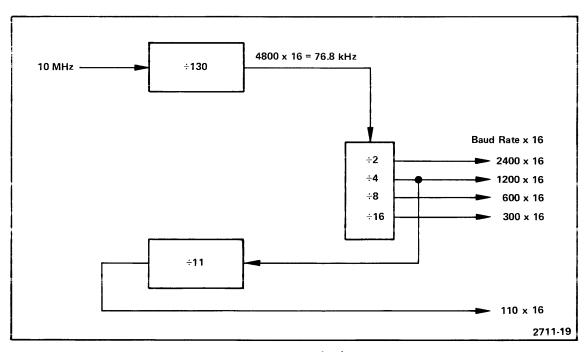


Fig. 5-1. Baud Rate Logic.

The source of the baud clock is the 10 MHz System Clock (SYS CLK) from the μ Processor Lab bus. The 10 MHz clock is fed to a divide-by-130 network (U4110, U4120) to produce a 76.8 kHz clock. The 76.8 kHz clock happens to be 16 times the 2400 baud rate, and therefore is used as the 2400 baud clock.

The 76.8 kHz clock is also fed to an up-down counter (U3130). The up-down counter provides all

the baud clock frequencies, except the 110 baud clock. The 110 baud clock (1.76 kHz) is produced by U4130.

Baud Select Logic 3B

The Baud Select logic is basically a series of wire jumpers that allow the user to select baud rates for each individual ACIA device.

The baud clocks generated by the Baud Rate Logic are fed to one side of a set of wire jumpers. The user can select the transmit and receive baud rates for port 1 (U2100) and for port 2 (U2120). The port 3 transmit and receive clocks are selected individually.

ACIAs 3B

Three Asynchronous Communication Interface Adapter (ACIA) devices are located on the System Communications module. A simplified block diagram of the ACIA is given in Fig. 5-2. All three are RS-232-C compatible; however, each is configured to work with a specific device. The Modem ACIA (U2100) is configured to work best with a modem for telephone data communication. The Line Printer ACIA (U2120) will work best with a line printer. The Paper Tape Reader/Punch ACIA (U2130) works best with a paper tape reader/punch.

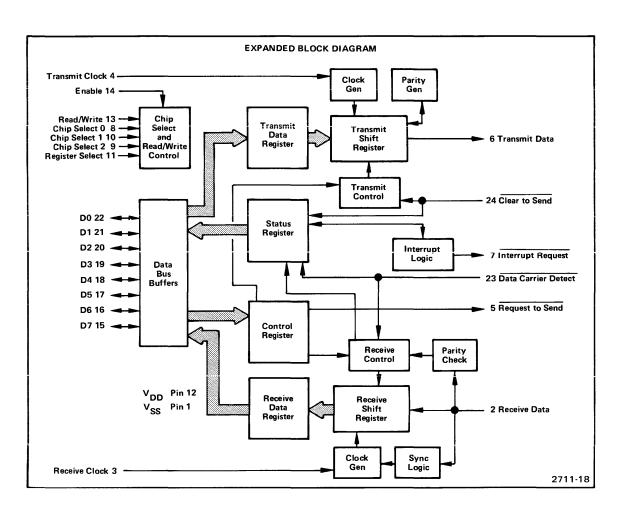


Fig. 5-2. ACIA Block Diagram.

The ACIA can be viewed as a complex parallel-to-serial converter. Each ACIA externally transmits and receives data serially. When data is transmitted, the byte structure is as follows: one start bit, eight data bits, and one stop bit. Any additional stop bits received by the ACIA are ignored, and no parity bits are used. For a detailed description of the ACIA devices, refer to the appropriate manufacturer's literature.

Each ACIA is connected to its own RS-232-C jack at the rear panel of the μ Processor Lab (see Fig. 5-3). Jack J101 is usually connected to a modem. Jacks J102 and J103 can be connected to a line printer and paper tape reader/punch, respectively.

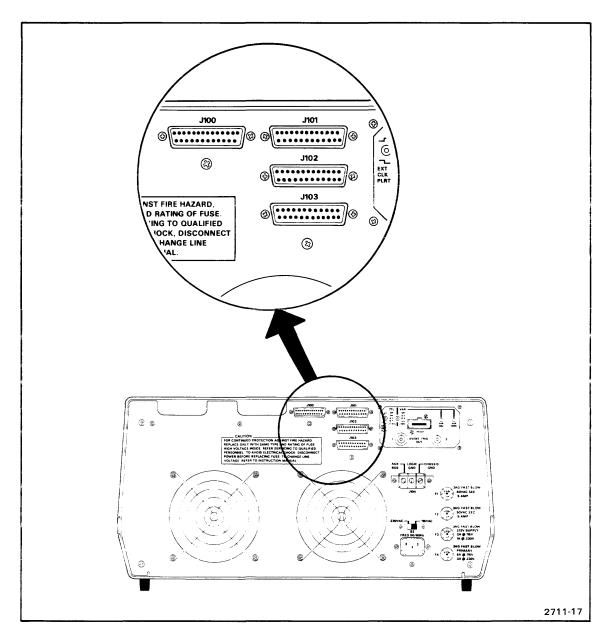


Fig. 5-3. 8001/8002A μProcessor Lab RS-232-C I/O Ports.

Two of the three Chip Select inputs (CSO and CS1) on each ACIA are constantly enabled. The third input (CS2) is used to select one of the ACIAs. Recall that the I/O Port Decoder (schematic 3B, upper left corner) detects when the System Processor is accessing one of the external I/O ports. The outputs of the I/O Port Decoder (PS1, PS2, PS3) indicate which ACIA is being selected. PS1 selects the Modem ACIA, PS2 selects the Line Printer ACIA, and PS3 selects the Paper Tape ACIA.

All three ACIAs are enabled at once by the ACIA Read/Write Clock (discussed later). Read/write control for each ACIA is provided by the R/W control line from the μ Processor Lab bus. When a read is selected by the R/W line, a pair of registers within the ACIA (receive data register and control register) are enabled. However, both registers cannot be used simultaneously. Therefore, the AO line from the system address bus is used to select the proper register. ACIA register addressing is shown in Table 5-4.

Table 5-4
ACIA REGISTER ADDRESSING

| ACIA REGISTER | ACIA | MODEM | LINE PRINTER | PAPERTAPE READER/ PUNCH |
|------------------|------|------------------|------------------|----------------------------|
| I/O PORT | R/W | | | |
| FA | 1 | Status R. | | |
| | 0 | Control R. | | |
| FB | 1 | Receive Data R. | | |
| ГВ | 0 | Transmit Data R. | | |
| FC | 1 | | Status R. | |
| | 0 | | Control R. | |
| FD | 1 | | Receive Data R. | |
| | 0 | | Transmit Data R. | |
| FE | 1 | | | Status R. |
| | 0 | | | Control R. |
| FF | 1 | | | Receive Data R. |
| ., | 0 | | | Transmit Data R. |

| ACIA | Read/ | Write | Clock |
|-------------|-------|-------|-------|
|-------------|-------|-------|-------|

| ^ | | | |
|-------------|---|---|--|
| AB | Г | • | |
| <i>∀</i> 9⁄ | | | |

The ACIA Read/Write Clock circuitry has the responsibility of enabling the ACIAs long enough to ensure that data will remain stable while being written to or read from the μ Processor Lab data bus.

The ACIA Read/Write Clock basically consists of a dual one-shot multivibrator (U3080), and an RS flip-flop (U3070, U2080). U3080B, when triggered, has a pulse width of 120 ns. U3080A, when triggered, has a pulse width of 600 ns. These two pulses satisfy the timing requirements of the ACIAs and the System Processor.

The read/write operations of the ACIA devices will be discussed next, in order to more fully explain the operation of the ACIA Read/Write Clock and the ACIA.

ACIA WRITE

Recall that when the System Processor accesses internal I/O ports F0—FF, the I/O Decoder Logic output SELECT (schematic 3A, left center) goes low. SELECT, in combination with PS1, PS2, or PS3, clocks both one-shots of U3080. At the same time, SELECT resets the RS flip-flop (U3070).

When U3080A is clocked by $\overline{\text{SELECT}}$, its $\overline{\text{Q}}$ output goes low, generating a System Processor $\overline{\text{HOLD}}$. U3080A will maintain $\overline{\text{HOLD}}$ for 600 ns. At the same time the Q output of U3080A is NANDed together at U2080 with the $\overline{\text{Q}}$ output of U3080B. At the end of the 120 ns pulse from U3080B, U2080 generates a pulse that sets the RS flip-flop (U3070). When the RS flip-flop is set (120 ns after $\overline{\text{SELECT}}$ was applied) its output goes high, allowing data to be written into the selected ACIA when the HOLD is removed.

When HOLD is removed (600 ns following SELECT), the System Processor causes the system bus line WRP to go low. The system R/W and WRP lines are NANDed together (U3070, schematic 3A, MEM MAP control logic). The output of U3070 is called WRITE. WRITE resets the RS flip-flop (U2060), ending the ACIA write operation.

ACIA READ

All operations performed in an ACIA write are performed in an ACIA read, with the exception of resetting the RS flip-flop. When an ACIA read operation is completed, SELECT goes high. This action resets the RS flip-flop.

MEMORY MAPPING FUNCTIONS

Memory Mapping involves both Program Memory and the memory in a prototype system. Memory Mapping is used in the manner described below. Refer to Fig. 5-4.

Suppose that a program had been written for a prototype microprocessor-based system and had been stored in the memory of the prototype. Let's assume that a problem was found in the program and that a portion of the program had to be corrected or revised. Memory Mapping allows that portion of the program to reside in Program Memory in the μ Processor Lab. When program execution begins, the prototype will operate out of its own memory until the program area is reached. At that time, execution will switch to Program Memory for the duration of the revised portion of the program, then switch back to prototype memory.

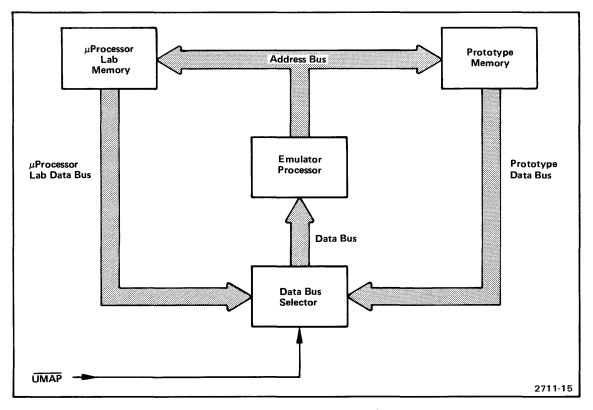


Fig. 5-4, Memory Map Functional Control.

The Memory Mapping functions of the System Communications module permit this switching operation to occur. The Memory Mapping functions can be divided into the following blocks:

- Memory Map
- Memory Map Control Logic
- Memory Map Address Logic

Memory Map



The Memory Map consists of two 256 X 1-bit RAM devices, for a total of 512 bits of storage. The Memory Map is used in the following way: The largest amount of Program or prototype memory allowed by the μ Processor Lab is 64K X 8 bits. Those 64K bytes of addressable space can be divided into 512 blocks of 128 bytes each. Each of the 128-byte blocks can be represented by one bit in the 512-bit Memory Map.

Therefore, one bit in the Memory Map can be used to define each of the 512 blocks as coming from Program Memory or prototoype memory.

On the 16-bit address bus, A7—A15 define the 512 blocks of address space, each containing 128 bytes of memory. Lines A0—A6 define a particular byte within a 128-byte block of address space. For this reason, lines A7—A15 are tied to the address inputs of the Memory Map RAMs. This configuration allows the Memory Map to store one bit defining each 128-byte block. The Memory Map is written to initially by the System Processor to define each block as coming from Program Memory or prototype memory. When the Emulator Processor is executing a program, the Memory Map is constantly being read, supplying the Emulator Processor with the correct memory source for each 128-byte block.

Memory Map Control Logic



Memory Map Control Logic controls the Memory Mapping functions of the System Communications module. When the System Communications module is accessed by the System Processor, the SELECT line from the I/O Decoder Logic goes low. If the internal I/O address accessed by the System Processor is F9, the MEM MAP line (from the I/O Port Decoder on schematic 3B) also goes low. The combination of SELECT and MEM MAP is NANDed together by U2060 to produce MEM MAP SELECT. MEM MAP SELECT is used in several enabling circuits.

For example, when the user enters MAP R on the system terminal, MEM MAP SELECT is NANDed at U3070 with the system bus line R/W. The result is RAM RD. RAM RD enables U4080, allowing the outputs of the Memory Map RAMs to be placed on the system data bus line D0. In this way, the System Processor can display the contents of the Memory Map RAMs.

MEM MAP SELECT is also used to enable the Address Bus Buffers (schematic 3A, upper left). The buffers transfer data from the system address bus onto the Memory Map RAM address bus.

MEM MAP SELECT is also used in the RESET circuitry. RESET is generated by U3060 within the Memory Map Control Logic. When MEM MAP SELECT is high, and the System Processor initiates an internal I/O write to F9, RESET is generated. RESET is used in the Memory Map Address Logic and by the Memory Map RAMs.

Memory Map Address Logic (3A)

Notice on schematic 3A that the Memory Map RAMs can receive addresses from one of two places: from the μ Processor Lab System bus (via the Address Bus Buffer) or from the Memory Map Address Logic. Both the System Processor and the Emulator Processor access the Memory Map RAMs, but in different ways. Figure 5-5 shows Memory Map Address Logic timing.

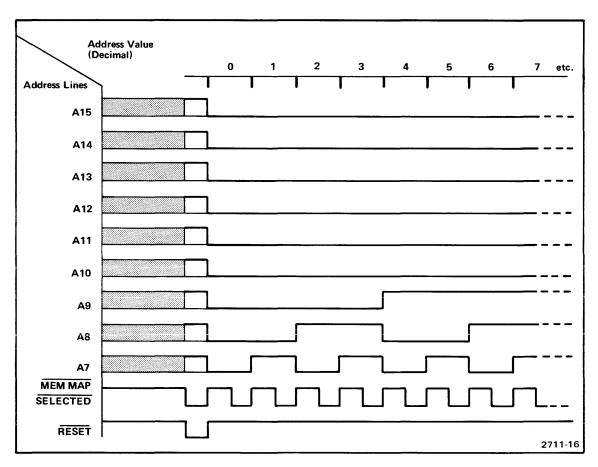


Fig. 5-5. Memory Map Address Logic Timing.

When the System Processor loads the Memory Map into the RAM devices, it starts at RAM addresses 00 and continues to RAM address FF. The actual addressing is not performed by the System Processor, however. The Memory Map Address Logic provides the addresses. The same situation occurs when the System Processor reads the Memory Map. The Memory Map Address Logic sequentially provides the RAM addresses.

Two up-counters provide the addresses. When the System Processor reads or writes to the Memory Map RAMs, it accesses I/O address F9. When F9 is accessed, the RESET line from Memory Map Control Logic is forced low. RESET initializes two up-counters (U4010, U4020). At

the same time as RESET is forced low, MEM MAP SELECT is forced low. Notice that MEM MAP SELECT is inverted, then fed to address bus buffer U3020, and to the UP input of U4020 as COUNT. When the System Processor completes its access to F9, MEM MAP SELECT goes high, clocking the up-counter to the next RAM address to be written to or read. MEM MAP SELECT also enables the address buffer U3020.

When the active Emulator Processor is using the memory map, it provides the address directly through the Address Bus Buffer. When the Emulator Processor is running, the Memory Map RAMs are constantly fed A8—A15 from the system address bus. In this way, the Memory Map RAMs can output the UMAP signal for each address accessed by the Emulator Processor. When low, UMAP tells the Emulator Processor that the current address is to be sent to prototype memory. When UMAP is high, the current address is sent to Program Memory.

5-13

@

Section 6

DEBUG AND FRONT PANEL I/O MODULE

INTRODUCTION

The Debug and Front Panel I/O module performs three distinct functions within the $8001/8002A\,\mu$ Processor Lab: it controls the interaction and system bus time-sharing between the System Processor and emulator processor; it supports software features such as breakpoint, trace, and emulator processor jumps to any memory location; and it provides the interface to either the Standard or Maintenance Front Panel. The Debug module is centrally located in the system bus structure, providing a dividing line between the system and program sections. Unique control lines are connected to the System Processor and emulator processor modules in each section of the bus.

Although the logic sections of the module are interrelated, they are divided here into eight major functional groups:

- System Processor/Emulator Processor Control Logic
- I/O Decoder Logic
- Debug Interrupt Logic
- Service Request Logic
- Address Trace and Compare Logic
- Debug Control Logic
- Forced Jump Logic
- Debug Module Control

For convenience, the Debug and Front Panel I/O module is hereafter referred to as the Debug module.

The Debug module schematic diagrams have been partitioned to block the related circuitry for each of the above functions.

- System Processor/Emulator Processor Control Logic assigns control to either the System Processor or the emulator processor at all times.
- The I/O Decoder Logic consists of I/O port decoding for storing breakpoint values, loading the Debug command and control bytes, and reading the stored program counter address values.
- The Debug Interrupt Logic and Service Request Logic blocks assign interrupt priority and vector-encode eight Service Request interrupts (SVCs) and eight Debug interrupts.
- The Address Trace and Compare Logic and Debug Control Logic blocks allow for storage
 of the emulator processor address value (program counter) during an instruction fetch of
 the last instruction or the present instruction. Also included are two breakpoints storage
 registers with address comparison logic.

- The Forced Jump Logic allows the emulator processor to be started from any memory location.
- The Debug Module Control senses all necessary Maintenance Front Panel and system bus control signals for directing the Debug Module.

CIRCUIT DESCRIPTION

The following circuit descriptions refer to logic blocks as outlined on the schematics.

System Processor/Emulator Processor Control Logic GENERAL



The System Processor/Emulator Processor Control Logic directs which of the two processors is allowed to access the system address, data, and control buses. Since both processors share these bus lines, only one is allowed to run at a time. This type of system is referred to as a Master/Slave arrangement. The System Processor has a higher priority than the emulator processor because it provides control for the μ Processor Lab. For this reason, the System Processor may be referred to as the Master and the emulator processor as the Slave. The System Processor/Emulator Processor Control Logic can be divided into three parts: Master/Slave Control Logic, Master/Slave Status Logic, and Master/Slave Halt Detection.

MASTER/SLAVE CONTROL LOGIC 4B

The Master/Slave Control Logic (MSTR SLV CONTROL) is capable of directly pausing the System Processor and emulator processor. The control logic outputs two signals, Master Pause (MST PSE) and Slave Pause (SLV PAUSE). The two signals are sensed by the System Processor and emulator processor, respectively. When MST PSE or SLV PAUSE is low, the corresponding processor is paused. MST PSE and SLV PAUSE are output from two 4-input AND gates (U3160). When an input to one of these gates is low, the corresponding output is low. Therefore, each processor can be directly paused by any one of four inputs.

One line accessed by both processors is the PAUSE line. The ANDed result of the system bus line PAUSE and the Maintenance Front Panel Bus Control switch ENABLE/NORM causes both processors to be paused. When the Bus Control switch is in the ENABLE position (ACCESS is low) or when PAUSE is low, MST PSE and SLV PAUSE are forced low. Each processor stops running and the corresponding inputs to the system bus are put into a high-impedance tristate mode. The user then has access to the system address, data, and control bus lines.

One input to the SLV PAUSE AND gate (U3160A) is U PAUSE. U PAUSE is an output from the prototype system. When U PAUSE is low, the emulator processor is directly paused. SLV PAUSE is forced low to prevent a System Processor interrupt from occurring. (Refer to the Master/Slave Halt Detection discussion later in this section.) When PAUSE or U PAUSE is discontinued (returns to a high state) or the control switch is returned to the NORM position (ACCESS is high), the previous run state of the processors is resumed.

Another set of inputs sensed by the pause AND gates are the direct pause lines, discussed in the following paragraphs. These inputs, and the last pair of inputs, Q and Q of the Master/Slave Flip-Flop (MSTR/SLV FF), determine which processor is allowed to run.

MASTER/SLAVE STATUS LOGIC 4B



The Master/Slave Status logic ensures that only one of the two processors may run at a time. This logic consists of a J-K flip-flop (U2150) that is continuously clocked by the 38.4 kHz I/O CLK. The MSTR/SLV FF senses inputs from the Maintenance Front Panel (SET SLV, SET MSTR, MSTR CPU TEST, and ACCESS), Master Halt Detector (U2130B), and the system control bus line MSTR INTD.

When the System Processor is interrupted (MSTR INTD is low) or when the Maintenance Front Panel CPU Control switch SYS/PGRM is in the SYS position (SET MSTR is low), the output of a corresponding two-input NAND gate (U1150D) is high. This results in the Master/Slave Control Logic forcing the SLV PAUSE output low and pausing the emulator processor.

When the system control bus line \overline{RUN} goes high, the MSTR/SLV FF is allowed to change states. As long as one of the processors is running, \overline{RUN} is low and the MSTR/SLV FF J and K inputs are held low and high respectively. For this reason, the MSTR/SLV FF cannot change states until both processors are out of the run mode. This guarantees that one processor is not allowed to run until the other processor is off the system bus.

When the SYS/PGRM front panel switch is set in the PGRM position (SET SLV is low), the Master/Slave Control Logic forces the MSTR PSE output low and pauses the System Processor. Again, when the system control bus line RUN is high, the MSTR/SLV FF changes state and the emulator processor is allowed to run.

The normal method for the System Processor to release the system bus and turn control over to the emulator processor is through the execution of a software HALT instruction. The Q output of the MSTR HALT FF (schematic 4B, upper left) is then set high, (This function is discussed in the next topic, Master/Slave Halt Detection.) When MSTR CPU TEST from the front panel is high (switch off), the System Processor is directly paused by forcing MST PSE low. The emulator processor is then put in control and allowed to run, as previously described. However, if MSTR CPU TEST is low, then the MSTR HALT FF Q output is masked. The MSTR/SLV FF is not allowed to change states and turn control over to the emulator processor. Both processors remain paused.

Notice that MSTR CPU TEST and the MSTR HALT FF Q output are NANDed together and result in a low output. This output is used by a NAND gate in the Forced Jump Logic (schematic 4B, upper right) to set output EN ADDR high. This forces the address bus to contain the last address executed and to allow its display by the Maintenance Front Panel.

MASTER/SLAVE HALT DETECTION





The Master/Slave Halt Detection indicates that a software HALT instruction had been executed by the last processor in control of the system bus. The halt detectors sense the system control bus line RUN and the respective MST PSE or SLV PAUSE output from the Master/Slave Control Logic. Operation of the two halt detectors (U2130B, U3150B) is identical. Each consists of two cascaded J-K flip-flops, configured as D-types, which are continuously clocked by the 38.4 kHz I/O CLK. The first FF of each detector senses MST PSE and SLV PAUSE, respectively. The RESET of each FF also senses the same input. The second FF of each detector senses the output of the first FF. The corresponding RESET inputs sense the system control bus line RUN.

When RUN is high, both processors are paused. The halt detectors sense whether MST PSE or SLV PAUSE is high. The corresponding halt detector is set after one I/O CLK cycle if RUN does not return low (indicating that a processor has accessed the system bus). Recall that the MSTR/SLV FF cannot change states unless both processors are out of the run mode. The delay of one I/O CLK cycle allows the MSTR/SLV FF to change states without indicating a software HALT condition.

A System Processor HALT is the normal mechanism for relinquishing the system bus. An emulator HALT indicates a programming error and immediately causes a System Processor interrupt (SLV HLT INT).

I/O Decoder Logic

This section describes both the software and hardware functions of the I/O Decoder logic. The software functions are described first.

GENERAL

The I/O Decoder Logic allows the System Processor to access eight I/O ports. These I/O ports enable various operations that are performed between the System Processor and emulator processor. Tables 6-1A and 6-1B list the I/O port addresses and their respective software functions. The paragraphs following the tables describe each function. The hardware circuit descriptions for this section follow the function descriptions.

6-5

Table 6-1A
DEBUG MODULE OUTPUT
PORTS AND FUNCTIONS

Table 6-1B
DEBUG MODULE INPUT
PORTS AND FUNCTIONS

| I/O PORT OUTPUT | PORT FUNCTION | |
|--------------------|------------------------|--|
| F8 | Command Byte | |
| F9 | Debug Control Byte | |
| FA | Jump Addr. Low Byte | |
| FB | Jump Addr. High Byte | |
| FC | Breakpoint 1 Low Byte | |
| FD | Breakpoint 1 High Byte | |
| FE | Breakpoint 2 Low Byte | |
| FF | Breakpoint 2 High Byte | |

| · | |
|-------------------|--------------------------------|
| I/O PORT INPUT | PORT FUNCTION |
| FC | Program Counter Last Low Byte |
| FD | Program Counter Last High Byte |
| FE | Program Counter Next Low Byte |
| FF | Program Counter Next High Byte |

COMMAND BYTE

@

A command byte is written to port F9 by the System Processor to enable various command options. The command byte consists of five individual command bits and three unused bits. Their format is shown in Fig. 6-1. The function of each bit is described in the following paragraphs.

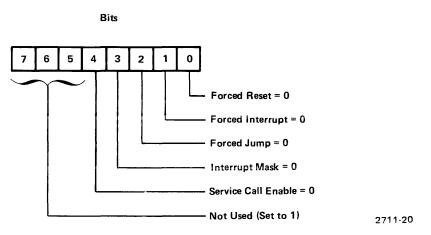


Fig. 6-1. Command Byte Format.

Forced Reset Bit—This bit causes the Debug module to reset the emulator processor. The emulator processor will start instruction execution at address 0000. This bit can be used together with the forced interrupt or forced jump bit.

Forced Interrupt Bit—This bit causes the Debug module to force an emulator processor interrupt. When the emulator processor is restarted, a forced branch instruction to address 0000 is issued.

Forced Jump Bit—This bit forces the emulator processor to branch unconditionally to the address contained in the Forced Jump Address Register located in the Address Trace and Compare Logic (schematic 4C). The register must be set before this bit is issued.

Interrupt Mask Bit—This bit prevents any Debug hardware interrupt from occurring. The masked interrupts are allowed to stack and occur when the mask bit is reset.

Service Calls Enable Bit—This bit allows the emulator processor to obtain input/output (I/O) service from the system peripherals, including the system terminal and flexible disc drives.

DEBUG CONTROL BYTE

The System Processor writes a control byte to port F8. This control byte enables the Debug mode and controls Single Cycle and Breakpoint operation. The control byte uses six individual bits. Figure 6-2 illustrates the bit format. These bits are non-exclusive; any combination may be used. Bits 0—3 correspond to Breakpoint control. Bits 0 and 2 enable Breakpoints 1 and 2, respectively, during an emulator read cycle. Bits 1 and 3 enable Breakpoints 1 and 2, respectively, during an emulator write cycle. Bit 4 enables the Single Cycle operation during the TRACE ALL command. Bit 5 enables the Debug sequence and thus allows Breakpoint and Single Cycle operation. The Debug control byte is examined in further detail in the Address Trace and Compare Logic discussion later in this section.

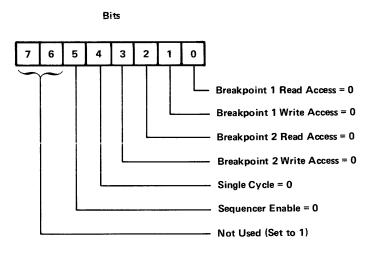


Fig. 6-2. Debug Control Byte Format.

JUMP ADDRESS BYTES

The low and high bytes of a forced jump address are loaded through output ports FA and FB and into the Forced Jump Address Register in the Address Trace and Compare Logic (schematic 4C). The forced jump address may be loaded to execute a "GO" command from the user or to jump the emulator processor to or from a trace routine.

6-6

BREAKPOINT BYTES

I/O port output addresses FC and FD are the addresses for Breakpoint 1 Low Byte and Breakpoint 1 High Byte, respectively.

I/O port output addresses FE and FF are the addresses for Breakpoint 2 Low Byte and Breakpoint 2 High Byte, respectively.

PROGRAM COUNTER

Input port pairs FC, FD and FE, FF correspond, respectively, to the emulator processor program counter values of the 'last' instruction executed and of the 'next' instruction to be executed. These ports are read only during trace or after detecting a breakpoint.

CIRCUIT DESCRIPTION





The I/O Decoder Logic generates an output, SELECT, that is low when any of the ports FO—FF are accessed by either the System Processor or emulator processor. Table 6-2 shows the system address and control bus lines that enable SELECT. Control line OPREQ is low when the system address and data buses are valid and can be read. Address line A13 and control line \overline{M}/IO are high during the execution of an I/O instruction. The address lines A4—A7 correspond to I/O ports FO—FF.

Table 6-2 I/O DECODER LOGIC

| Inputs | System Control Bus Lines | | | System Address Bus Lines | | | | |
|-------------|-----------------------------|------------------------------|-------|-----------------------------|----|----|------------|----|
| Outputs | OPREQ | OPREQ' (Same as OPREQ) | м̄∕ıо | A13 | А7 | A6 | A 5 | A4 |
| SELECT 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

1: high

0: low

The logic shown for the outputs is the enable state

Two other inputs to the I/O Decoder Logic are MSTR and system address line A3. The MSTR input is the Q output of the MSTR/SLV FF (U2150A) in the Master/Slave Status logic (schematic 4B, lower center). The MSTR line is high when the System Processor has control of the system bus. MSTR and address bit A3 are NANDed together (U1160D) to form an output which is NORed with SELECT. SELECT is low and inputs MSTR and A3 are high when I/O ports F8—FF are addressed by the System Processor. The NAND result of MSTR and A3 is low, and is NORed (U1100C) with SELECT to produce a high output, Ports Enabled (PRTEN). This output corresponds to the System Processor access of I/O ports F8—FF, and is used to enable all functions related to the decoding of these I/O ports F8—FF.

System Processor output ports F9, FA, and FB are decoded by a binary-decimal decoder (U4010). Address lines A0, A1, and A2 are sensed by the decoder, along with the NANDed result of PRTEN and \overline{WRP} . The output of U3100B is used to enable the decoder. PRTEN is gated by the system control bus line R/\overline{W} in the write mode (when R/\overline{W} is low), and by the \overline{WRP} line. \overline{WRP} is a high-low-high timing pulse initiated by the System Processor or emulator processor during a write operation, and is used for clocking output latches and memory.

When PRTEN and WRP are high and low, respectively, the binary-to-decimal decoder is enabled. Since this decoder is enabled when I/O ports F9—FB are addressed, address bits A0—A2 represent the ports that are accessed. The decoder output line (1, 2, 3, or 4) that corresponds to the binary value of bits A0—A2 is low during the period WRP is low. The appropriate output is then used to strobe a register or flip-flop to latch the corresponding data bits.

WRITE BREAKPOINT

The Breakpoint Storage Register File is enabled when the System Processor output ports FC—FF are decoded into a write breakpoint strobe (WRT BP from U3110, pin 6). The Breakpoint Storage Register File is located in Address Trace and Compare Logic (schematic 4C, lower center). There are four registers in this file, which store the high and low address bytes of the two breakpoints. System address lines A0 and A1 address the file containing the register that corresponds to the output ports of the selected breakpoint (see Table 6-1). WRT BP is the NANDed result of PRTEN, address line A2, and system control bus lines R/W and WRP. When R/W and WRP are low, and PRTEN and address A2 are high, WRT BP is low and the file register is enabled into the Write mode.

I/O READ

System Processor input ports FC—FF are decoded into an input, I/O READ (from U3110B). This output enables the Program Counter Storage Register File (U3050) in the Address Trace and Compare Logic (U3050, schematic 4C, lower left). There are four registers in this file, which store the high and low address bytes of PC-Next and PC-Last. Address lines A0 and A1 address the file containing the register that corresponds to the input ports of the selected Program Counter (see Table 6-2). I/O READ is the NANDed result of PRTEN, address bit A2, and the system control bus line R/W. When R/W, PRTEN and address line A2 are high, I/O READ is low and the file register is enabled into the read mode.

I/O WRITE

The NANDed result of PRTEN and the system control bus line R/\overline{W} is presented as an output, $\overline{I/O}$ WRITE (from U3100D). $\overline{I/O}$ WRITE and $\overline{I/O}$ READ control the input/output mode of the Driver/Receiver Buffer in the Address Trace and Compare Logic (schematic 4C). $\overline{I/O}$ WRITE and $\overline{I/O}$ READ gate the data to and from the two file registers.

Interrupt Logic





The Debug Module services up to 16 interrupts. For purposes of this discussion, these interrupts are divided into two groups. The first group of eight are Service Request interrupts (SVCs) serviced for the System Processor module. The second group of eight are debugging and Real-Time Prototype Analyzer (RTPA) interrupts. They are discussed later in this section.

The Debug Module assigns priorities to each of the 16 interrupts. First, all System Processor SVC interrupts have priority over debugging and RTPA interrupts. The priority setting circuitry will allow debugging or RTPA interrupts only if no SVCs are pending. Additionally, each set of interrupts (either SVCs or debugging) has internal priorities.

In the descriptions below, functional descriptions precede the hardware discussions.

SVC INTERRUPT LOGIC

One of the functions of the System Processor is to provide all input/output requirements for the emulator processor. The emulator processor has no provision for direct access to peripheral equipment, such as the system console. Therefore, the emulator processor requests access from the System Processor.

The emulator processor notifies the System Processor of the request by issuing a service call (SVC).

The SVC is a two-byte address included in the users software program. Six SVCs may be defined in the users software program.

As shown in Table 6-3, two of the eight SVCs are reserved for debugging operations, including dump and restore routines.

The SVC is a two-byte address. Table 6-3 illustrates the SVC format and priorities for the eight SVCs. The XX portion of the I/O address varies with the individual emulator processor.

Table 6-3
SVC FORMAT AND PRIORITIES

| | svc | Interrupt Priority | Vector Address | I/O Address |
|---------|-----|--------------------|----------------|-------------|
| / | , 1 | 16 | 0020 | XXF7 |
| | 2 | 17 | 0022 | XXF6 |
| User | 3 | 18 | 0024 | ~ XXF5 |
| Oser | 4 | 19 | 0026 | XXF4 |
| | 5 | 20 | 0028 | XXF3 |
| (| 6 | 21 | 002A | XXF2 |
| Dobug | 7 | 22 | 002C | XXF1 |
| Debug { | 8 | 23 | 002E | XXF0 |

SVC HARDWARE BLOCK DESCRIPTION

The SVC logic can be divided into two sections: EMULATOR/DEBUG SVC logic and Debug INTERRUPT logic.

EMULATOR/DEBUG SVC LOGIC

The EMULATOR/DEBUG SVC logic is asserted when the emulator processor accesses I/O ports F6 or F7. The output of the EMULATOR/DEBUG SVC logic is a line called SPRTEN (from U1160A). SPRTEN is low when the emulator processor is executing an SVC instruction.

SPRTEN has two functions: to assert the Debug Interrupt Request (DBG INT) signal, which is placed on the system bus; and to act as a clock input for the SVC Vector Latch (U2090).

The SVC vector latch uses address bits A0—A2 from the system address bus as inputs. When both SPRTEN and the Debug Vector Enable (DBG VEN) line are asserted, the interrupting vector is transferred from A0—A2 to the internal vector address bus Q1—Q6 (in the Debug Interrupt Logic). The actual interrupt vector will be found on Q1, Q2, and Q6 (inputs to U2080A, U2080B, and U2080D). The Q5 output of the SVC vector latch is used to disable the interrupt priority encoder. The reason this is necessary will be explained later.

DEBUG INTERRUPT LOGIC 4D



In addition to SVCs, the Debug module services eight interrupts that may be generated while debugging a software routine, or while using the Real-Time Prototype Analyzer. Notice in schematic 4D (bottom) that eight J-K flip-flops have their Q outputs tied to the input of a priority encoder (U2100). Each of these flip-flops corresponds to one of the eight interrupts. The six Debugging interrupt flip-flops are:

- Breakpoint 1-U2120A
- Breakpoint 2—U2120B
- Single Cycle Interrupt—U2110A
- Emulator Halt (SLV HLT INT)—U2110B
- Diagnostic Interrupt—U2140B
- Front Panel Halt—U4150B

The two RTPA interrupt flip-flops are U1080A and U1080B.

A complete listing of interrupt vectors and interrupt priorities is given in Appendix C.

When one of these flip-flops detects an interrupt, its \overline{Q} output is set low. The priority encoder looks at all eight flip-flops simultaneoulsy. When more than one flip-flop is set by interrupts, the priority encoder outputs the vector for the interrupt having the highest priority.

Recall from the previous discussion that the Q5 output of the SVC Vector Latch (U2090) disables the priority encoder (U2100). Notice that the SVC Vector Latch outputs and the priority encoder outputs are both tied to the inputs of three NAND gates (U2080). When an SVC interrupt occurs, Q5 of U2090 goes high, forcing the priority encoder El input high. This in turn causes the priority encoder to force its outputs high. This action allows the vector from the SVC Vector Latch (U2090) to be placed on the system data bus.

If no SVC interrupts are present, the priority encoder El input is low, allowing the debug or RTPA interrupt vector onto the data bus.

Address Trace and Compare Logic 4C BREAKPOINT/PROGRAM COUNTER REGISTERS

The Debug module internal 8-bit bus is connected to two register files: one register file stores breakpoint addresses, while the other register file stores program counter values. Each file stores two 16-bit words.

BREAKPOINT REGISTERS

The Breakpoint Register File is used during breakpoint operations. A breakpoint 1 address and a breakpoint 2 address are stored in the breakpoint register by the System Processor. Access to these registers is controlled by the I/O Decoder Logic (schematic 4D, upper center and right). As the user program is executed, each current address is compared with the stored breakpoint address. If an address match occurs, the emulator processor is halted.

PROGRAM COUNTER REGISTERS

The program counter register is used concurrently with the breakpoint register. As each new address is compared with the preset breakpoint address, the new address is stored in the program counter register. The address is stored in the event that a breakpoint is reached. In that case, the current program location must be saved so that program execution may continue following the break.

The Program Counter Storage Registers (U2050, U3050) contain the addresses of both the last instruction executed (P.C. Last) and the next instruction to be executed (P.C. Next). When the System Processor is interrupted, P.C. Last contains the address of the instruction that was just completed, and P.C. Next contains the address of the instruction to which emulator processor must return.

The P.C. Last Register is normally written into during an instruction FETCH when a System Processor interrupt is not pending. During an instruction at which a breakpoint occurs, a P.C. Last is written into during the instruction fetch before the breakpoint occurs. The P.C. Next Register is written into on the subsequent cycles of the next instruction.

BUS SEQUENCER





Notice Figures 6-3A and 6-3B represent the sequence of events that occur during breakpoint comparison and program counter storage. The Bus Sequencer controls the timing of this sequence.

The Bus Sequencer is made up of four J-K flip-flops (U5100, U5110, schematic 4C, center). These flip-flops generate the basic timing sequence. The following description presents an overview of the major bus sequence states.

When the debug mode of operation is enabled, the Debug Control Byte register (U3020) output Q3 is high. This output, labeled TR, in combination with the Debug module Master/Slave circuitry (schematic 4B), enables the Bus Sequencer. (Trace Enable block, schematic 4C, upper left.) The Bus Sequencer is triggered by the leading edge of OPREQ.

During time state 1, as shown in Fig. 6-3A, the low-order byte of the system address bus is clocked onto the Debug module internal bus. This value is stored in the Program Counter Storage Registers (U2050, U3050, schematic 4C, center). At the same time, the previously stored low-order Breakpoint 1 address byte is read from its storage register (U2030, U3030 schematic 4C, center) and compared with the byte from the system address bus. The address comparator is made up of a series of exclusive-OR devices (U2040, U3040 schematic 4C, center). If the comparison is true, the result of the comparison is clocked into the first stage of a compare circuit (U4090).

During time state 2, the high-order address byte is latched onto the internal bus and written into the Program Counter Storage Registers (U2030, U3030, U2050, U3050). Concurrently, the high-order byte is compared with the upper order byte of the previously stored Breakpoint 1 address. The result of that comparison (if true) is also clocked into the compare flip-flop (U4090).

In time state 3, as shown in Fig. 6-3B, the result of the comparison is clocked into the Mask Debug Interrupt logic (schematic 4C, upper right). At the same time, the Program Counter storage and compare operation is repeated for the low-order byte of Breakpoint 2.

In time state 4, the high-order bytes are compared for Breakpoint 2.

In time state 5, the result of the Breakpoint 2 comparison is gated to the interrupt circuitry.

Time state 6 represents the reset state that stops the sequencer.

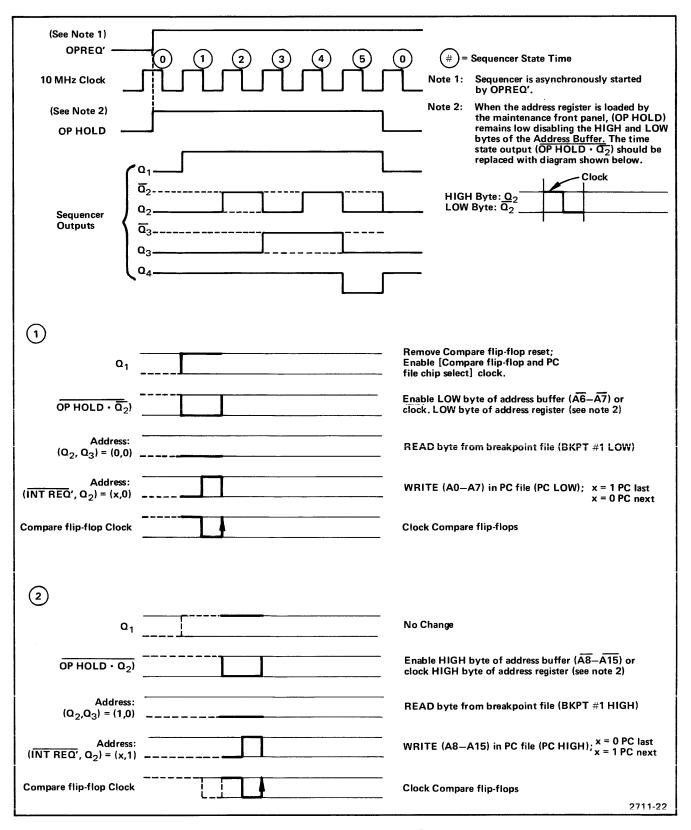


Fig. 6-3A. Sequencer State Timing Diagram.

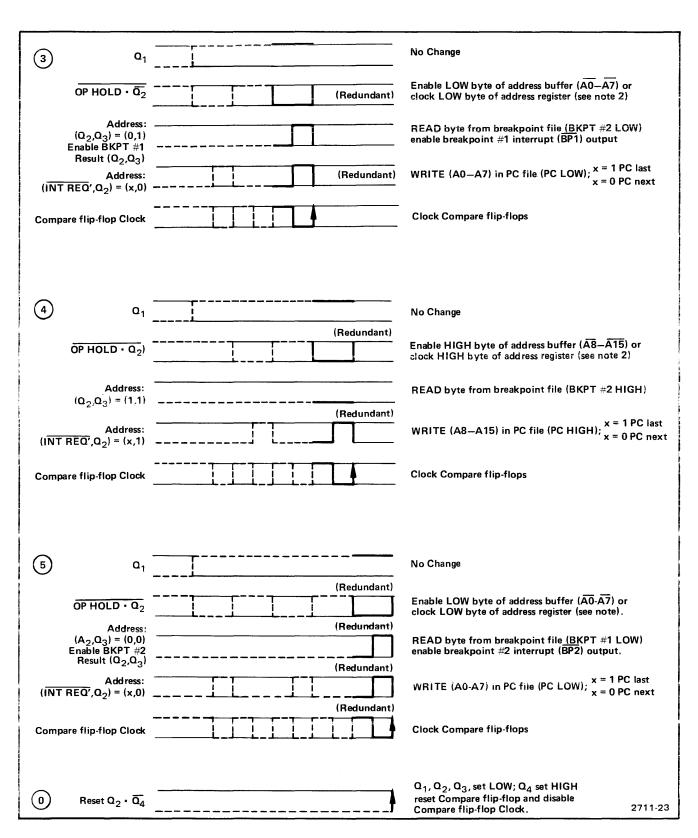


Fig. 6-3B. Sequencer State Timing Diagrams.

BREAKPOINT COMPARISON LOGIC



During the Bus Sequencer operation, the Breakpoint Register Files are sequentially accessed for the high and low bytes of two breakpoint addresses. When each byte of the breakpoint addresses is read, it is sensed by the Address Comparator (U2040, U3040). At the same time, the internal 8-bit bus is also input to the Address Comparator. The breakpoint values are stored in the Breakpoint Register File in complementary form. Therefore, a valid comparison is made between two values that are the complement of each other. The next paragraph begins the hardware discussion.

The eight exclusive-OR gates (U3040, U2040) of the Address comparator (schematic 4C, center) are of open-collector type and are hardwired together. The output of the Address Comparator is high only if the address inputs are the complement of each other. This output is sensed by two cascaded J-K flip-flops (U4090), configured as D-type, in the Debug Control Logic (schematic 4C, upper center). Notice from the State Timing Diagram (Fig. 6-3) that these flip-flops are clocked at the end of each time state.

During time states 1 and 2, Breakpoint 1 is compared; during time states 3 and 4, Breakpoint 2 is compared. The Q output of U4090A will be high at the beginning of time state 3 or 5 if a valid comparison was made. This output is sensed by U4080, which is used to enable a multiplexer (U3010) in the Debug Control Logic. The Select input to this multiplexer is the system control bus line R/\overline{W} . R/\overline{W} selects between two pairs of inputs latched in the Debug Control Byte Latch (U3020). These inputs are set by the user as breakpoints for Read operations, Write operations, or both. The multiplexer output is sensed by U4100, which generates the Breakpoint results (BP1, BP2). BP1 and BP2 interrupt the System Processor via the Debug Interrupt Logic (schematic 4D, lower center and right).

During time states 3 and 5, U4100 is enabled by Sequencer outputs Q_3 and \overline{Q}_3 . During the same time state the four-input NAND gate (U4080) is enabled by Sequencer output Q_2 .

The two other inputs to U4080 are the 9.984 MHz clock and the system control bus line MEM/IO. It is the MEM/IO line that guarantees that breakpoint interrupts occur only for memory addresses and not for addresses. Notice that the MEM/IO input is sensed by U4110B, which is normally enabled. However, if a Maintenance Front Panel LOAD ADDR or TEST operation is performed, the MEM/IO input is masked and U4080 cannot be enabled. During such a Maintenance Front Panel operation, breakpoint interrupts are thus disallowed.

The Forced Jump Address Register (U4020, U5020, U4030, and U5030, schematic 4C, lower right) may also be incremented or decremented by the Maintenance Front Panel INCR ADDR/DECR ADDR switch. The control signals from the Maintenance Front Panel INCR ADDR/DECR ADDR switch are sensed by INC and DEC (schematic 4C, lower left), respectively, and direct the Forced Jump Address Register.

Debug Control Logic



The Debug Control logic coordinates the following operations: address breakpoints, emulator processor registers, and forced jump operations.

The Debug Control logic includes a multiplexer (U5010), which controls access to the Forced Jump Address Register, and the Breakpoint Compare flip-flop (U4090A), which stores the result of the breakpoint exclusive-OR comparison.

Associated with the Debug Control logic are the Debug Control Byte Latch (U3020, U3010, U4100) and the Trace Enable flip-flop (U5120C, U4120D). These two areas are discussed in the following paragraph. Following these discussions is a description of two Maintenance Front Panel switch functions that utilize the Debug Control Logic.

DEBUG CONTROL BYTE LATCH

All debugging operations are controlled by the System Processor. The System Processor issues a control byte (see Fig. 6-2), which contains all debug operating conditions. The control byte is latched into U3020 by OUT CNTRL from the I/O Decoder Logic (schematic 4C, upper right).

TRACE ENABLE FLIP-FLOP 4C



The Trace Enable FF is enabled by two inputs. The first input, SLVTR is the result of TR (output Q3 of the Debug Control Byte Latch) NANDed with the inverted ANDed result of two other inputs: the Q output of the MSTR/SLV FF, and RUN ACCESS. (All of these signals are shown on schematic 4B.) This gating sets SLV TR low if the Debug mode has been enabled (TR is high) and the MSTR/SLV FF is set for a System Processor pause. Thus only the emulator processor may be traced. If the Maintenance Front Panel ENABLE/NORM switch is in the ENABLE position (ACCESS is low), the SLV TR input is forced high and the Trace Enable FF is disabled.

The second enabling input to the Trace Enable FF is MSTR CPU TEST (Maintenance Front Panel TEST switch is ON).

Maintenance Front Panel Operations

Debug Control logic and the bus Sequencer are affected by two Maintenance Front Panel operations: Maintenance Front Panel Access and Maintenance Front Panel TEST switch operations.

Refer to schematic 4C. During a Maintenance Front Panel access, the Sequencer begins operation when the LOAD ADDR switch is toggled. The Address Bus Buffer is inhibited and the low and high bytes from the Maintenance Front Panel address switches are multiplexed onto the internal bus. Instead of the Program Counter Register File (U2050, U3050) being loaded, the low and high bytes of a Forced Jump Address Register (U4020, U4030, U5020, U5030, schematic 4C, lower right) are loaded.

When the Maintenance Front Panel TEST switch is in the ON position, the Sequencer operates normally, except that the Forced Jump Address Register (U4020, U4030, U5020, and U5030) is loaded from the address bus at the same time the Program Counter Register File is loaded. Emulator processor operation is not required.

@ 6-17

MAINTENANCE FRONT PANEL LOAD ADDR SWITCH

The Q output of the Trace Enable FF is one input to an inverting OR gate (U5120A). The other input is the Q output of the LOAD FF. The LOAD FF input is hardwired such that, when it is clocked by the Maintenance Front Panel switch LOAD ADDR, the Q output is set low. The LOAD ADDR switch is used for loading the Forced Jump Address Register (U4020, U5020, U4030, U5030) with the address value designated by the Maintenance Front Panel address switches. When either of these two inputs to U5120A is set low, the output is set high. This results in removing the Sequencer reset and following it to perform the sequence of operation discussed under the Sequencer/Breakpoint/P.C. Register Timing heading. When the sixth and last time state is reached, the AND result of Sequencer outputs \overline{Q}_2 and \overline{Q}_4 is low and resets the Trace Enable, Program Counter, and LOAD FFs. (The Program Counter FF is discussed at the end of this topic.) The corresponding inverted OR result of the LOAD FF Q and Trace Enable \overline{Q} outputs is low; this immediately resets the Sequencer flips (U5100, U5110).

When the Maintenance Front Panel LOAD ADDR switch is used, the ENABLE/NORM switch must be in the ENABLE position (ACCESS is low). As just discussed, the \overline{SLVTR} input to the Trace Enable FF is set high. Once the ENABLE/NORM switch has been placed in the ENABLE position, the LOAD ADDR switch may be depressed. Two high output pulses (OPREQ' and LOAD) are immediately generated. OPREQ' clocks the Trace Enable FF; since \overline{SLVTR} is high, and the Maintenance Front Panel TEST switch is OFF the Q output (OP HOLD) is set low. LOAD clocks the LOAD FF and sets its Q output low; this removes the Sequencer reset via U5120A. The Sequencer is thus allowed to run until it generates the next reset condition. Recall that outputs Q_2 and \overline{Q}_2 of the Sequencer are used to enable the low and high bytes of the address buffer when OP HOLD is high (see Fig. 6-3). Notice that Q_2 and \overline{Q}_2 are input to two NAND gates (U4100C, U4100D) which are enabled by OP HOLD. Since OP HOLD is low, the NAND gate inputs are forced high and the address buffer remains disabled.

Outputs Q_2 and $\overline{Q_2}$ of the Sequencer are also input to U5090 (schematic 4C, upper center) together with the 9.984 MHz clock. The U5090 outputs are used by the Multiplexer (U5010) to control access to the Forced Jump Address Register (U4020, U5020, U4030, U5030, schematic 4C, lower right). The two U5010 outputs are used to clock the low and high byte registers of the Forced Jump Address Register.

The second set of inputs to the Multiplexer are generated by the I/O Decoder Logic (schematic 4D). These signals correspond to the low and high byte registers of the Forced Jump Address Register. Thus, the System Processor may load the Forced Jump Address Register directly (with a software GO command). The Multiplexer is normally enabled to allow the I/O Decoder Logic to access the Forced Jump Address Register.

Remember that the LOAD FF Q output is set low (enabling the Sequencer via U5120A) and Sequencer output Q_1 is set high when the sequence of operations begins. It is the NAND result of these two inputs that directs the Multiplexer to select the Sequencer—10 MHz clock inputs.

The Maintenance Front Panel logic enables the high and low bytes of the address switches onto the internal 8-bit bus sequentially via the F.P. Address Buffer. This operation is controlled by Sequencer output Q_2 . Output Q_2 is inverted by U2070A (schematic 4C, upper right) and called LD SEL. When LD SEL is low, the high address byte is selected. When LD SEL is high, the low address byte is selected.

MAINTENANCE FRONT PANEL TEST SWITCH

When the Maintenance Front Panel TEST switch is in the TEST position (MSTR CPU TEST is low) and the Trace Enable FF is clocked by OPREQ', OP HOLD is set high. Recall that MSTR CPU TEST and the Q output of the Load FF are ORed together (U5120D). The Multiplexer (U5010) is enabled to select the Sequencer—10 MHz clock input when either input to U5120D is low. Therefore, when the Maintenance Front Panel TEST switch is in the TEST position, the Forced Jump Address Register is loaded with the address on the system bus. This operation occurs independent of which processor is running.

A second function of the TEST switch is to mask the result of the MSTR HALT FF (U2150A, schematic 4B) when the System Processor executes a software HALT instruction. The emulator processor is prevented from running because the MSTR/SLV FF cannot change states, due to the mask (see System Processor/Emulator Control Logic). Also recall that the NAND result of the Q output from the MSTR HALT FF (U2150A) and an inverted MSTR CPU TEST force the address bus to contain the last address executed. This allows the Maintenance Front Panel to display the address.


To summarize, when the Maintenance Front Panel TEST switch is placed in the TEST position, a System Processor software HALT instruction can become a breakpoint, and the display of the last address executed by either processor may be displayed. At that point, both processors remain paused.

Forced Jump Logic (A) (B) (B) **GENERAL**









The emulator processor contains a jump sequencer and data multiplexing logic which, when triggered, substitutes an unconditional branch for the next instruction fetched. The jump sequencer controls the high and low bytes of the jump address that is placed on the emulator processor data bus. This jump address is stored in the Forced Jump Address Register on the Debug module (schematic 4C, lower right). On System Processor I/O commands, the jump address is loaded and a jump command trigger is given to the emulator processor. During the jump sequence, the Debug module places the jump address on the system address bus for use by the emulator processor.

CIRCUIT DESCRIPTION

The operation of the Forced Jump Logic is discussed in the following paragraphs. First this discussion describes how the emulator processor is force-jumped by a System Processor I/O command. Single cycle, breakpoint, and Maintenance Front Panel forced jumps are discussed thereafter.

The System Processor normally relinquishes control to the emulator processor by executing a software HALT instruction. Recall that when control is turned over to the emulator processor, the status of the MSTR/SLV FF (U2150A, schematic 4B, lower center) is changed; the Q output goes low. This output is labeled MSTR. MSTR is inverted and sensed by U5140C (schematic 4A, left center). The other input to U5140C is the Q output of the Forced Jump Enable FF (schematic 4A, center left). The System Processor enables this flip-flop by the command byte output to port F8 as described in the I/O Decoder Logic. Therefore, if the Forced Jump Enable FF is enabled, MSTR is presented as the output from U5140C. Otherwise, the output is high. The output of U5140C is fed to U1120.

When control is turned over to the emulator processor, MSTR goes low and the output of U1120 goes high. The resulting low-to-high transition clocks the SLV JMP INIT FF (U2150B, schematic 4A, center). This flip-flop is hardwired such that when it is clocked, its Q output (SLV JMP INIT) goes high. SLV JMP INIT is latched into U4160B (schematic 4B, upper right) by the 10 MHz SYS CLK. The resulting Q output (SLV JMP) is inverted, fed to U1070 (schematic 4A, upper right), and output as a Jump Command (JMP CMD) to the emulator processor control bus. (The second input to U1070 has the same effect but is caused by the RTPA module.) Together, these two flip-flops (U2150B, U4160B) generate a 100 ns JMP CMD which arms the jump mechanism of the emulator processor. Notice that SLV JMP is ORed with the system RESET line and, therefore, resets the SLV JMP INIT FF when it is high. This sets SLV JMP INIT low and causes SLV JMP to be set low on the next rising edge of the 10 MHz clock.

After receipt of the 100 ns Jump Command, the emulator processor generates a forced branch instruction on the data bus during the next instruction fetch. On the leading edge of the following OPREQ (in which the Emulator receives the high byte of the jump address), JMP ACK is generated. JMP ACK is sensed by U5160 (schematic 4B, upper right). The resulting output (EN ADDR) is high when JMP ACK is low. EN ADDR enables the tristate address buffer (schematic 4C, lower right). This allows the latched address output by the Forced Jump Address Register to be placed onto the system address bus. The emulator processor multiplexes the high and low bytes of the address bus onto its data bus as required for the particular JUMP instruction. The emulator processor then resets JMP ACK.

Single Cycle Interrupt SINGLE STEP ENABLE LOGIC 4A



During the single cycle mode of operation, the emulator processor is paused after execution of a single instruction, and the System Processor is interrupted. When paused, the emulator processor stops after fetching the first byte of the next instruction. Since it is necessary to jump the emulator processor to a register dump routine without any intervening instructions, the

forced unconditional branch command must be received before the emulator processor stops. The System Processor then takes control and loads the Debug module Forced Jump Address Register with the jump address. The System Processor then halts, reenabling the emulator processor, which jumps to the register dump routine.

CIRCUIT DESCRIPTION

The Single Cycle enable logic (schematic 4A, center right) consists of a flip-flop (U5130) enabled by the System Processor control byte (see I/O Decoder Logic). An emulator processor Fetch clocks U5130, setting the Q output (S/CY INT) low. This causes a System Processor interrupt, which automatically pauses the emulator processor at the end of a single instruction. Notice that S/CY INT is also fed to U1120 (schematic 4A, center) which is used in the Forced Jump Logic to initiate the emulator processor forced jump. The emulator processor thus receives a JMP CMD and forces the emulator processor to receive an unconditional jump instruction before it is paused.

Notice that when a \overline{JMP} ACK is issued, a Jump Pending flip-flop (U4150A, schematic 4B) is set. The \overline{Q} output (JMP PEND) is used to mask the SIN/CY EN bit from the Debug Control Byte Register. The next single cycle interrupt is inhibited due to the fetch of the next instruction (unconditional jump).

Maintenance Front Panel and Breakpoint Forced Jump Logic





The Maintenance Front Panel switch JUMP and the breakpoint interrupts (BP1, BP2) cause a forced jump operation identical to that previously described. A forced jump is initiated by U1120 (schematic 4A, center) whenever any of its inputs go low. If the input is a breakpoint (BP1 or BP2) the System Processor is also interrupted. The emulator processor is paused after it receives the unconditional jump instruction. The System Processor loads the jump destination into the Forced Jump Address Register (U4020, U5020, U4030, and U5030, schematic 4C) and then returns control to the emulator processor. The emulator processor completes its jump to the desired location. The Maintenance Front Panel jump destination must be loaded into the Forced Jump Address Register via the LOAD ADDR switch before the JUMP switch is depressed.

Debug Module Control

The Debug Module Control logic senses the system bus and Maintenance Front Panel control signals that direct the operation of the Debug Module. An understanding of these control signals and the corresponding functions clearly defines the operation of the Debug Module Control Logic. A listing of the system bus signals is given in Appendix A.

@ **6-21**

Section 7 8001 SYSTEM MEMORY MODULE

INTRODUCTION

The 8001 System Memory module contains the operating system software (TEKOPS) for the 8001 μ Processor Lab. This module consists of 6K bytes of ROM (Read Only Memory) for the operating system, 2K bytes of RAM (Random Access Memory), and can contain sixteen 2K-byte banks of bank-selectable ROM. More ROM may be gained by installing up to three more memory modules, each containing the sixteen 2K-byte banks of selectable ROM.

An additional 1K bytes of PROM are available to allow the 6K-byte operating system or the bank-selectable ROM to be patched. Patches are made to update, or to fix firmware errors. Patch PROM Logic is discussed later in this section.

The 8001 System Memory module will be discussed in the following order:

- Select Logic
- Address Decoder
- ●Read/Write Control Logic
- Hold Logic
- ●Bank Switch Logic
- •2K RAM and Parity Control Logic
- Patch PROM Logic
- 6K ROM and Patch Address Logic
- Patch Address Identifier

CIRCUIT DESCRIPTION

Select Logic

IO/SYSTEM MEMORY DECODER



The IO/System Memory Decoder detects when the System Processor is accessing System Memory. The IO/System Memory Decoder converts addresses A13—A15 and the appropriate system control signals to either an Input/Output $(\overline{IO}, U2010A)$ or System Memory $(\overline{M}, U1020B)$ signal. When the System Processor is accessing an input/output port, the \overline{IO} line is low. When the System Processor is accessing System Memory, the \overline{M} line is low.

Address Decoder



The Address Decoder converts addresses A10—A13 to a signal that enables the selected memory field. Table 7-1 shows the address bit patterns for each of the four memory fields.

Table 7-1
8001 SYSTEM MEMORY ADDRESS SELECTION

| Address Field Bits | 6K ROM | 2k RAM | Patch ROM | Bank Switch ROM |
|-----------------------|--------|--------|-----------|-----------------|
| A10 | x | х | 1 | × |
| A11 | 010 | 1 | 0 | 0 |
| A12 | 0 0 1 | 1 | 1 | o |
| A13 | 0 | × | 1 | 1 |

X: don't care

Read/Write Control Logic



The Read/Write Control Logic controls the input/output mode of the Bidirectional Data Bus Buffer (U5060, U5070 schematic 5A, lower left) to System Memory. When M is low, the Read/Write Control Logic allows the \overline{R}/W signal to control the Bidirectional Data Bus Buffer. When \overline{M} is high, the Buffer is in the input mode. When the Bank Switch ROM is accessed, the Buffer is controlled by Board Select (BD SEL). The Bank Switch ROM (schematic 5D) consists of one to four modules. The selected module of Bank Switch ROM will generate a BD SEL (Board Select) signal. The BD SEL is sensed by the Read/Write Control logic. When BD SEL is high, signals \overline{M} and \overline{R}/W control the operation, as previously described. If BD SEL is low and the Bank Switch ROM has been addressed, the Bidirectional Bus Buffer is in the input mode.

Hold Logic



The Hold Logic is reserved for future needs but is not used at this writing.

Bank Switch Logic



Bank Switch Logic allows selection of a 2K-byte bank of ROM from one of up to four modules; each module consists of 16 banks. The individual bank is selected by the System Processor. The System Processor issues a 6-bit (B0—B5) Bank Select command to I/O port C8.

The I/O port decoder (U5100B, U5110A; schematic 5D, upper left) detects the I/O address write and generates a write strobe. The write strobe latches the Bank Select command in the bank select register (U2070). The module selector (U2100) decodes bits B4 and B5 of the Bank Select command into the BD SEL signal, which enables the selected module. The 0 output of U2100 is

selected if only one System Memory module is used. If more than one System Memory module is used, each has a unique output. For example, the second System Memory module would use output 1 of U2100 to generate BD SEL.

Bit B3 of the Bank Select command is used by the upper /lower bank selector (U2080, U2090) to enable either the upper eight or lower eight banks on the selected module. The Bank Decoder uses bits B0-B2 to select one of these eight banks. Refer to Table 7-2.

Table 7-2 **BANK SELECTION**

| Function | Module | Upper/Lov | ver Banks | | | | Ban | k Sel | ect | | |
|----------|---------|-----------|------------|---|-----|----|-----|-------|-----|----|----|
| Bits | 0 1 2 3 | | | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| Dita | | Banks 0-7 | Banks 8-15 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| В0 | | _ | _ | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| B1 | | - | _ | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 |
| B2 | | - | _ | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| B3 | | 0 | 1 | - | - | - | - | | - | - | _ |
| B4 | 0 1 0 1 | _ | _ | - | - | - | - | _ | - | - | _ |
| B5 | 0 0 1 1 | - | - | | · - | - | | - | _ | - | - |

The upper/lower bank selector is controlled by the BK SW ROM line. When the Bank Switch ROM is addressed, BK SW ROM goes low and bit B3 from the bank select register is decoded. The selected bank is then addressed.

2K RAM and Parity Control Logic 5

The 2K RAM consists of two 1K X 9-bit memory fields. Each field is made up of two 1K X 4-bit RAMs and one 1K X 1-bit RAM. Two 4-bit devices are used to make up a 1K X 8-bit RAM, with a 1bit device used as parity RAM. When the 2K RAM is addressed, the RAM decoder (U1050, U2050) uses address A10 to select one of the two 1K X 9-bit memory fields.

2K RAM WRITE

During a Write operation, data D0-D7 is stored in the selected 1K RAM and is sensed by P1—P8 of the parity generator (U2110). The R/W control line is in the Write mode (low) and keeps bit P9 of the parity generator high. When the parity line EVEN OUT is high, even parity is sensed. If EVEN OUT is low, odd parity is sensed. The generated parity is stored in the parity RAM (U1070 or U1080).

2K RAM READ

During a Read operation, data DO—D7 is read by the System Processor and sensed by P1—P8 of the parity generator. The parity bit from the parity RAM is inverted and sensed by P9 of the parity generator. The parity line EVEN OUT should always be low when checking parity. The status of EVEN OUT is latched by the parity interrupt logic (U1040A, U2040D) at the end of a read cycle. If EVEN OUT is high, an interrupt is generated, indicating non-valid data.

Generation of a Parity Interrupt causes the Priority Interrupt Encoder on the System Processor module to put an interrupt vector onto the system data bus. This interrupt vector is converted by the interrupt vector decoder (U5080, U2030, and U2020) into a signal used in resetting the parity interrupt logic (U1040A, U2040D).

Patch PROM Logic 5B



The 8001 System Memory module contains the TEKOPS operating system. If, in the future, it becomes necessary to alter a small segment of the operating system, Patch PROM Logic will support the modification.

Basically, when an error needs correction, a PROM programmed with the correction can be plugged into location U3020. Then, whenever the bad area of memory is accessed, the Patch PROM would be enabled, thus replacing the bad portion of System Memory.

6K ROM and Patch Address Logic 〈5B)



The patch PROM (U3020) allows the 6K ROM or Bank Switch 32K ROM to be altered. The Patch Address selector (PAS, U4010) allows the Patch Address Identifier (PAI, U4020, U4030) to monitor either the Bank Switch ROM or the 6K ROM address space.

The Patch Address Selector (U4010) is controlled by the Bank Switch (BS) signal line from the Bank Switch Logic. When BS is high, the Bank Switch ROM addresses (BO-B3) are selected. When BS is low, the 6K ROM addresses (6K ROM, A1, A11, A12) are selected.

Patch Address Identifier (5B)





A Patch Address Identifier (U4020 and U4030) is preprogrammed to identify an address to be patched. When the address is identified, a preprogrammed byte is presented by the Patch PROM Address Logic (U5010 and U5020) to the Patch PROM. The Patch PROM then generates the corrected data.

The Patch Address Identifier consists of two Field Programmable Logic Arrays (FPLA) in parallel (U4020 and U4030). Each FPLA can be viewed as a conditionally addressable memory, identifying preprogrammed address combinations. This FPLA can scan a total address field of up to 16K 14-bit words and select 48 eight-bit preprogrammed bytes within that address space. Using two FPLAs in parallel allows a total of 96 address patches to be made. Programming of the FPLAs is done at the factory.

When the Patch Address Identifier identifies an address to be patched, a preprogrammed data byte is output as F0—F7. Bit F7 controls the patch PROM selector; when bit F7 is high, the Patch PROM may be addressed directly by the System Processor. When bit F7 is low, the Patch PROM is addressed by bits F0—F5 and addresses A0—A2. The 6K ROM and Bank Switch ROM are selected when bit F7 is high. When bit F6 is high, it complements address A2. Complementing A2 allows for a high density of patches in the patch PROM.

Section 8 HIGH-SPEED MEMORY MODULE

INTRODUCTION

The High-Speed Memory module provides Random Access Memory (RAM) for the 8001/8002A μ Processor Lab. The High-Speed Memory module is used as Program Memory for the 8001 and 8002A μ Processor Labs, and as System Memory for the 8002A μ Processor Lab. The 8001/8002A μ Processor Lab will accept up to four Program memory modules (64K bytes of memory).

The High-Speed Memory module RAM is arranged into a 16K X 9-bit word configuration. The ninth bit is used as a parity bit.

The High-Speed Memory module is used as 8002A System Memory by changing a few switch settings and adding one PROM. These switch settings are discussed later in this section. The PROM contains a bootstrap program, which initializes the system and loads TEKDOS from flexible disc into System Memory when the system is first turned on or is reset. The PROM replaces the first 256 bytes of RAM.

The High-Speed Memory module is designed for use with byte-oriented emulator processors. By configuring two modules as a pair (providing 16 data bits), the High-Speed Memory may be used with 16-bit word-oriented emulator processors.

The High-Speed Memory module is described in the following order:

- Module Configuration
- RAM Memory
- PROM Memory
- Data and Parity Control
- Address Control
- Module Configuration Logic
- Refresh Request Logic
- Operation Control and Timing

MODULE CONFIGURATION

The High-Speed Memory module is configured for use as System or Program Memory and for byte or word mode through the use of six switches. The functions of each switch are given in Table 8-1. Tables 8-2 and 8-3 summarize address selection options. Switch S4140 is shown on schematic 6A.

NOTE

Reliability is reduced if 8002A μ Processor Lab Program Memory modules are reconfigured for System Memory Operation, or vice-versa. Reliability will also be reduced with the 8001 or 8002A if Program Memory is made up of both High-Speed and 16K Dynamic RAM modules.

REV A OCT 1979 8-1

Table 8-1
SWITCH FUNCTIONS FOR MODULE CONFIGURATION

| S4140-1 | A15 | Switch in the ON position indicates that the module will respond to memory addresses in which $A15 = True$, provided all other selection conditions are met. |
|---------|---------------|--|
| S4140-2 | A14 | Switch in the ON position indicates that the module will respond to memory addresses in which A14 $=$ True, provided all other selection conditions are met. |
| | | When two or more memory modules are used in the byte mode, module addresses are determined by the A14 and A15 switches. If a system is set up with 32K of memory (two modules), module A will be configured with both A14 and A15 switches OFF; module B will have switch A14 ON and switch A15 OFF. Module A will contain addresses 0000H-3FFFH, module B will contain addresses 4000H-7FFFH. Since switch A14 of module A is set for OFF, all addresses with address bus lines A14 False and A15 False will enable module A; all addresses with A15 False and A14 True will enable module B. When only two modules are used (32K), all addresses above 7FFFH will cause a memory space error message to occur. |
| S4140-3 | Byte∕ Word | Switch in the ON position configures the module to serve as one module in a 16-bit word mode pair. The module will provide either bits D0—D7 or bits D8—D15 of the 16-bit data bus, depending on the setting of switch S4140-6. If switch S4140-3 is in the ON position, S4140-1 (A15) is ignored. |
| S4140-4 | Sys/ Prog. | Switch in the ON position configures the module for operation in the Program side of the μ Processor Lab. Switch in the OFF position configures the board for 8002A System Memory operation. |
| S4140-5 | PROM | Switch in the ON position indicates that a 82S115 PROM is installed at location U7050, as required for 8002A System Memory operation. |
| S4140-6 | HI/LO | Switch in the ON position configures the module to provide bits D8—D15 of a 16-bit data bus. If the switch is set in the OFF position, the board will provide bits D0—D7 of the 16-bit bus. This switch works in conjunction with switch S4140-3. |
| | | When the module is not used as part of a 16-bit word mode pair, the switch must be set in the OFF position. |

Table 8-2
MODULE ADDRESS SWITCHES

| Program | | Swit | ches |
|------------------|-------------------|------|------|
| Memory Module | Memory Address | A15 | A14 |
| Α | 0000 3FFF | OFF | OFF |
| В | 4000 – 7FFF | OFF | ON |
| С | 8000 BFFF | ON | OFF |
| D | C000 – FFFF | ON | ON |

Table 8-3
SYSTEM/PROGRAM MEMORY CONFIGURATION

| Switch | Switch Setting For System Memory Use | Switch Setting For Program Memory Use |
|-------------------------------|--|---|
| S4140-4 (SYS/PROG) | OFF | ON |
| S4140-5 (PROM RESIDENT) | ON | OFF |

Table 8-2 shows the address range assigned to each Program Memory module. When more than one module is used in a system, the settings of switches S4140-2 determine the address range of each module. For example, when the system is configured for 48K or 64K of Program Memory, the third module would have switch S4140-1 in the ON position and switch S4140-2 in the OFF position. The memory address range of this third module would be from 8000H—BFFFH.

Table 8-3 shows the setting of switches S4140-4 and S4140-5 for System Memory and Program Memory use.

CIRCUIT DESCRIPTION

RAM Memory 6B



Data is stored in an array of 4K X1-bit RAM devices on the High-Speed Memory module. The memory array is composed of four banks of eight devices each. The module thus provides 16K X 8 bits of Random Access Memory (RAM).

Each 16-pin RAM device uses six multiplexed address lines, MAO—MA5, to address the 64 internal rows and 64 internal columns. Another address line, MA6, is the Chip Select (CS) line to each device. The seven lines MAO-MA6 are generated by an Address Control circuit that derives them from A0—A13 of the system address bus. This Address Control circuit is explained later in this section.

The RAM devices on this module are thus addressed by six lines, rather than the 12 address lines used by many types of memory devices. Two clocks, RAS and CAS, are used to activate the devices. Each of the four banks of devices is enabled by its respective row address strobe (RASO, RAS1, RAS2, or RAS3) and by its column address strobe (CAS1 or CAS2). CAS1 and CAS2 each clock two of the four banks of devices.

PROM Memory (A)



When the High-Speed Memory module is used as 8002A System Memory, the bootstrap PROM (U7050) replaces the first 256 bytes of RAM. This 256-byte PROM stores the routine that initializes the system and loads TEKDOS from the Flexible Disc Unit into System Memory at a power-up or system reset.


For use as System Memory, the High-Speed Memory module is inserted in the System side of the μProcessor Lab (usually slot J7); the System/Program switch (S4140-4) is turned OFF; and the PROM Resident switch (S4140-5) is turned ON. (See Tables 8-1 and 8-3.)

The PROM (U7050) is addressed by lines A0—A7 of the system address bus. Data from the bootstrap PROM is output through the module data bus lines D0—D7.

When the module is configured for Program Memory, the PROM circuitry is essentially removed from the circuit, and the PROM itself may be removed from the module.

Data and Parity Control

Data to and from the memory module is routed and checked for parity by the Data and Parity Control circuitry.



The High-Speed Memory module receives data lines D0—D15 from the μ Processor Lab system bus. These lines are received and buffered by transceivers U6070 and U6080 (for lines D0—D7), and U6090 and U6100 (for D8—D15). Only lines D0—D7 are used with byte-oriented emulator processors.

Two memory modules are required for 16-bit word-oriented emulator processors. In word mode, one module is designated as the low-byte module (the lower eight bits, D0—D7) and the other as the high-byte module (the upper eight bits, D8—D15). In byte mode, or as low byte of word mode, the buffers for D0—D7 are enabled by Write Low (WL) to receive data from the system data bus; the buffers for D8—D15 are held in the high-impedance state. As high byte of word mode, the D0—D7 buffers are held in the high-impedance state, while those for D8—D15 are enabled by Write High (WH) to write in data.

DATA READ 6B 6C 6C

Data is read out of memory by addressing the desired bank of RAM. The selected data is read into data registers U6040 and U6030 (schematic 6C) through lines D0—D7 from the RAM devices. The data is retained in the registers until the LATCH pulse occurs. Data is latched through the registers to the data bus buffers (U6070, U6080, U6090, and U6100, schematic 6B, left) on data lines LATCH 0—LATCH 7. If the module is being used in byte mode or as low byte of word mode, Read Low (RL) will enable U6070 and U6080 to output the data on D0—D7. A module configured for high byte of a word mode pair will output the data on D8—D15. Data on D8—D15 is output through data bus buffers U6090 and U6100. Data bus buffers U6090 and U6100 are enabled to output data to the bus by Read High (RH).

PARITY 6C 000

To assure that data stored in memory is valid, the stored data is checked by the parity circuitry. The parity circuitry of the High-Speed Memory module generates, stores, and checks parity of data input to the module. The following paragraphs describe the operation of the parity logic.

As data is written into RAM, R0—R7 are sampled by the parity generator (U6110). The even-sum output of the parity generator is stored in four RAM devices (U2020, U3020, U4020, and U5020), of the same type as those of the RAM Memory array. Each of these four devices corresponds to one of the four banks of the RAM memory array. These devices are addressed in the same manner as the selected bank of RAM. Data in, however, is from the parity generator rather than the system data bus.

When a bank of RAM is selected to be read, the corresponding parity bit RAM will also be read. The parity bit RAMs are read directly to the parity checker (U6020), while the data memory is first read into the data latches (U6030 and U6040) and then into the parity checker. The parity checker (U6020) compares Latch 0—Latch 7 with the parity bit, checking for even parity, to determine data validity. A High at the odd-sum output (pin 6) of the parity checker indicates even parity and that the stored data is valid.

If the parity checker finds odd parity, the odd-sum output will go Low, indicating a parity error. The output of the parity checker is connected as an input to the parity error detector flip-flop (U5160B). If the signal from the parity checker is Low, the parity error flip-flop will toggle when clocked by Parity Strobe (PAR STR, a signal from the timing circuitry of the module, schematic 6D). The output of this flip-flop will be the parity error signal.

PARITY ERROR SIGNAL

The parity error signal performs two tasks. The first task is to remove reset from flip-flop U5160A, allowing it to receive Master Interrupt Acknowledge (MST INTACK). The second function of the parity error signal is to cause an interrupt to be generated by the module.

PARITY INTERRUPT

The parity error signal is input from U5160B to the parity error multiplexer (U5150). The multiplexer outputs are selected by PMEM (from the Module Configuration circuitry, schematic 6A). PMEM indicates that the module is configured for Program Memory use and causes the multiplexer to select the A inputs. When the module is configured for System Memory, B inputs are selected. The multiplexer will produce the parity error signal either as a Master Interrupt 1, MSTINT1 (when the module is used as System Memory) or Master Interrupt 3, MSTINT3 (when the module is used as Program Memory). When the System Processor receives the interrupt, it will respond with an interrupt vector on the data bus, and will produce a Master Interrupt Acknowledge (MST INTACK) to acknowledge the interrupt.

The interrupt vector on the data bus is decoded by the interrupt decoder (U6120A schematic 6C, center). The decoder has four inputs: R1; the wired-OR function of R4, R5, and R6; D3; and D2 or R2 (depending on the module configuration). When the decoder receives either interrupt vector 0002 (in System Memory) or 0006 (in Program MMemory) from the system, a flag reset signal is generated, and input to flip-flop U5160A. Upon receiving the MST INTACK, U5160A will toggle, setting U5160B to remove the parity error signal. This circuitry does not correct the parity error; its function is only to detect the error and signal the System Processor.

Refresh Clock

The parity multiplexer also generates a signal, Refresh Clock (REF CLK). REF CLK is not related to parity, but is used by the Refresh Request circuitry. Refresh operations are discussed later in this section.

Address Control



The Address Control logic controls address lines A0—A15 to accomplish module selection, byte/word shifting, and refresh operation on the High-Speed Memory module. Row address clocks RASO—RAS3 are generated within the Address Control circuitry.

In byte mode operation, the address lines have the following responsibilities:

A14 and A15 select the module. (Up to four Program Memory modules may be present in the μ Processor Lab.)

A12 and A13 select one of the four 4K banks of RAM on the specified module.

A0—A11 select addresses within the specified 4K banks of RAM on the module.

Address bus lines A0—A15 are input to address bus multiplexers (U6130, U6140, U6150, and U6160). Lines BA0—BA15 are output by the multiplexer. When a 16-bit word-oriented emulator processor is used, two Program Memory modules are required. However, the address lines are the same as for byte mode operation.

If memory has been configured for 16-bit word operation, and is then accessed by an 8-bit byteoriented processor, the modules of the word pair are addressed in alternating fashion. Table 8-4 shows that when two memory modules are used as a word pair with a 16-bit emulator processor. both modules respond to the same address. When those two memory modules are used with an 8-bit emulator processor, however, they respond in an alternating fashion to each address. Both modules access only the low data byte. Alternation between modules of the word pair is designated by a HI/LO bit, which enables either the high-byte module or the low-byte module. For byte-oriented access of a word pair, A0 is used as the HI/LO bit, rather than as an address bit. To use AO as the HI/LO bit all address lines must be shifted down. The shift is performed by the address multiplexers. A1 becomes A0 (BA0), A2 becomes A1 (BA1), etc. A0 becomes the HI/LO bit (BA15), alternating the addressing between modules. During a front panel access, no address line shift takes place; HIGH BYTE (line BA15) is used for HI/LO selection. The shift is caused when the module is configured for word mode and the system bus WD ACCESS line indicates that a byte-oriented emulator processor is running.

Address lines BAO—BA13 are input to the single-device address multiplexer and refresh controller (U4120). This multiplexer/controller provides the seven multiplexed address lines MAO—MA6 to the RAM devices. The multiplexer/controller also serves as the refresh counter and multiplexer for the RAM memory devices. It presents the 7-bit refresh address to the memory devices during a refresh cycle.

BANK SELECTION 6A



Selection of one of the four banks of memory devices on the module is controlled by address lines BA12 and BA13. The block decoder (consisting of decoder U3130A and gates U2130 and U2120) decodes BA12 and BA13 into four signals which enable the RAMs. (A third signal is input to decoder U3130A; this signal inhibits the output when the bootstrap PROM is being accessed.)

The decoder (U3130A) creates four signals from the two address inputs. The four signals are input to four 3-input NAND gates (U2120) along with RAS1 and RAS2 from the Operation Control and Timing circuitry (schematic 6D, upper right). The outputs of the NAND gates are RASO, RAS1, RAS2, and RAS3; these four row address strobes enable the RAM banks. A REFOP signal (from schematic 6D, upper right) enables all four strobes simultaneously during a refresh cycle.

PROM Select Decoder



The PROM Select Decoder logic is also part of the Address Control circuitry. The PROM Select Decoder (U7140, schematic 6A, center) receives address lines $\overline{A8}$ — $\overline{A13}$, M/IO, and \overline{PMEM} to detect System Memory PROM addresses. The PROM RESIDENT switch indicates whether the PROM (containing the bootstrap routine) is installed. If the module is configured for 8002A System Memory use and the first 256 bits of memory are addressed, all inputs to the PROM Select Decoder will be High, indicating that the PROM has been addressed. The decoder (U7140) will then generate the signal, PROM, through U5170A to inhibit the RAM enable clocks and enable the PROM.

Module Configuration Logic



Recall that the High-Speed Memory module may be used as either Program Memory or 8002A μ Processor Lab System Memory, in byte mode or word mode, and multiple modules may be used to expand Program Memory. The High-Speed Memory module can be programmed for any of these choices through the use of switch settings and the Module Configuration logic.

The Module Configuration logic basically consists of a multiplexer (U4160), a comparator (U4150), and a decoder (U3130B). Remember that the user sets S4140 to specify the kind of operation required. These switch settings, in conjunction with certain control lines, determine the operating parameters for the High-Speed Memory module.

MULTIPLEXER

The multiplexer (U4160) is controlled by a SELECT line, the NANDed combination of the Word Memory switch and the Program Memory switch. The Program Memory switch acts as the qualifier in this case. (See Table 8-4.) If the S4140-4 is closed, the multiplexer A and B inputs are selected by the Word Memory switch. The A inputs are selected if S4140-3 is open. If S4140-3 is closed, the B inputs are selected.

Table 8-4

MODULE ADDRESSING IN WORD MODE

| | 16-bit Emulator Processor | | | 8-bit Emulator Processor Data | | | | |
|---------------------------------|---------------------------|-----|-----------|--------------------------------|-----------|--------------|--|--|
| | Dat | | | | | | | |
| | LO Module & | LON | LO Module | | HI Module | | | |
| | 0 | 15 | 0 | 7 | 8(0) | 15(7) | | |
| Α | 0000 0001 | | | 0000 0002 | | 0001 0003 | | |
| A D D R E S S | 0002 | | ii | 0004 | | 0005 | | |
| R E | 0003 | | oc | 0006 | | 0007 | | |
| Š | 0004 | | oc | 0008 | | 0009 | | |
| | 0005 | | 00 | 000A | | 000B | | |
| | | | | | | | | |

The 1Y output of multiplexer U4160 indicates whether the module is in word mode or byte mode. The 2Y output indicates whether the module, if in word mode, is addressed by a byte-oriented or word-oriented processor. This is indicated by the state of the WD ACCESS line from the motherboard. The 4Y output indicates a byte-oriented access, when high. When 4Y is low, the output is WD ACCESS.

COMPARATOR

The switch settings of S4140 and the conditions of other control lines are used by the select comparator (U4150) to generate the SELECT signal. Four comparisons are made in order to determine that the module is being accessed.

First, CMEM (input A1) from the motherboard is compared with S4140-4 (input B1). Both inputs must be in the same state for comparison to occur. Second, internal address line BA14 is compared with the A14 switch setting of S4140. Third, S4140-1 is compared with the 1Y output of the multiplexer (U4160). Fourth, BA15 is compared with the High Byte switch (S4140-6).

The \overline{M}/IO line from the motherboard indicates whether memory is indeed being accessed, and is thus used to determine if a comparison should be made. If all comparisons are true, the select comparator generates the SELECT signal.

DECODER

The third component of the Module Configuration logic is the data buffer enabling decoder (U3130B). The decoder uses two inputs to determine which buffers are to be enabled. The A input to the decoder is the WRITE line from the timing circuitry (schematic 6D, lower right). The B input is NANDed combination of the 4Y output of U4160 and the exclusive OR of SWAP and S4140-6.

SWAP is used only with the 9900 Emulator Processor module.

A truth table for the decoder appears on schematic 6A.

Refresh Request Logic





To keep stored data valid, the RAMs must be refreshed sufficiently often. This is accomplished by meeting the device refresh requirements: one row address of the individual RAM device must be refreshed every 31.25 μ s; all six row addresses must be refreshed every 2 ms. The Refresh Request logic insures that sufficient cycles occur, and that they occur at times when memory is not otherwise being used. Figures 8-1 and 8-2 show refresh timing relationships.

A refresh request cycle begins with the falling edge of the I/O CLOCK. (See Fig. 8-1.) A NOR combination of the I/O CLOCK and 19.2 μ s division of SYS CLK clocks the refresh pending flip-flop (U3180A). Refresh Pending establishes the conditions that determine the output of the refresh request flip-flop (U7150). The refresh request flip-flop will generate a Refresh Request when clocked. Refresh Clock (REF CLK), from the Data and Parity Control circuitry, is the clock for the refresh request flip-flop. REF CLK is dependent on whether the module is used as Program Memory or 8002A System Memory.

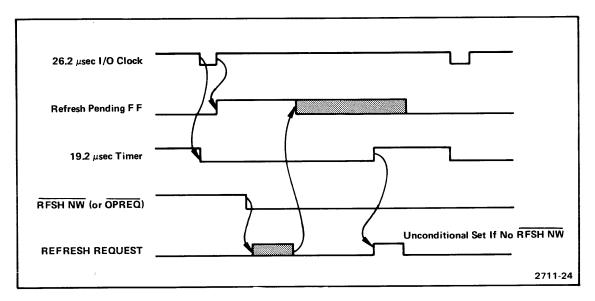


Fig. 8-1. Refresh Timing for High-Speed Memory.

If REF CLK does not trigger a Refresh Request within 19.2 μ s of I/O CLOCK, a 19.2 μ s timer will cause an asynchronous refresh to occur. The timer, made up of a counter (U2180) and an AND gate (U5180A), divides the 10 MHz SYS CLK down to a 19.2 μ s pulse. The rising edge of the 19.2 μ s pulse (see Fig. 8-2) will cause the refresh request flip-flop (U7150) to unconditionally generate Refresh Request. The timer insures that the dynamic memory will be refreshed to keep data valid when the system is accessed by the front panel, the System Processor or emulator processor is halted, or a REF CLK is not received for some reason.

The 19.2 μ s timer pulse is also gated through U7180C with Refresh Pending and an inhibiting line from timing control. The purpose of this gate is to ensure that a refresh is pending and that other operations involving memory cycles have been completed before an asynchronous refresh is requested. Whether synchronous or asynchronous, Refresh Request is input to the Operation Control and Timing circuitry to initiate the refresh cycle.

Operation Control and Timing Logic



The Operation Control circuitry receives requests for refresh, read, and write operations, resolves contention between them and generates the timing signals for refresh, read, and write operations. Access time of the High-Speed Memory is 215 ns (worst case). Figure 8-3 shows the timing relationships.

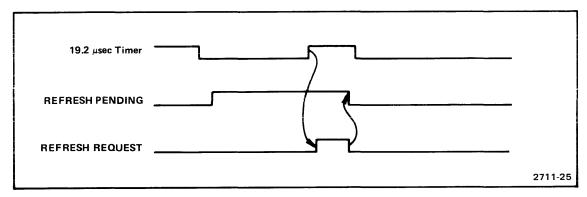


Fig. 8-2. Asynchronous Refresh Timing for High-Speed Memory.

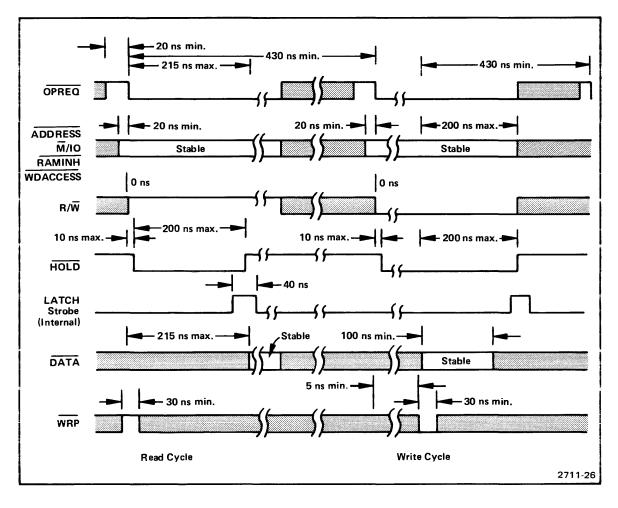


Fig. 8-3. High-Speed Memory Timing.

REFRESH

Refer to Fig. 8-4 for refresh operation timing diagrams. Refresh Request is input to NOR gate U5170B and flip-flop U3160A. A 100 ns inhibit pulse from the timing delay line (DL2140) is also input to the NOR gate. This 100 ns pulse will inhibit a request for any operation within 100 ns following the previous memory cycle. The RAMs require 100 ns to recover from a refresh, read, or write operation. If a refresh request were to occur before 100 ns had elapsed, the inhibit pulse would hold it off until the recovery period was completed.

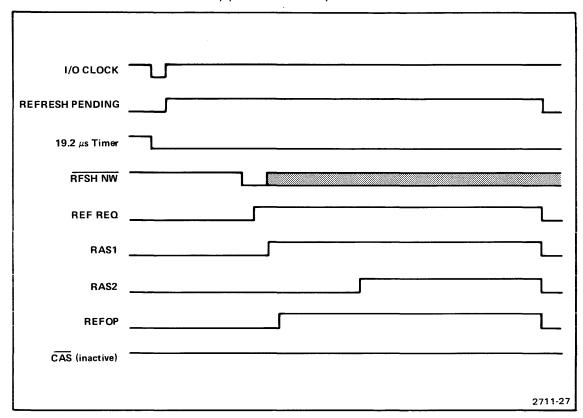


Fig. 8-4. High-Speed Memory Refresh Operation.

From NOR gate U5170B, the refresh request is input to NOR gate U5170D, along with the input for the read or write request. The output of this NOR gate represents a valid operation request. The operation request will clock both flip-flops U3160A and U3170B. In the event that a refresh request and a read or write request occur at the same time, the refresh arbitration circuit (U3160A and U3170B, U5170) will give the refresh request priority. When Refresh Request is generated, flip-flop U3160A will generate a refresh operation when clocked by an operation request.

When an operation request clocks the flip-flops, U3170B will produce RAS1, the first component of the RAS clock generator. RAS1 clocks flip-flop U3160B, which (in a refresh request) is set by U3160A to produce REFOP. When RAS1 is generated, REFOP sets up the Address Control.

Once RAS1 is produced, the following series of timing events takes place. RAS1 is coupled to the input of the delay line (DL2140). The timing signals are derived from the pulses, as they occur along the delay line at the various output taps. CAS1 and CAS2, the column address strobes, are

enabled from the 20 ns tap of the delay line. To do a refresh, only the row address strobes (RAS) are needed; CAS1 and CAS2 are inhibited by REF OP during this operation. The pulse from the 60 ns tap is gated with REFOP to set U3160A, removing the refresh request and creating RAS2. For refresh operations, the other taps are disregarded until the 200 ns tap is reached. The 200 ns tap is NANDed with REF OP, the 60 ns output, and the 100 ns output at U2160A to generate a reset pulse for the refresh request and refresh arbitration circuits. Resetting the refresh arbitration circuitry (U5170B, U4170D, U3160A, and U3170B) removes RAS1 and RAS2. Removing RAS1 sends a positive-going pulse through the delay line, and produces the 100 ns pulse used to inhibit operations during the required 100 ns recovery time. This concludes the refresh operation. The remaining circuitry of the Operation Control and Timing logic is explained in the read and write description that follows.

WRITE

To write into memory, a write operation request is made and the timing operation is begun. The following paragraphs describe the write request and timing. Timing diagrams are in Fig. 8-5: The timing for the write operation, described here, is also used to perform a read operation. Differences between the operations are discussed in the description of the read operation.

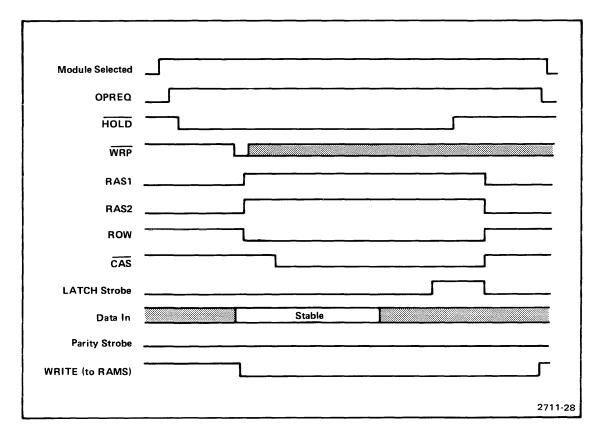


Fig. 8-5. High-Speed Memory Write Cycle.

A memory read or write operation is begun by selecting the module, as previously described. \overline{OPREQ} is used to initiate either a read or write operation and to indicate to the module that an operation is underway. \overline{HOLD} is generated to pause the emulator processor when \overline{OPREQ} clocks U3180B (schematic 6D, lower right). The module is instructed by the system bus R/\overline{W} line to do a write operation. For a write, the sequence is held at this point until Write Pulse $\overline{(WRP)}$ is received. Because of its high speed, \overline{WRP} is caught in latch U4180C (schematic 6D, lower left). The latched version of \overline{WRP} is gated with \overline{OPREQ} and R/\overline{W} at U7180B to create Write Enable $\overline{(WRT EN)}$. The latched WRP is also gated through U6170B (schematic 6D, lower left) to U2160B where it is gated with SELECT, the 100 ns recovery pulse, and the Previous Cycle Ended pulse (from U4180D). The output of this gate is the operation request to the refresh arbitration circuit.

The operation request signal from U2160B is input to NOR gate U5180D to clock refresh arbitration flip-flops U3160A and U3170B. If no refresh request is present at U3160A (schematic 6D, upper right) the flip-flop will output a set condition when clocked. RAS1 and RAS2 will be output simultaneously. REFOP flip-flop U3160B will remain reset; no REFOP will be output. ROW is output at the same time as RAS1.

RAS1 is input to the delay line (DL2140) to begin the timing sequence. The RAM column address strobes, $\overline{\text{CAS1}}$ and $\overline{\text{CAS2}}$, are generated at U3120B and U3120C by the pulse from the 20 ns tap of the delay line. The pulse from the 140 ns tap is gated at U4170B with REFOP, Previous Cycle Ended, and the 200 ns tap to produce LATCH. LATCH appears 140 ns after RAS. In the write operation, LATCH is purely a timing pulse; in a read, however, LATCH strobes the data-out latches. The signal from the 200 ns tap is input to the gate producing LATCH to shut LATCH off. (LATCH lasts for 60 ns.) LATCH also causes U3180B to reset the refresh arbitration flip-flops and to reset $\overline{\text{HOLD}}$, allowing the emulator processor or System Processor to proceed. LATCH essentially ends the operation; RAS and CAS clocks are reset and the 100 ns recovery time pulse to complete the cycle is produced by the delay line.

The Previous Cycle Ended signal comes from latch U4180D to indicate that the cycle is running or that the cycle is completed. The latch is reset when OPREQ occurs; the end of the cycle is indicated by the falling edge of LATCH.

READ

The basic timing pulses for a read operation are the same as for a write operation. The differences for the read operation are noted here. Refer to Fig. 8-6.

For a read operation, bus R/\overline{W} line will be high, causing READ. As soon as \overline{OPREQ} is received, READ is gated with SELECT, Previous Cycle Ended, and the 100 ns recovery pulse at gate U2160B to produce the operation request. The request does not have to be delayed, as in the write cycle. Write Pulse (\overline{WRP}), Write Enable (\overline{WRT} EN), and WRITE are inactive. The request for a read cycle and the resultant timing are the same as for the write operation. In a read cycle, LATCH will strobe the data-out latches in addition to its timing responsibilities.

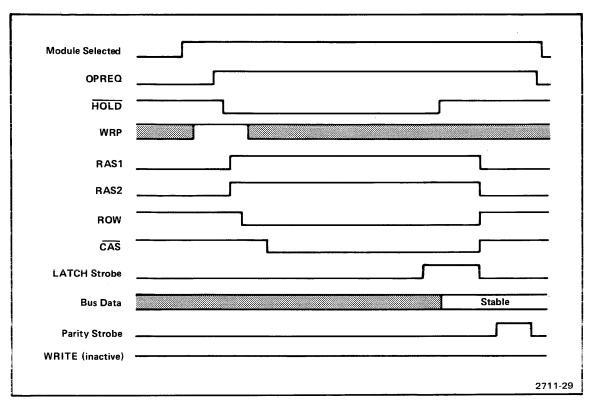


Fig. 8-6. High-Speed Memory Read Cycle.

Parity Strobe (PAR STR) is produced by U4170A (schematic 6D, center right) at the falling edge of LATCH. PAR STR clocks the parity error detector circuitry, enabling the circuit to check the validity of the data from RAM. PAR STR is the gated result of the ACTIVE, PROM, Previous Cycle Ended, and WRT EN signals, and indicates that the module is doing a read cycle.

If the module is being used as 8002A System Memory, the pulse from the 60 ns tap of the delay line is gated at U6120B with OPREQ, SELECT, and PROM to create PROM Chip Enable (PROM CE) when the PROM is addressed.

It should be noted here that when a reset is caused by LATCH at the end of an operation, only the refresh arbitration and timing control circuits are reset. Refresh request flip-flops are not reset, as resetting them could prevent a refresh from occurring. After a refresh operation the entire circuit is reset.

Reset Protection

A system reset should not disrupt data stored in memory. A problem arises when the front panel RESET switch is held in the reset position for too long. When this happens the module is not allowed to refresh and stored data decays. To overcome this problem, U7150, U4180 and U7180 (schematic 6D, lower left) are used as a reset protection circuit. This circuit prevents the reset from being carried to the memory module until the instant the reset switch is released. RESET will then be a pulse clocked by the System Clock.

Section 9

ASSEMBLER PROCESSOR MODULE

INTRODUCTION

The Assembler Processor utilizes a Z80 microprocessor to run the macro, assembler, and linker software of the 8002A μ Processor Lab System.

The Assembler Processor operates much like an emulator processor module. The Assembler Processor uses Program Memory to translate source input code (assembly language) to binary object code (machine language) for use by the emulator processor. The software that implements this translation is stored on the appropriate flexible disc for the emulator processor in use. The Assembler Processor operates as a slave to the System Processor, and is invoked when the ASM (Assemble) or LINK command is entered at the system console.

CIRCUIT DESCRIPTION

The functions of the Assembler Processor module can be divided into the following five areas:

- Control Byte Decoder and Latch
- Module Stop and Start
- Z80 Clock

@

- Address and Data Bus Buffers
- Control Signal Conversion

The following circuit descriptions refer to logic blocks as outlined on the schematics.

Control Byte Decoder and Latch



Two actions are required to enable the Assembler Processor for operation. First, the System Processor must write a command byte to the Assembler Processor I/O address E7. The write to E7 is detected by U5030 and U3030. When the write to E7 occurs, U3030 generates an enabling pulse called UPE7.

The second requirement for Assembler Processor operation is that the command byte must have bit 7 (the Active bit) asserted. The Assembler Processor module detects this bit and uses it to set up the J-K inputs of U5090.

The UPE7 signal clocks U5090, causing the ACTIVE line to go low. ACTIVE pulses the reset input of the Z80 microprocessor device. This reset causes the Z80 to go to address 0000 and begin execution.

Module Stop and Start $\langle 7 \rangle$

| F.P.HOLD (from the System Processor). |
|---|
| F.P. HOLD causes a wait condition during the OPREQ in which it occurs. SLV PAUSE stops the Z80 at the end of the current operation and activates BUSAQ. NAND gates U4100A and U4100D keep RESET from going inactive until BUSRQ is inactive. Z80 RESET is held high when the module is inactive. |
| Z80 Clock 7 The 10 MHz system clock is used to derive the clock for the Assembler Processor. A divide-by-four circuit (U4090) creates the 2.5 MHz clock used by the Z80. |
| Address and Data Bus Buffers 7 Data and address lines from the Assembler Processor Z80 microprocessor are fed to the respective buses by tristate buffers. The data transferred through these buffers is also inverted. |
| Data lines are buffered to the bus by U3060 and U4060. When the Z80 is reading, Z80 WRITE is low and data can only be transmitted from the bus to the Z80. When the Z80 is in the Write mode, Z80 WRITE is high, and data can only be transferred from the Z80 to the bus. In Write mode, the portion of the buffer that transfers data from the bus to the Z80 is set to the high-impedance state. |
| When the Assembler Processor is active, the Z80 address lines are buffered to the system address bus by inverter-buffers U4030, U5040, and part of U5050. The buffers are set to the high-impedance state by Z80 RUN when the module is not running. |
| Control Signal Conversion 7 The Z80 control signals of the Assembler Processor undergo conversion before being interfaced to the rest of the system. The signals are inverted by output buffers U5060 and part of U5050. These buffers are enabled by Z80 RUN when the Assembler Processor is running. The timing |

diagrams in Figs. 9-1 through 9-5 illustrate the control signal operation in the various modes of

operation. Table 9-1 lists these control signal conversions.

The Assembler Processor module may be halted and started by either of two bus signals from the

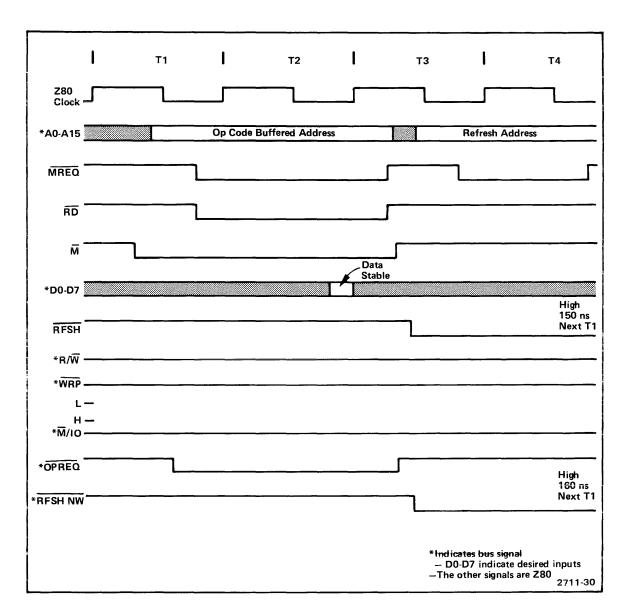


Fig. 9-1. Assembler Processor Operation Code Read Timing.

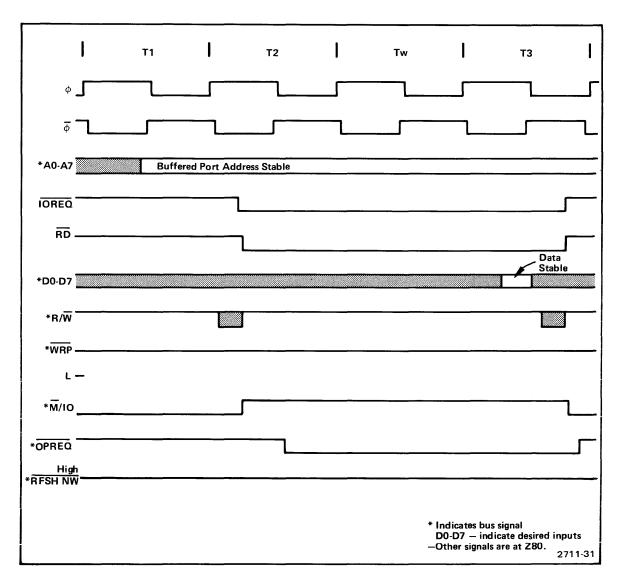


Fig. 9-2. Assembler Processor I/O Read Timing.

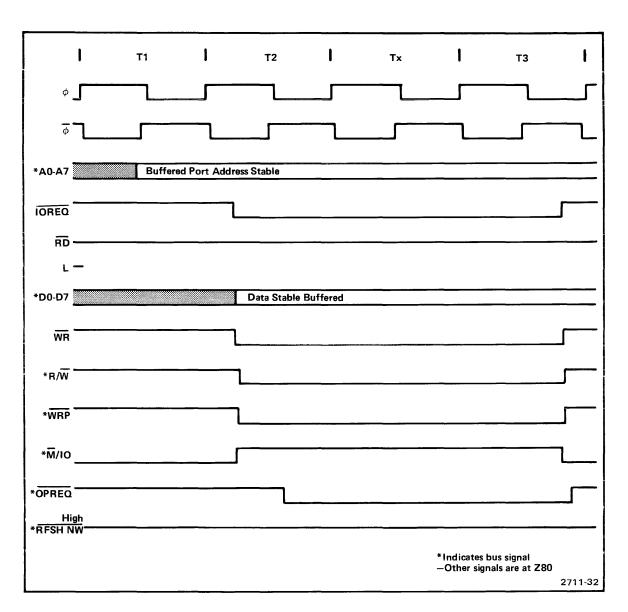


Fig. 9-3. Assembler Processor I/O Write Timing.

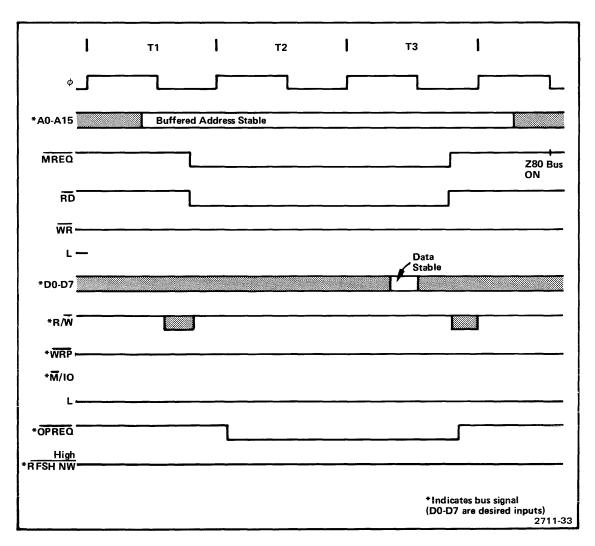


Fig. 9-4. Assembler Processor Memory Read Timing.

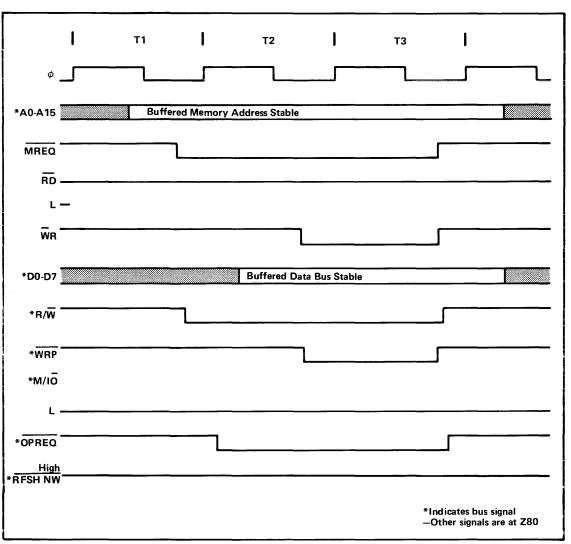


Fig. 9-5. Assembler Processor Memory Write Timing.

Table 9-1 CONTROL SIGNAL CONVERSION

| 8002A CONTROL SIGNALS | Z80 CONTROL SIGNALS |
|-----------------------|--|
| RUN | HALT |
| <mark>M</mark> ∕IO | ĪOREQ |
| R∕W | RD OR M1 (Further enabled when |
| | MREQ OR IOREQ is True) |
| FETCH | M1 |
| REFNW | RFSH |
| SLVOPREQ | MREQ OR IOREQ AND M1 |
| | $\overline{(MREQ} + \overline{IOREQ}) \cdot \overline{M1}$ |
| OPREQ | MREQ OR TOREQ AND M1 |

Refer to the Zilog Z80-CPU Technical Reference Manual for details on the Z80 control functions, timing, registers, and other characteristics.

For assembler operations or software details, refer to the 8002A μ Processor Lab System User's Manual and the 8002A μ Processor Lab Assembler & Emulator User's Manual that corresponds to your emulator processor.

9-8

Section 10 POWER SUPPLY

At this writing, the 8001/8002A μ Processor Lab +12 V and -12 V Power Supply module and the +5 V Power Supply module are serviced at the Tektronix Factory Service Center on an exchange basis.

See the Maintenance section (Section 11) for the proper procedure for removing the power supply modules from the mainframe.

Section 11

MAINTENANCE AND TROUBLESHOOTING

INTRODUCTION

This section describes procedures for preventing or reducing equipment malfunction, and includes techniques for troubleshooting and corrective maintenance. Preventive maintenance improves equipment reliability. Should the equipment fail to function properly, corrective measures should be taken immediately; otherwise, additional problems may develop within the equipment.



- 1. Minimize the handling of static-sensitive parts.
- 2. Transport and store static-sensitive parts in their original containers, on a metal rail, or on conductive foam. Label any container having a static-sensitive assembly or device.
- 3. Discharge the static charge on yourself by using a wrist strap before handling these devices. It is recommended that servicing of static sensitive assemblies or devices be performed only at a static-free work station by qualified personnel.
- 4. Nothing capable of generating or holding a static charge should be allowed on the work station surface.
- 5. Keep the leads shorted together whenever possible.
- 6. Pick up the part by the body, never by the leads.
- 7. Do not subject the part to sliding movements over any surface.
- 8. Avoid handling parts in areas having a floor or work surface covering that contributes to the generation of a static charge.
- 9. Use a soldering iron that has a connection to earth ground.
- 10. Use a special anti-static suction type desoldering tool, such as the Silverstat Soldapulit, or a wick type desoldering device.

REDUCTION OF SUSCEPTIBILITY TO STATIC DISCHARGE

The following safeguards have been provided within the $8001/8002A \mu$ Processor Lab systems to minimize susceptibility to static discharge:

- 1. The ground (earth) wire of the primary power cable is connected to the chassis where the cable enters the unit.
- 2. The shields of interconnecting EIA cables are grounded to the chassis at the cable entrance or egress of each unit.
- 3. All interconnecting ribbon cables have a built-in ground plane which is grounded to the chassis at the cable entrance or egress of each unit.

4. Ground loops have been avoided by installing a common ground between all units. Grounding straps are utilized where necessary. Refer to the 8001/8002A μ Processor Lab Installation Guide.



Violation or modification of the preceding safeguards can result in ground loops and/or static discharge problems.

PREVENTIVE MAINTENANCE

Preventive maintenance consists of cleaning, visual inspection, and performance check. The preventive maintenance schedule established for the equipment should be based on the amount of use, and on the environment in which the equipment is operated.

Cleaning

Clean the equipment often enough to prevent dust or dirt from accumulating in or on it. Dirt acts as a thermal insulating blanket and prevents efficient heat dissipation. It also provides high-resistance electrical leakage paths between conductors or components in a humid environment.

EXTERIOR

Clean the dust from the outside of the equipment by cleaning the surface with a soft cloth or brush. The brush will remove dust from around the front panel selector buttons. Hardened dirt may be removed with a cloth dampened in water that contains a mild detergent. Abrasive cleaners should not be used.

INTERIOR

Normally the interior of the equipment will not require cleaning unless it has been left uncovered for an extended period of time. Clean the interior by loosening accumulated dust with a dry soft brush, then blow the loosened dirt away with low-pressure air.

High-velocity air can damage some components. If the circuit board assemblies need cleaning, remove the circuit board and clean with a dry, soft brush. Hardened dirt or grease may be removed with a cotton-tipped applicator dampened with a solution of mild detergent and water. Do not leave detergent on critical memory components. Abrasive cleaners should not be used.

After cleaning, allow the interior to dry thoroughly before applying power to the equipment.

11-2



Do not allow water to get inside any enclosed assembly or components, such as switch assemblies, memory capacitors, potentiometers, etc. Instructions for removing assemblies for maintenance are provided in the Corrective Maintenance part of this section. Do not clean any plastic materials with organic cleaning solvents (such as benzene, toluene, xylene, acetone, or similar compounds); they may damage the plastic.

VISUAL INSPECTION

After cleaning, carefully check the equipment for such defects as defective connections and damaged parts. The remedy for most visible defects is obvious. If heat-damaged parts are discovered, try to determine the cause of overheating before replacing the damaged part; otherwise, the damage may be repeated.

TROUBLESHOOTING

Your Tektronix Service Support Center is best suited to perform repairs on this unit. However, the following general troubleshooting procedures may aid you in tracing a problem to its source.

Before beginning any troubleshooting work, check your warranty or service agreement. To prevent voiding the warranty, all service must be performed by Tektronix, Inc. for the first 90 days following delivery.

NOTE

Reliability is reduced if 8002A µProcessor Lab Program Memory modules are reconfigured for System Memory Operation, or vice-versa. Reliability will also be reduced with the 8001 or 8002A if Program Memory is made up of both High-Speed and 16K Dynamic RAM modules.

General

- 1. Check that all cabling is installed properly.
- 2. Verify performance of the system terminal.
- 3. Check that the Debug and Front Panel I/O module is in the correct slot (J9) of the motherboard.
- 4. After shutting off primary power to the μ Processor Lab, remove all modules from the motherboard. Clean each module's P1 edge connector with a cotton swab and isopropyl alcohol. Replace the modules.
- 5. If a duplicate set of modules is available, try swapping the modules, one by one, to find the defective one.
- 6. Check all power supply levels (usually accessible at the test points of each module).

Will Not Boot Up

- 1. If the system will not boot up, use another TEKDOS disc.
- 2. If, after boot up, the front panel indicator SYS does not come on, check the SYS indicator light and/or replace the Debug and Front Panel I/O module.

REV A OCT 1979 11-3

Emulation Problems

- 1. If the system does not function in emulation mode 1, check the clock input pins on the emulator processor to verify the presence and level of the prototype clock.
- 2. Check the prototype power supplies.
- 3. If mapped memory is being used in emulation mode 1, check that the System Communications module is plugged into the motherboard.
- 4. If the system fails in emulation modes 1 or 2, check that the signals that exist on the emulating microprocessor also exist at the prototype socket. If they do not, check the prototype control probe to find the problem.
- 5. If the MOVE, DUMP, or EXAMINE commands don't perform in prototype memory, place the emulator processor on an extender card and verify the operation of the prototype control probe data bus drivers during execution of each of these commands. Check the address and control line drivers, too.

PROM Programmer

 If the system won't read or write PROMs, check the power level on the PROM Programmer module.

Troubleshooting Aids DIAGRAMS

Circuit diagrams are given on foldout pages in the Diagrams section of the manual. The circuit number and electrical value of each component are shown on the diagram. (See the first tab page for definition of the reference symbology used to identify components in each circuit.) Components on circuit boards are assigned vertical and horizontal grid numbers which correspond to the location of the component on the circuit board. Refer to the Replaceable Electrical Parts List section for a complete description of each component and assembly. Those portions of the circuit that are on circuit boards are enclosed with a black border line, with the name and assembly number shown on the border.

NOTE

Corrections and modifications to the manual and equipment are described on inserts bound into the rear of the manual. Check this Change Information section for manual or instrument changes and corrections.

CIRCUIT BOARD ILLUSTRATIONS

Electrical components, connectors, and test points are identified on circuit board illustrations located on the inside fold of the corresponding circuit diagram or on the back of the preceding diagram. This allows cross-referencing between the diagram and the circuit board, and shows the physical location of components.

CAPACITOR MARKING

The capacitance value of common disc capacitors and some electrolytics is marked in microfarads on the side of the component body. The white ceramic capacitors are color-coded in picofarads. Tantalum capacitors are color-coded as shown in Fig. 11-1.

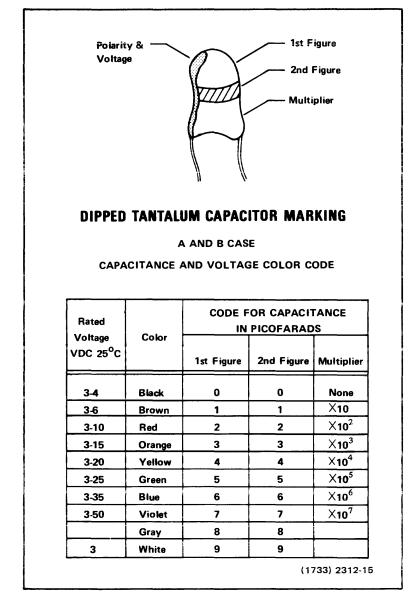


Fig. 11-1. Tantalum Capacitor Color Code.

DIODE CODE

The cathode of each glass-encased diode is indicated by a stripe, a series of stripes, or a dot. Some diodes have a diode symbol printed on one side. Figure 11-2 illustrates diode types and polarity markings that are used in this equipment.

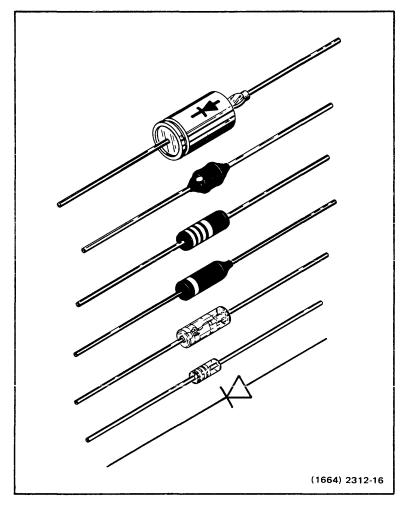


Fig. 11-2. Diode Polarity Marking.

11-6

TRANSISTOR AND INTEGRATED CIRCUIT PIN CONFIGURATION

Lead identification for the transistors is shown in Fig. 11-3. IC pin-out diagrams are shown, when necessary, on the back of the adjoining pullout schematic diagram.

DIODE CHECKS

Most diodes can be checked in the circuit by taking measurements across the diode and comparing these with voltages listed on the diagram. Forward-to-back resistance ratios can be taken by referring to the schematic and pulling appropriate transistors and pin connectors to remove low-resistance loops around the diode.

CAUTION

Do not use an ohmmeter scale with a high external current to check the diode junction.

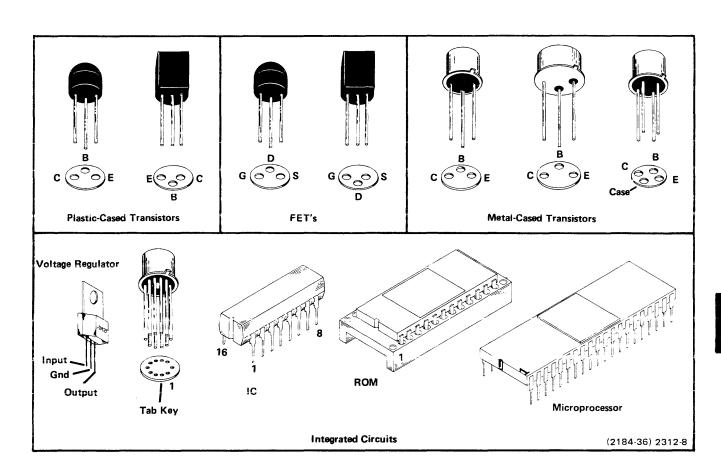


Fig. 11-3. Pin Configuration for Semiconductor Components.

INTEGRATED CIRCUIT (IC) CHECKS

When substitution is impossible, check input and output signal states, as described in the Circuit Description and on the diagrams. Lead configuration and data for the ICs used in this equipment are provided on the inside fold of the schematic or the back of the previous schematic.



To avoid possible damage from static charges, handle all ICs in accordance with the instructions at the beginning of this section.

CORRECTIVE MAINTENANCE

Corrective maintenance consists of component replacement and equipment repair. The following discussion describes special techniques and procedures required to replace components in this equipment.

Obtaining Replacement Parts

Most electrical and mechanical parts are available through your local Tektronix Field Office or representative. The Replaceable Electrical and Mechanical Parts List sections contain information on how to order these replacement parts. Many standard electronic components can be obtained locally in less time than required to order from Tektronix, Inc. It is best to duplicate the original component as closely as possible. Parts orientation and lead dress should be duplicated because orientation may affect circuit interaction.

If a component you have ordered has been replaced with a new or improved part, your local Field Office or representative will contact you concerning the change in the part number.

Parts Repair and Exchange Program

Tektronix service centers provide replacement or repair service on major assemblies, in addition to the unit itself. Contact your local service center for this service.

Soldering Technique



Disconnect the equipment from its power source before replacing or soldering components.

11-8

DISCRETE COMPONENT REPLACEMENT

Because it is easy to damage the plating in the board holes to which the component is soldered, it is recommended to cut the old component free and leave some lead length to solder the new component leads to. If the leads are pulled through the board, use caution when pulling them through the plated hole. Excessive heat or bent leads can damage the plating. Using a 15-watt pencil-type iron, straighten the leads on the back side of the board; then, when the solder melts, gently pull the soldered lead through the hole. A desoldering tool should be used to remove the old solder.

INTEGRATED CIRCUIT REPLACEMENT

Most of the ICs within this equipment are soldered into the module boards; therefore, extreme care must be taken to prevent damage to the module boards if the ICs are removed and replaced. The procedure used to remove ICs from the module boards is dependent upon: the cost of the IC, the competency of the technician accomplishing the repairs, and the degree of certainty that the IC is defective. One of the following procedures is recommended.

- 1. Inexpensive ICs or ICs that are known to be defective. Cut the defective IC from the board. Cut each pin close to the body of the IC, leaving as much of the pin as possible attached to the board. On the back side of the board use a 15-watt pencil-type soldering iron to melt the solder around the pins. When the solder melts, gently pull the pin out of the hole from the component side of the board. Repeat this procedure for each pin. A desoldering tool should be used to remove the old solder. Use caution when pulling the pins through the plated hole. Excessive heat or bent leads can damage the plating. When all pins have been removed and the holes are free of solder, install the new IC (ensure proper orientation of IC pin numbers). Solder each pin from the back side of the board and cut off excess pin length. Visually inspect the board for excess solder or solder bridges before testing the board's operation.
- 2. Expensive ICs or ICs that may be defective. On the back side of the board use a 15-watt pencil-type soldering iron to melt the solder around the pins. A desoldering tool should be used to remove the excess solder. Using needle-nose pliers, gently wiggle the pin in the hole while removing the solder. When the pin is free of solder in the hole, repeat the same procedure for each pin on the IC. When all pins are free, use an extracting tool and gently pull the IC from the board. Do not use force if the IC does not come free of the board. Use the soldering iron to remove excessive solder from the pin or pins at the same time the IC is being pulled from the board. When the IC is free of the board, carefully straighten each pin. If the IC is to be replaced or a new IC is to be installed, follow the same procedure as stated above for inexpensive ICs.

NOTE

An extracting tool to remove the ICs may be ordered from Tektronix, Inc. If an extracting tool is not available, use care to avoid damaging the pins. Pull slowly and evenly on both ends of the IC. Try to avoid having one end of the IC disengaged from the board before the other end.

Disassembly and Replacement of 8001/8002A µProcessor Lab Assemblies

The major assemblies of the 8001/8002A μ Processor Lab consist of front panel, back panel, motherboard, power supplies, and six or more module assemblies (printed circuit boards). Since the removal procedure for the power supplies requires almost a complete disassembly of the μ Processor Lab, it is the only disassembly procedure included.

NOTE

Power supply modules ($\pm 5.2\,$ Vdc, plus and minus 12 Vdc) are listed in the Replaceable Electrical Parts list as one part number for each power supply. Component part numbers are not furnished. Complete assembly replacement is recommended.

Both power supply modules are fastened together so if either is to be serviced or replaced, both modules must be removed from the equipment. Replacement or removal requires removing all the major assemblies except the front panel and motherboard assemblies. The following describes the disassembly and replacement procedure to service or replace the power supply modules.

1. Removal of Power Supply Modules

WARNING

Before the µProcessor Lab is disassembled make sure the primary power cord has been disconnected from the back panel.

- Remove the three screws located along each side of the top cover and lift the top cover off the mainframe.
- b. Disconnect connector P2 from the System Processor module. Remove connector and ribbon cable assembly from the unit. (Interconnecting cable to the Flexible Disc Unit.)
- c. Disconnect and remove all cable connectors to the Emulator Processor modules and the connectors that terminate on the back panel.

11-10 @

- d. Place the μ Processor Lab on a flat work surface, preferably a dolly so that direct access to all sides of the unit is possible.
- e. Remove all remaining connectors to the modules and remove all plug-in circuit board modules from the unit to prevent damage to the modules.



Depending on the 8001/8002A μ Processor Lab configuration there may be as many as nine cable assemblies with connectors that terminate at the modules and the other end terminating in either the front or back panel. When the connectors to the modules are disconnected and the modules removed, roll the cable assemblies up and secure them inside the mainframe to keep them from being damaged when the unit is turned on its side, top, or back.

f. Place the unit on its top, remove the four screws in the bottom cover then lift and place the cover aside. Set the unit back on its bottom or base.



Make sure the unit is placed on a flat surface to protect the bottom of the motherboard.

- g. Remove Data Acquisition Interface module (if installed) from the back panel—four screws. Set the module with its attached cable aside.
- h. Remove the left rear power supply cover by removing the two screws in front of the cover (through rear module positioning bracket) and the two screws through the back panel. Lift front of cover until it is clear of the module positioning bracket, then slide it forward until it clears J103 and can be removed. Replace screws in the cover to prevent their loss. (Longer screws go in front of the cover.)
- i. Remove right rear power supply cover by removing the three screws in front of the cover (through rear module positioning bracket) and the three screws through the back panel. From rear of unit, move cover to the right and lift with a slight clockwise motion until the cover is clear of the module positioning bracket and connector J100. It can now be removed. Replace screws in the cover to prevent their loss. (Longer screws go in front of the cover.)

j. Remove the back panel by removing the four screws holding the back panel to the mainframe. Then tilt top of the back panel away from the mainframe to gain access to TB2 and connectors P24 and J26. (Do not pull the cables that are still attached to the back panel.)

NOTE

When reassembling, do not tighten screws in Step 1 j until screws fastening covers in Steps 1h and 1i have been tightened.

k. Unsolder the chassis ground wire to TB2-3 on the back side of terminal block TB2. Remove terminal block TB2 from the back panel by removing the two machine screws and hex nuts. Pull terminal block away from back panel far enough so it can be turned and the end of the terminal block fed through the hole in the back panel.



The wires attached to the terminal block are long enough for removal; however, undue force should not be used when feeding the terminal block through the hole.

- I. Disconnect connectors P24 and J26. The back panel is now disconnected from the mainframe. Set the back panel aside.
- m. Place the unit on its right side. Remove three screws along the bottom of ± 5.2 Vdc power supply chassis. (Screws are through lower rear module positioning bracket.) Place the unit back on its base or bottom.
- n. Disconnect connector P22 from the motherboard and connector P23 on the main power switch cable assembly. Remove interlock switch S3 mounting plate from the mainframe.
- o. Disconnect all wire terminal lugs from terminal block TB1, on the motherboard.
- p. Remove the three screws (one has a hex nut) that secure each end of the power supply assembly to the sides of the mainframe.



Before removing the screws on the right side of the mainframe, place shimming material (approximately 3/8 inch) under the power transformer of the +5.2 Vdc power supply to prevent the power supplies from dropping when the screws in Step 1p are removed.

q. The power supply assemblies or modules can now be removed from the mainframe.



Feed connectors (P22 and P23) and wires from terminal block under the lower rear module positioning bracket as the power supplies are removed from the mainframe.

2. Separating Power Supply Modules

If only one of the power supply modules is defective, the two modules must be separated to replace the defective module. After the power supply modules have been removed from the mainframe, remove the four screws holding the two power supply modules together. Cut cable assembly lacing (cable ties) and separate the wires for each module.

3. Replacing Defective Plus and Minus 12 Vdc Power Supply



The following procedure requires unsoldering and removal of existing wires on the defective power supply and re-connecting and soldering these wires to the replacement power supply. Extreme care must be taken to make sure the existing wires are not damaged and the wires are re-connected to their correct terminals.

After separating the two modules, place the defective plus and minus 12 Vdc power supply module on its top and perform the following procedure:

a. Locate primary winding termination numbers 1 thru 4 (four terminations) on the power transformer. Cut the protective tubing over the wires and transformer terminals for these four terminations. Unsolder the four terminations and remove the wires. Make sure all wires are tagged as they are removed.

NOTE

Only the primary winding terminations are disconnected on the power transformer. The secondary windings in the power transformer for the plus and minus 12 Vdc power supply are connected internally within the power supply module.

Unsolder and remove the three dc volt output wires that terminate into stand-off terminals.
 Make sure all wires are tagged.

- c. The plus and minus 12 Vdc power supply module is now completely disconnected and can be removed.
- d. Before re-connecting the wires to the new module transformer terminals, slip heat-shrink tubing (or similar tubing) over the wires. Re-connect and solder the wires removed in Steps 3a and 3b. Apply heat to shrink tubing over the wires and terminals after they have been soldered to the terminals. Cover as much of the transformer connecting lugs as possible before shrinking the tubing.
- e. Utilize the mounting brackets from the defective power supply and reassemble both power supply modules.
- f. Using cable ties or equivalent, re-bundle the cable and tie the cables that were separated during the separation procedure for the two power supplies.
- 4. Replacing Defective +5.2 Vdc Power Supply



The following procedure requires unsoldering and removal of existing wires on the defective power supply and the re-connecting and soldering of these wires to the replacement power supply. Extreme care must be taken to make sure the existing wires are not damaged and that wires are re-connected to the correct terminals.

After separating the two modules, place the defective ± 5.2 Vdc power supply module on its top and perform the following procedure:

a. Locate primary winding termination numbers 1 through 4 (four terminations) on the power transformer and secondary winding termination numbers 20 through 26 (seven terminations). Cut protective tubing from the wires and transformer terminals for these 11 terminations. Unsolder all 11 terminations and remove the wires. Make sure all wires are tagged as they are removed.

NOTE

Only the primary and secondary winding terminations specified in Step 4a are disconnected on the power transformer. The remaining secondary windings on the power transformer for the ± 5.2 Vdc power supply are connected internally within the power supply module.

- b. Disconnect and remove all dc volt output wire terminal lugs (six terminal lugs) that terminate into stand-off terminals. Make sure all wires are tagged.
- c. The +5.2 Vdc power supply module is now completely disconnected.
- d. Before re-connecting the wires to the new module transformer terminals, slip heat-shrink tubing (or similar tubing) over the wires. Re-connect and solder the wires removed in Steps 4a and 4b. Apply heat to shrink the tubing over wires and terminals after they have been soldered to the terminals. Cover as much of the transformer connecting lugs as possible before shrinking the tubing.
- e. Utilize the mounting brackets from the defective power supply and reassemble both power supply modules.
- f. Using cable ties or equivalent, rebundle the cables and tie the cables that were separated during the separation procedure for the two power supplies.

5. Replacement of Power Supply Modules

To replace the power supply modules for the 8001/8002A μ Processor Lab unit, reverse the procedure for "Removal of Power Supply Modules".

CROSS INDEX—MFR. CODE NUMBER TO MANUFACTURER

| Mfr. Code | Manufacturer | Address | City, State, Zip |
|---------------|--|---|---------------------------|
| NO ENTRY | FOR 8 EP | | |
| 00779 | AMP, INC. | P O BOX 3608 | HARRISBURG, PA 17105 |
| 00853 | SANGAMO ELECTRIC CO., S. CAROLINA DIV. | P O BOX 128 | PICKENS, SC 29671 |
| 01121 | ALLEN-BRADLEY COMPANY | 1201 2ND STREET SOUTH | MILWAUKEE, WI 53204 |
| 01295 | TEXAS INSTRUMENTS, INC., SEMICONDUCTOR | P O BOX 5012, 13500 N CENTRAL | |
| | GROUP | EXPRESSWAY | DALLAS, TX 75222 |
| 01963 | CHERRY ELECTRICAL PRODUCTS CORPORATION | 3600 SUNSET AVENUE | WAUKEGAN, IL 60085 |
| 03508 | GENERAL ELECTRIC COMPANY, SEMI-CONDUCTOR | | · |
| | PRODUCTS DEPARTMENT | ELECTRONICS PARK | SYRACUSE, NY 13201 |
| 04009 | ARROW-HART, INC. | 103 HAWTHORNE STREET | HARTFORD, CT 06106 |
| 04713 | MOTOROLA, INC., SEMICONDUCTOR PROD. DIV. | 5005 E MCDOWELL RD, PO BOX 20923 | PHOENIX, AZ 85036 |
| 07263 | FAIRCHILD SEMICONDUCTOR, A DIV. OF | | |
| | FAIRCHILD CAMERA AND INSTRUMENT CORP. | 464 ELLIS STREET | MOUNTAIN VIEW, CA 94042 |
| 09023 | CORNELL-DUBILIER ELECTRONIC DIVISION | • | |
| | FEDERAL PACIFIC ELECTRIC CO. | 2652 DALRYMPLE ST. | SANFORD, NC 27330 |
| 09353 | C AND K COMPONENTS, INC. | 103 MORSE STREET | WATERTOWN, MA 02172 |
| 11236 | CTS OF BERNE, INC. | 406 PARR RD. | BERNE, IN 46711 |
| 11237 | CTS KEENE, INC. | 3230 RIVERSIDE AVE. | PASO ROBLES, CA 93446 |
| 14433 | ITT SEMICONDUCTORS | 3301 ELECTRONICS WAY | |
| | | P O BOX 3049 | WEST PALM BEACH, FL 33402 |
| 14552 | MICRO SEMICONDUCTOR CORP. | 2830 F FAIRVIEW ST. | SANTA ANA, CA 92704 |
| 18324 | SIGNETICS CORP. | 811 E. ARQUES | SUNNYVALE, CA 94086 |
| 24546 | CORNING GLASS WORKS, ELECTRONIC | | |
| | COMPONENTS DIVISION | 550 HIGH STREET | BRADFORD, PA 16701 |
| 27 014 | NATIONAL SEMICONDUCTOR CORP. | 2900 SEMICONDUCTOR DR. | SANTA CLARA, CA 95051 |
| 32997 | BOURNS, INC., TRIMPOT PRODUCTS DIV. | 1200 COLUMBIA AVE. | RIVERSIDE, CA 92507 |
| 33096 | COLORADO CRYSTAL CORPORATION | 2303 W 8TH STREET | LOVELAND, CO 80537 |
| 34335 | ADVANCED MICRO DEVICES | 901 THOMPSON PL. | SUNNYVALE, CA 94086 |
| 34649 | INTEL CORP. | 3065 BOWERS AVE. | SANTA CLARA, CA 95051 |
| 50522 | MONSANTO CO., ELECTRONIC SPECIAL | | |
| | PRODUCTS | 3400 HILLVIEW AVENUE | PALO ALTO, CA 94304 |
| 54473 | MATSUSHITA ELECTRIC, CORP. OF AMERICA | l PANASONIC WAY | SECAUCUS, NJ 07094 |
| 55680 | NICHICON/AMERICA/CORP. | 6435 N PROESEL AVENUE | CHICAGO, IL 60645 |
| 56289 | SPRAGUE ELECTRIC CO. | 87 MARSHALL ST. | NORTH ADAMS, MA 01247 |
| 56708 | ZILOG INC. | 14060 BUBB RD. | CUPERTINO, CA 95014 |
| 71400 | BUSSMAN MFG., DIVISION OF MCGRAW- | 0506 | GT 7 07770 NO 62107 |
| | EDISON CO. | 2536 W. UNIVERSITY ST. | ST. LOUIS, MO 63107 |
| 72982 | ERIE TECHNOLOGICAL PRODUCTS, INC. | 644 W. 12TH ST. | ERIE, PA 16512 |
| 75042 | TRW ELECTRONIC COMPONENTS, IRC FIXED | /01 xx PD04D GF | DULY ADDI DVII DA 10100 |
| 90000 | RESISTORS, PHILADELPHIA DIVISION | 401 N. BROAD ST. | PHILADELPHIA, PA 19108 |
| 80009 | TEKTRONIX, INC. | P O BOX 500 7-9 HASBROUCK LANE | BEAVERTON, OR 97077 |
| 82877 | ROTRON, INC. | , | WOODSTOCK, NY 12498 |
| 83003 | VARO, INC. | P O BOX 411, 2203 WALNUT STREET | GARLANU, TX /3040 |
| 91418 | RADIO MATERIALS COMPANY, DIV. OF P.R. | 1010 H PRVN MALIR | CUI CACO II 60646 |
| 01/07 | MALLORY AND COMPANY, INC. | 4242 W BRYN MAWR | CHICAGO, IL 60646 |
| 91637 | DALE ELECTRONICS, INC. | P. O. BOX 609 | COLUMBUS, NE 68601 |
| 97722 | PCA ELECTRONICS | 16799 SCHOENBORN ST. | SEPULVEDA, CA 91343 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | del No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|----------------------------|-------------------|-------------------|--|-------------|----------------------------|
| Al | 670-5300-00 | в010100 | B010102 | CKT BOARD ASSY:SYSTEM PROCESSOR | 80009 | 670-5300-00 |
| A1 | 670-5300-01 | B010103 | в050305 | (8001 ONLY) CKT BOARD ASSY:SYSTEM PROCESSOR (8001 ONLY) | 80009 | 670-5300-01 |
| A1 | 670-5300-03 | в050306 | в050346 | CKT BOARD ASSY: SYSTEM PROCESSOR (8001 ONLY) | 80009 | 670-5300-03 |
| Al | 670-5300-05 | B050347 | | CKT BOARD ASSY:SYSTEM PROCESSOR (8001 ONLY) | 80009 | 670-5300-05 |
| Al | 670-5300-00 | в010100 | в010340 | CKT BOARD ASSY:SYSTEM PROCESSOR (8002 ONLY) | 80009 | 670-5300-00 |
| Al | 670-5300-01 | в010341 | | CKT BOARD ASSY:SYSTEM PROCESSOR (8002 ONLY) | 80009 | 670-5300-01 |
| Al | 670-5300-01 | в032000 | в062396 | CKT BOARD ASSY:SYSTEM PROCESSOR (8002A ONLY) | 80009 | 670-5300-01 |
| Al | 670-5300-03 | B062397 | в073172 | CKT BOARD ASSY:SYSTEM PROCESSOR (8002A ONLY) | 80009 | 670-5300-03 |
| Al | 670-5300-05 | в073173 | в073533 | CKT BOARD ASSY:SYSTEM PROCESSOR (8002A ONLY) | 80009 | 670-5300-05 |
| Al | 670-5300-07 | в073534 | | CKT BOARD ASSY:SYSTEM PROCESSOR (8002A ONLY) | 80009 | 670-5300-07 |
| A5 | 670-5299-01 | | | CKT BOARD ASSY: DEBUG AND FRONT PANEL I/O | 80009 | |
| A10 A15 | 670-5220-00 670-5381-00 | | | CKT BOARD ASSY:ASSEMBLER PROCESSOR CKT BOARD ASSY:8001 SYSTEM MEMORY | | 670-5220-00 670-5381-00 |
| A20A1 | 670-5298-02 | | B025149X | | 80009 | |
| A20A1 | 670-5298-02 | в010100 | в020587Х | CKT BOARD ASSY:16K DYNAMIC RAM SYSTEM (8002 ONLY) | 80009 | 670-5298-02 |
| A20A2 | 670-5297-02 | | B073141 | CKT BOARD ASSY: SYSTEM MEMORY | 80009 | |
| A20A2 A25A1 | 670-5297-03 | | D0051/0 | CKT BOARD ASSY: SYSTEM MEMORY | 80009 | |
| AZ JAI | 670-5505-00 | вототоо | В025149 | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8001 ONLY) | 80009 | 670-5505-00 |
| A25A1 | 670-5505-01 | в025150 | в035151 | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8001 ONLY) | 80009 | 670-5505-01 |
| A25A1 | 670-5505-03 | в035152 | B045289 | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8001 ONLY) | 80009 | 670-5505-03 |
| A25A1 | 670-5505-06 | в045290 | в050299 | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8001 ONLY) | 80009 | 670-5505-06 |
| A25A1 | 670-5298-02 | в050300 | | CKT BOARD ASSY:16K DYNAMIC RAM SYSTEM (8001 ONLY) | 80009 | 670-5298-02 |
| A25A1 | 670-5505-03 | B015112 | B045293 | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8001 OPTION 45 ONLY) | 80009 | 670-5505-03 |
| A25A1 | 670-5505-06 | В045294 | в056028 | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8001 OPTION 45 ONLY) | 80009 | 670-5505-06 |
| A25A1 | 670-5298-02 | в056029 | | CKT BOARD ASSY:16K DYNAMIC RAM SYSTEM | 80009 | 670-5298-02 |
| A25A1 | 670-5505-03 | B015112 | B045292 | (8001 OPTION 45 ONLY) CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8001 OPTION 49 ONLY) | 80009 | 670-5505-03 |
| A25A1 | 670-5505-06 | в045293 | В056024 | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8001 OPTION 49 ONLY) | 80009 | 670-5505-06 |
| A25A1 | 670-5298-02 | в056025 | | CKT BOARD ASSY: 16K DYNAMIC RAM SYSTEM | 80009 | 670-5298-02 |
| A25A1 | 670-5505-01 | XB020588 | в030633 | (8001 OPTION 49 ONLY) CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM | 80009 | 670-5505-01 |
| A25Al | 670-5505-03 | в030634 | | (8002 ONLY) CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8002 ONLY) | 80009 | 670-5505-03 |

Replaceable Electrical Parts—8001/8002A Service

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|--|--|--------------------------------|--|----------------------------------|--|
| A25A1 | 670-5505-03 | | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM | 80009 | 670-5505-03 |
| A25A1 | 670-5505-06 | во52437 во72741 | (8002A ONLY) CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8002A ONLY) | 80009 | 670-5505-06 |
| A25A1 | 670-5298-02 | | CKT BOARD ASSY:16K DYNAMIC RAM SYSTEM (8002A ONLY) | 80009 | 670-5298-02 |
| A25A1 | 670-5505-03 | | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8002A OPTION 45 ONLY) | 80009 | 670-5505-03 |
| A25A1 | 670-5505-06 | | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8002A OPTION 45 ONLY) | 80009 | 670-5505-06 |
| A25A1 | 670-5298-02 | | CKT BOARD ASSY:16K DYNAMIC RAM SYSTEM (8002A OPTION 45 ONLY) | 80009 | 670-5298-02 |
| A25A1 | 670-5505-03 | во10100 во52438 | CKT BOARD ASSY:HIGH SPEED MEMORY PROGRAM (8002A OPTION 49 ONLY) | 80009 | 670-5505-03 |
| A25Al | 670-5505-06 | | CKT BOARD ASSY:HIGH PSEED MEMORY PROGRAM (8002A OPTION 49 ONLY) | 80009 | 670-5505-06 |
| A25A1 | 670-5298-02 | B064023 | CKT BOARD ASSY:16K DYNAMIC RAM SYSTEM (8002A OPTION 49 ONLY) | 80009 | 670-5298-02 |
| A25A2 A30 | 670-5659-01 670-5219-01 | | CKT BOARD ASSY:HIGH SPEED MEMORY CKT BOARD ASSY:SYSTEM COMMUNICATION | 80009 80009 | 670-5659-01 670-5219-01 |
| A30 | 670-5219-02 | | (8001 ONLY) CKT BOARD ASSY:SYSTEM COMMUNICATION (8001 ONLY) | 80009 | 670-5219-02 |
| A30 | 670-5219-04 | | CKT BOARD ASSY:SYSTEM COMMUNICATION (8001 ONLY) | 80009 | 670-5219-04 |
| A30 | 670-5219-05 | в050409 | CKT BOARD ASSY:SYSTEM COMMUNICATION (8001 ONLY) | 80009 | 670-5219-05 |
| A30 | 670-5219-01 | | CKT BOARD ASSY:SYSTEM COMMUNICATION (8002A ONLY) | 80009 | 670-5219-01 |
| A30 | 670-5219-02 | в062397 в072856 | CKT BOARD ASSY:SYSTEM COMMUNICATION (8002A ONLY) | 80009 | 670-5219-02 |
| A30 | 670-5219-04 | | CKT BOARD ASSY:SYSTEM COMMUNICATION (8002A ONLY) | 80009 | 670-5219-04 |
| A30 | 670 - 5219-05 | | CKT BOARD ASSY:SYSTEM COMMUNICATION (8002A ONLY) | 80009 | 670-5219-05 |
| A35 A40 | 670-5313-00 670-5378-01 | во10100 во50373 | CKT BOARD ASSY:MOTHER CKT BOARD ASSY:LOWER FRONT PANEL (8001 ONLY) | 80009 80009 | 670-5313-00 670-5378-01 |
| A40 | 670-5378-03 | в050374 | CKT BOARD ASSY: LOWER FRONT PANEL | 80009 | 670-5378-03 |
| A40 | 670-53/8-01 | B032000 B073306 | (8001 ONLY) CKT BOARD ASSY:LOWER FRONT PANEL (8002A ONLY) | 80009 | 670-5378-01 |
| A40 | 670-5378-03 | B073307 | CKT BOARD ASSY:LOWER FRONT PANEL (8002A ONLY) | 80009 | 670-5378-03 |
| A40A2 A45 A50 | 670-5225-00 118-0512-00 118-0513-00 | | CKT BOARD ASSY:PROM SOCKET CKT BOARD ASSY:HCC15-3 CKT BOARD ASSY:F5-25 | 80009 80009 80009 | 670-5225-00 118-0512-00 118-0513-00 |
| Al | | | CKT BOARD ASSY:SYSTEM PROCESSOR | | |
| C1013 C1049 C1085 C1105 C1119 C1126 | 283-0003-00 283-0003-00 283-0003-00 283-0003-00 283-0003-00 283-0003-00 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD.CER DI:0.01UF,+80-20%,150V CAP.,FXD.CER DI:0.01UF,+80-20%,150V CAP.,FXD.CER DI:0.01UF,+80-20%,150V | 72982 72982 72982 72982 | 855-558Z5U-103Z 855-558Z5U-103Z 855-558Z5U-103Z 855-558Z5U-103Z 855-558Z5U-103Z 855-558Z5U-103Z |

12-4

| | Taletuanice | Cariol/Mad | al No | | Mfr | |
|----------------|-------------------------------------|-------------------|----------|---|----------------|------------------------------------|
| Ckt No. | Tektronix Part No. | Serial/Mod Eff | Dscont | Name & Description | Code | Mfr Part Number |
| | | CII | DSCOIL | | | |
| C1129 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1161 C1162 | 290-0209-00 | | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V | 56289 56289 | 30D688 30D688 |
| C1162 C1163 | 290-0209-00 | | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V CAP.,FXD,ELCTLT:50UF,+75-10%,25V | 56289 | |
| C2039 | 290-0209-00 283-0003 - 00 | | | CAP., FXD. CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2041 | 283-0003-00 | | | CAP., FXD, CER DI:0.010F, +80-20%, 150V | | 855-558Z5U-103Z |
| 02011 | 203 0003 00 | | | om tyrab tom bitotoria, to acoupt of | , , , , , | 033 330030 1030 |
| C2069 | 283-0003-00 | | | CAP., FXD.CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C2119 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C2148 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C2162 | 283-0698-00 | B010100 | B050305X | CAP., FXD, MICA D: 390PF, 1%, 500V | 09023 | CD15ED391F03 |
| | | | | (8001 ONLY) | | |
| C2162 | 283-0698-00 | | B062396X | | 09023 | CD15ED391F03 |
| | | | | (8002A ONLY) | | |
| 02016 | 000 0610 00 | | | CAR TWO WEEK D 10DD 5% 100W | 00053 | D1 E1 01 00 D0 |
| C3046 | 283-0648-00 | | | CAP., FXD, MICA D:10PF, 5%, 100V | 00853 | |
| C3101 | 283-0003-00 | | | CAP., FXD. CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C3129 | 283-0003-00 | | | CAP., FXD.CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z 855-558Z5U-103Z |
| C3149 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C3173 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C4025 | 283-0003-00 | | | CAP., FXD. CER DI:0.01UF, +80-20%, 150V | 12902 | 633-336430-1034 |
| C4049 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C4049 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C4001 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4141 | 283-0003-00 | | | CAP., FXD, CER DI:0.010F, +80-20%, 150V | | 855-558Z5U-103Z |
| C4173 | 283-0003-00 | | | CAP., FXD.CER DI:0.010F, +80-20%, 150V | 72982 | |
| C4179 | 283-0648-00 | | | CAP., FXD.MICA D:10PF, 5%, 100V | 00853 | D151C100D0 |
| 04177 | 203 0040 00 | | | On ., Ind. iii on b. ioi i , 5%, ioo | 00033 | 2171010020 |
| C5035 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C5036 | 290-0209-00 | | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V | 56289 | 30D688 |
| C5066 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C5125 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C5172 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C7141 | 283-0330-00 | XB052189 | | CAP., FXD.CER DI:100PF, 5%, 50V | 72982 | 8111N068C0G0101J |
| | | | | | | |
| CR2152 | 152-0233-00 | | | SEMICOND DEVICE: SILICON, 85V, 100MA | 80009 | 152-0233-00 |
| CR2171 | 152-0233-00 | | B050305X | · · · · · · · · · · · · · · · · · · · | 80009 | 152-0233-00 |
| | | | | (8001 ONLY) | 00000 | 150 0033 00 |
| CR2171 | 152-0233-00 | | B062396X | SEMICOND DEVICE:SILICON,85V,100MA | 80009 | 152-0233-00 |
| | | | | (8002A ONLY) | | |
| R1015 | 315-0222-00 | | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R1013 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R1069 | 307-0598-00 | | | RES NTWK, FXD F1:7,330 OHM, 2%, 1.0W | | MSP08A01331G |
| R1007 | 307-0605-00 | | | RES NTWK, FXD F1:7,470 OHM, 2%, 0.15W | | CSP08G01-471G |
| R1079 | 307-0598-00 | | | RES NTWK, FXD F1:7,330 OHM, 2%,1.0W | 91637 | |
| R1081 | 307-0605-00 | | | RES NTWK, FXD FI:7,470 OHM, 2%, 0.15W | | CSP08G01-471G |
| 111001 | 307 0003 00 | | | 120 12111, 170 0111, 21, 30 020 | | |
| R1092 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R1093 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R1094 | 315-0101-00 | | | RES., FXD, CMPSN:100 OHM, 5%, 0.25W | 01121 | CB1015 |
| R1099 | 315-0101-00 | | | RES., FXD, CMPSN: 100 OHM, 5%, 0.25W | 01121 | CB1015 |
| R1119 | 315-0101-00 | | | RES., FXD, CMPSN: 100 OHM, 5%, 0.25W | 01121 | CB1015 |
| R1121 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| | | | | | 01101 | |
| R1128 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R1131 | 315-0621-00 | | | RES., FXD.CMPSN: 620 OHM, 5%, 0.25W | | CB6215 |
| R1132 | 315-0470-00 | | | RES., FXD, CMPSN: 47 OHM, 5%, 0.25W | 01121 | CB4705 |
| R1136 | 315-0153-00 | | | RES., FXD, CMPSN: 15K OHM, 5%, 0.25W | 01121 | |
| R1139 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R1141 | 315-0621-00 | | | RES., FXD, CMPSN: 620 OHM, 5%, 0.25W | 01121 | CB6215 |
| R1146 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R1146 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R1175 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| 11170 | 313 0222 00 | | | and the form of the country of the state of | ~ | |
| | | | | | | |

Replaceable Electrical Parts—8001/8002A Service

| | Taktroniy | Social/Mod | lal Na | | Mfr | |
|----------------|----------------------------|-------------------|----------|--|----------------|------------------------|
| Ckt No. | Tektronix Part No. | Serial/Mod Eff | Dscont | Name & Description | Code | Mfr Part Number |
| | | LII | DSCOIL | • | | |
| R1177 R1178 | 315-0222-00 | | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 01121 | |
| R1176 R2085 | 315-0222-00 315-0222-00 | | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | | CB2225 |
| R2091 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R2099 | 315-0471-00 | | | RES., FXD, CMPSN: 470 OHM, 5%, 0.25W | | CB4715 |
| R2133 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| | 313 0222 00 | | | 125,,112,012,011,011,011,011,011,011 | | |
| R2143 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R2152 | 315-0222-00 | | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R2171 | 321-0247-00 | B010100 | B050305X | RES., FXD, FILM: 3.65K OHM, 1%, 0.125W | 91637 | MFF1816G36500F |
| | | | | (8001 ONLY) | | |
| R2171 | 321-0247-00 | в032000 | B062396X | | 91637 | MFF1816G36500F |
| | | | | (8002A ONLY) | | |
| R2177 | 315-0222-00 | | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R3036 | 315-0821-00 | | | RES., FXD, CMPSN: 820 OHM, 5%, 0.25W | | CB8215 |
| R3039 | 315-0821-00 | | | RES., FXD, CMPSN:820 OHM, 5%, 0.25W | | CB8215 |
| R3041 | 315-0202-00 | | | RES., FXD, CMPSN: 2K OHM, 5%, 0.25W | | CB2025 |
| | | | | (8001 ONLY) | | |
| R3041 | 315-0202-00 | XB073173 | | RES., FXD, CMPSN: 2K OHM, 5%, 0.25W | 01121 | CB2025 |
| | | | | (8002A ONLY) | | |
| | | | | | | |
| R3055 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R3076 | 315-0471-00 | | | RES., FXD, CMPSN: 470 OHM, 5%, 0.25W | | CB4715 |
| R3091 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R3155 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R3171 R4121 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 MSP08A01222G |
| K4121 | 307-0596-00 | | | RES NTWK, FXD FI:7,2.2K OHM, 2%, 1.0W | 91037 | MSPUOAU1222G |
| R4129 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R4145 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R4165 | 315-0222-00 | | | RES., FXD, CMPSN:2.2K OHM, 5%, 0.25W | | CB2225 |
| R4171 | 315-0202-00 | | | RES., FXD, CMPSN: 2K OHM, 5%, 0.25W | 01121 | CB2025 |
| | | | | (8001 ONLY) | | |
| R4171 | 315-0202-00 | XB073173 | | RES., FXD.CMPSN: 2K OHM, 5%, 0.25W | 01121 | CB2025 |
| | | | | (8002A ONLY) | | |
| D/ 176 | 215 0471 00 | | | DEC. EVD CMDCN. / 70 OUM 5% 0 25H | 01121 | CB4715 |
| R4176 R5032 | 315-0471-00 | | | RES.,FXD,CMPSN:470 OHM,5%,0.25W RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | | CB2225 |
| R5055 | 315-0222-00 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R5071 | 315-0471-00 | | | RES., FXD, CMPSN: 470 OHM, 5%, 0.25W | | CB4715 |
| R5085 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R5101 | 315-0222-00 | | | RES., FXD, CMPSN:2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| | | | | | | |
| R5102 | 307-0596-00 | | | RES NTWK, FXD FI:7,2.2K OHM, 2%, 1.0W | | MSP08A01222G |
| R5104 | 307-0596-00 | | | RES NTWK, FXD FI:7,2.2K OHM, 2%, 1.0W | | MSP08A01222G |
| K5155 | 315-0222-00 | | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | |
| R5165 | 315-0821-00 | | | RES., FXD, CMPSN: 820 OHM, 5%, 0.25W | | CB8215 |
| R5172 | 315-0821-00 | | | RES., FXD, CMPSN: 820 OHM, 5%, 0.25W | 01121 | CB8215 |
| R7066 | 317-0301-00 | XB052189 | | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W | 01121 | вв3015 |
| R7067 | 317-0301-00 | VP052190 | | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W | 01121 | вв3015 |
| R7067 | 317-0301-00 | | | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W | 01121 | |
| R7069 | 317-0301-00 | | | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W | 01121 | |
| R7071 | 317-0301-00 | | | RES.,FXD.CMPSN:300 OHM,5%,0.125W | 01121 | BB3015 |
| R7079 | 317-0151-00 | | | RES., FXD, CMPSN: 150 OHM, 5%, 0.125W | 01121 | BB1515 |
| R7088 | 317-0750-00 | | | RES., FXD, CMPSN: 75 OHM, 5%, 0.125W | 01121 | BB7505 |
| | | | | | | |
| R7089 | 317-0301-00 | XB052189 | | RES., FXD. CMPSN: 300 OHM, 5%, 0.125W | 01121 | BB3015 |
| | | | | | 00770 | / O.F. 100 1 |
| S1141 | 118-0319-00 | | | SW, CODE IND WHL: THUMBWHEEL, 10POSN, 1 SECT | 00779 | 435-128-1 |
| 111010 | 156 0261 00 | | | MICDOCIDCULT DIVINITO A CVN DCOD VMTD | 80009 | 156-0361-00 |
| U1010 U1030 | 156-0361-00 156-0998-00 | | | MICROCIRCUIT, DI: UNIV A SYN RCVR XMTR MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U1040 | 156-0222-00 | | | MICROCIRCUIT, DI:HEX.LATCH | 80009 | 156-0222-00 |
| U1050 | 156-0998-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| 2.370 | | | | | | |

12-6 REV, JUN 1981

| | Tektronix | Serial/Mod | lel No. | | Mfr | |
|---------|-------------|--|---------|--|-------|-----------------|
| Ckt No. | Part No. | Eff | Dscont | Name & Description | Code | Mfr Part Number |
| U1060 | 156-1015-00 | ······································ | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U1080 | 156-0061-00 | | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| U1090 | 156-0061-00 | | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| U1100 | 156-0058-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U1110 | 156-0058-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U1120 | 156-0997-00 | | | MICROCKT, INTFC: DUAL COMM LINE DRIVER | 18324 | N8T15A |
| U1130 | 156-0995-00 | | | MICROCKT, INTFC: DUAL COMM LINE RCVR W/HYST | 80009 | 156-0995-00 |
| U1150 | 156-0043-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| U1160 | 156-0325-00 | | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA | 80009 | |
| U2030 | 156-0998-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | |
| U2040 | 156-0222-00 | | | MICROCIRCUIT, DI: HEX. LATCH | 80009 | |
| U2050 | 156-0998-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U2060 | 156-0998-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U2070 | 156-0998-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U2080 | 156-1015-00 | | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2090 | 156-0058-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | |
| U2100 | 156-0035-00 | | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| U2110 | 156-0061-00 | | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| U2120 | 156-0061-00 | | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| U2130 | 156-1015-00 | | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2140 | 156-1015-00 | | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2150 | 156-0462-00 | | | MICROCIRCUIT, DI: HEX SCHMITT TRIG, TTL | 80009 | 156-0462-00 |
| U2160 | 156-0058-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U2170 | 156-0043-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| U3010 | 156-0998-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U3020 | 156-0058-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U3040 | 156-0323-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U3050 | 156-0089-00 | | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U3060 | 156-0043-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| บ3070 | 156-0030-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U3080 | 156-0999-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U3090 | 156-0058-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U3100 | 156-0030-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U3110 | 156-1015-00 | | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3120 | 156-1015-00 | | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3130 | 156-1015-00 | | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3140 | 156-1015-00 | | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3150 | 156-0043-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | | 156-0043-00 |
| U3160 | 156-0030-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | | SN7400(N OR J) |
| บ3170 | 156-0030-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | |
| U4010 | 156-0986-00 | B010100 | в050305 | MICROCIRCUIT, DI: MICROPROCESSOR, 8 BIT (8001 ONLY) | 80009 | 156-0986-00 |
| U4010 | 156-0986-01 | в050306 | | MICROCIRCUIT, DI: MICROPROCESSOR, 8 BIT (8001 ONLY) | 80009 | 156-0986-01 |
| U4010 | 156-0986-00 | в032000 | в062396 | MICROCIRCUIT, DI: MICROPROCESSOR, 8 BIT | 80009 | 156-0986-00 |
| U4010 | 156-0986-01 | BU63302 | | (8002A ONLY) | 80000 | 156-0986-01 |
| 04010 | 156-0986-01 | в062397 | | MICROCIRCUIT, DI: MICROPROCESSOR, 8 BIT (8002A ONLY) | 80009 | 130-0380-01 |
| U4030 | 156-0998-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U4040 | 156-0999-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | | MC6888/MC8T98L |
| U4050 | 156-0999-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | · · |
| U4060 | 156-0996-00 | | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | |
| U4070 | 156-0996-00 | | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | |
| U4080 | 156-0999-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U4090 | 156-0999-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U4100 | 156-0219-00 | | | MICROCIRCUIT, DI:8-INPUT PRIORITY DCDR | 07263 | 9318DC |
| U4110 | 156-0219-00 | | | MICROCIRCUIT, DI:8-INPUT PRIORITY DCDR | 07263 | 9318DC |
| | | | | | | |

Replaceable Electrical Parts—8001/8002A Service

| | Tektronix | Serial/Model No. | | Mfr | |
|---------|-------------|------------------|---|-------|-----------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| U4120 | 156-0153-00 | | MICROCIRCUIT, DI: HEX INVERTER, BUFFER | 01295 | SN7406N |
| U4130 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U4140 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U4150 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U4160 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U4170 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| บ5030 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| บ5040 | 156-0999-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| บ5060 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ5070 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ5080 | 156-0222-00 | | MICROCIRCUIT, DI: HEX.LATCH | 80009 | 156-0222-00 |
| บ5090 | 156-0222-00 | | MICROCIRCUIT, DI: HEX.LATCH | 80009 | 156-0222-00 |
| บ5110 | 156-0222-00 | | MICROCIRCUIT, DI: HEX. LATCH | 80009 | 156-0222-00 |
| U5120 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U5130 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U5140 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| บ5150 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| บ5160 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| Y3033 | 158-0107-00 | | XTAL UNIT,QTZ:10MHZ,0.0015%SERIES | 80009 | 158-0107-00 |
| Y5173 | 158-0155-00 | | XTAL UNIT, QTZ:9.984MHZ,0.015%, PARALLEL | 33096 | PB-1167 |

12-8 REV, JUN 1981

| | Tektronix | Serial/Model No. | | Mfr | |
|---------|-------------|------------------|---|-------|-----------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| | | 211 2000111 | | | |
| A5 | | | CKT BOARD ASSY: DEBUG AND FRONT PANEL I/O | | |
| C1015 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1075 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C1098 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C1114 | 290-0209-00 | | CAP., FXD, ELCTLT:50UF, +75-10%, 25V | 56289 | |
| C1161 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C2025 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| | | | | | |
| C2075 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2091 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2095 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2161 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C3095 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C3115 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C3135 | 283-0003-00 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C3159 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4025 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4115 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4151 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C5019 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| 05017 | 203 0003 00 | | CAF:,FRD,CER DI:0.010F,+00-20%,190V | 12902 | 677-776270-1032 |
| C5025 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C5028 | 290-0209-00 | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V | 56289 | 30D688 |
| C5035 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C5089 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C5105 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C5166 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| | | | , , | | |
| .1085 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R1095 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | |
| R1115 | 307-0596-00 | | RES NTWK, FXD FI:7,2.2K OHM, 2%, 1.0W | | MSP08A01222G |
| R1135 | 307-0596-00 | | RES NTWK, FXD FI:7,2.2K OHM, 2%, 1.0W | 91637 | MSP08A01222G |
| R2015 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | |
| R2135 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R3155 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R4095 | 315-0681-00 | | RES.,FXD,CMPSN:680 OHM,5%,0.25W | 01121 | CB6815 |
| R5121 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | |
| R5135 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R5162 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| K3102 | 317 0222-00 | | RES., FAD, OHFSN. 2.2K OHF, 3%, 0.23W | 01121 | CBZZZJ |
| U1010 | 156-0035-00 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| U1020 | 156-0058-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U1030 | 156-0058-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U1040 | 156-0058-00 | | MICROCIRCUIT, DI: HEX.INVERTER | 80009 | 156-0058-00 |
| U1050 | 156-0998-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U1060 | 156-0998-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| 111070 | 156_0600 00 | | MICDOCIDOUTE DI ONAD 2 THE NOD CARE | 01205 | cn7/c02n |
| U1070 | 156-0690-00 | | MICROCIRCUIT, DI: QUAD 2-INP NOR GATE | 01295 | SN74S02N |
| U1080 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | |
| U1090 | 156-0030-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U1100 | 156-0043-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| U1110 | 156-0058-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U1120 | 156-0035-00 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| U1130 | 156-0058-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| υ1140 | 156-0030-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U1150 | 156-0030-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | |
| U1160 | 156-0030-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U2010 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2020 | 156-0058-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| | | | • | | - |
| U2030 | 156-0989-00 | | MICROCIRCUIT, DI:4 X 4 RGTR FILE W/3 STATE | 07263 | 74LS670PC OR DC |
| U2040 | 156-0990-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT EXCL OR GATE | 80009 | 156-0990-00 |
| | | | | | |

REPLACEABLE ELECTRICAL PARTS

PARTS ORDERING INFORMATION

Replacement parts are available from or through your local Tektronix, Inc. Field Office or representative.

Changes to Tektronix instruments are sometimes made to accommodate improved components as they become available, and to give you the benefit of the latest circuit improvements developed in our engineering department. It is therefore important, when ordering parts, to include the following information in your order: Part number, instrument type or number, serial number, and modification number if applicable.

If a part you have ordered has been replaced with a new or improved part, your local Tektronix, Inc. Field Office or representative will contact you concerning any change in part number.

Change information, if any, is located at the rear of this manual.

SPECIAL NOTES AND SYMBOLS

X000 Part first added at this serial number

00X Part removed after this serial number

ITEM NAME

In the Parts List, an Item Name is separated from the description by a colon (:). Because of space limitations, an Item Name may sometimes appear as incomplete. For further Item Name identification, the U.S. Federal Cataloging Handbook H6-1 can be utilized where possible.

ABBREVIATIONS

| ACTR | ACTUATOR | PLSTC | PLASTIC |
|--------|----------------------|----------|-----------------|
| ASSY | ASSEMBLY | QTZ | QUARTZ |
| CAP | CAPACITOR | RECP | RECEPTACLE |
| CER | CERAMIC | RES | RESISTOR |
| CKT | CIRCUIT | RF | RADIO FREQUENCY |
| COMP | COMPOSITION | SEL | SELECTED |
| CONN | CONNECTOR | SEMICOND | SEMICONDUCTOR |
| ELCTLT | ELECTROLYTIC | SENS | SENSITIVE |
| ELEC | ELECTRICAL | VAR | VARIABLE |
| INCAND | INCANDESCENT | WW | WIREWOUND |
| LED | LIGHT EMITTING DIODE | XFMR | TRANSFORMER |
| NONWIR | NON WIREWOUND | XTAL | CRYSTAL |

| | Tektronix | Serial/Model No. | | Mfr | |
|----------------|----------------------------|------------------|--|----------------|--------------------------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| U2050 | 156-0989-00 | | MICROCIRCUIT, DI:4 X 4 RGTR FILE W/3 STATE | 07263 | 74LS670PC OR DC |
| U2060 | 156-0996-00 | ı | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U2070 | 156-0323-00 | i e | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U2080 | 156-0030-00 | l | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | sn7400(n or J) |
| U2090 | 156-0222-00 | | MICROCIRCUIT, DI: HEX. LATCH | 80009 | 156-0222-00 |
| U2100 | 156-0219 - 00 | | MICROCIRCUIT, DI:8-INPUT PRIORITY DCDR | 07263 | 9318DC |
| U2110 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2120 | 156-1015-00 | 1 | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2130 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2140 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2150 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| υ2160 | 156-0058-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U3010 | 156-0125-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U3020 | 156-0222-00 | | MICROCIRCUIT, DI: HEX. LATCH | 80009 | 156-0222-00 |
| บ3030 บ3040 | 156-0989-00 156-0990-00 | | MICROCIRCUIT,DI:4 X 4 RGTR FILE W/3 STATE MICROCIRCUIT,DI:QUAD 2-INPUT EXCL OR GATE | 07263 80009 | 74LS670PC OR DC 156-0990-00 |
| U3050 | 156-0989-00 | | MICROCIRCUIT, DI:4 X 4 RGTR FILE W/3 STATE | 07263 | 74LS670PC OR DC |
| U3060 | 156-0996-00 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| | | | , , | 01005 | GN7/00(N OP 1) |
| U3070 | 156-0030-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE | 01295 80009 | SN7400(N OR J) 156-0990-00 |
| บ3080 บ3090 | 156-0990-00 156-0058-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT EXCL OR GATE MICROCIRCUIT, DI:HEX.INVERTER | 80009 | 156-0058-00 |
| U3100 | 156-0030-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U3110 | 156-0034-00 | | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 80009 | 156-0034-00 |
| U3120 | 156-0058-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| 112120 | 156 0000 00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U3130 U3140 | 156-0998-00 156-0043-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| U3150 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3160 | 156-0034-00 | | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 80009 | 156-0034-00 |
| U4010 | 156-0061-00 | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| U4020 | 156-0089-00 | 1 | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U4030 | 156-0089-00 |) | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U4040 | 156-0996-00 |) | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ4050 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4060 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | |
| U4070 | 156-0058-00 | | MICROCIRCUIT, DI:HEX.INVERTER | 80009 80009 | 156-0058-00 156-0034-00 |
| U4080 | 156-0034-00 |) | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 80009 | 136-0034-00 |
| U4090 | 156-1015-00 |) | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U4100 | 156-0030-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U4110 | 156-0690-00 | | MICROCIRCUIT, DI: QUAD 2-INP NOR GATE | 01295 | SN74S02N |
| U4120 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 156-1015-00 |
| U4130 U4140 | 156-1015-00 156-0043-00 | | MICROCIRCUIT,DI:DUAL J-K EDGE TRIG FF MICROCIRCUIT,DI:QUAD 2-INPUT POS NOR GATE | | 156-0043-00 |
| | | | • | | |
| U4150 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 80009 | 156-1015-00 156-1015-00 |
| U4160 U5010 | 156-1015-00 156-0125-00 | | MICROCIRCUIT,DI:DUAL J-K EDGE TRIG FF MICROCIRCUIT,DI:QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U5020 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U5030 | 156-0089-00 | | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| u 5040 | 156-0996-00 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5050 | 156-0996-00 |) | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5060 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5070 | 156-0058-00 |) | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U5080 | 156-0999-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| บ5090 | 156-0030-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U5100 | 156-1015-00 |) | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U5110 | 156-1015-00 | | MICROCIRCUIT, DI:DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U5120 | 156-0030-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE | 01295 80009 | SN7400(N OR J) 156-1015-00 |
| บ5130 บ5140 | 156-1015-00 156-0030-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U5150 | 156-0058-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0058-00 |
| U5160 | 156-0034-00 | | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 80009 | 156-0034-00 |
| | | | • | | |

12-10 REV, JUN 1981

Replaceable Electrical Parts—8001/8002A Service

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|--|--|--------------------------------|--|--|---|
| A10 | | | CKT BOARD ASSY:ASSEMBLER PROCESSOR | | |
| C3039 C3077 C3099 C5023 C5031 C5054 | 283-0003-00 283-0003-00 283-0003-00 290-0209-00 283-0003-00 283-0003-00 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD,ELCTLT:50UF,+75-10%,25V CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD,CER DI:0.01UF,+80-20%,150V | 72982 | |
| C5091 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| R3035 R3085 R3091 R4101 R5073 | 315-0102-00 315-0102-00 315-0331-00 315-0222-00 315-0222-00 156-0866-00 | | RES.,FXD,CMPSN:1K OHM,5%,0.25W RES.,FXD,CMPSN:1K OHM,5%,0.25W RES.,FXD,CMPSN:330 OHM,5%,0.25W RES.,FXD,CMPSN:2.2K OHM,5%,0.25W RES.,FXD,CMPSN:2.2K OHM,5%,0.25W MICROCIRCUIT,DI:13 INP NAND GATES | 01121 01121 01121 01121 01121 | CB1025 CB1025 CB3315 CB2225 CB2225 SN74LS133 |
| U3040 U3060 U3080 U3090 U3100 | 156-0983-00 156-0996-00 156-0382-00 156-1015-00 156-1015-00 | | MICROCIRCUIT, DI:MICROPROCESSOR EIGHT BIT MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE MICROCIRCUIT, DI:DUAL J-K EDGE TRIG FF MICROCIRCUIT, DI:DUAL J-K EDGE TRIG FF | 56708 18324 01295 80009 80009 | Z-80A 8T26AF SN74LS00(N OR J) 156-1015-00 |
| U4030 U4060 U4080 U4090 U4100 U5030 | 156-0999-00 156-0996-00 156-0383-00 156-1015-00 156-0382-00 156-0985-00 | | MICROCKT, INTFC:HIGH SPEED HEX 3-STATE INV MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE MICROCIRCUIT, DI:DUAL J-K EDGE TRIG FF MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE MICROCIRCUIT, DI:DUAL 5-INPUT NOR GATE | 04713 18324 80009 80009 01295 18324 | MC6888/MC8T98L 8T26AF 156-0383-00 156-1015-00 SN74LS00(N OR J) N74LS260AN OR J |
| U5040 U5050 U5060 U5080 U5090 U5100 | 156-0999-00 156-0999-00 156-0999-00 156-0385-00 156-1015-00 156-0385-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV MICROCIRCUIT, DI: HEX. INVERTER MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF MICROCIRCUIT, DI: HEX. INVERTER | 04713 04713 04713 80009 80009 80009 | MC6888/MC8T98L MC6888/MC8T98L MC6888/MC8T98L 156-0385-00 156-1015-00 156-0385-00 |

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|---|-------------------|------------------|
| A15 | | | CKT BOARD ASSY:8001 SYSTEM MEMORY | | |
| C1013 | 283-0128-00 | | CAP.,FXD,CER DI:100PF,5%,500V | 72982 | 871-536T2H101J |
| C1024 | 283-0111-00 | | CAP.,FXD,CER DI:0.1UF,20%,50V | | 8121-N088Z5U104M |
| C1055 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1074 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1098 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1125 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2012 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2023 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2033 | 290-0209-00 | | CAP., FXD.ELCTLT:50UF,+75-10%,25V | 56289 | |
| C2034 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2044 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | |
| C2053 | 290-0209-00 | | CAP., FXD. ELCTLT: 50UF, +75-10%, 25V | 56289 | 30D688 |
| C2054 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2074 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C2088 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2092 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C2109 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C3025 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C3044 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3064 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3074 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3084 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3094 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3104 | 283-0111-00 | | CAP.,FXD.CER DI:0.luF,20%,50V | 72982 | 8121-N088Z5U104M |
| C3112 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3114 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4011 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C5012 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C5025 | 290-0209-00 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V | 5628 9 | 30D688 |
| C5029 | 283-0111-00 | | CAP., FXD.CER DI:0.luf, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C5035 | 283-0111-00 | | CAP., FXD.CER DI:0.luf, 20%, 50V | | 8121-N088Z5U104M |
| C5075 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C5105 | 283-0111-00 | | CAP., FXD.CER DI:0.luf, 20%, 50V | 72982 | 8121-N088Z5U104M |
| R1012 | 321-0299-00 | | RES.,FXD,FILM:12.7K OHM,1%,0.125W | | MFF1816G12701F |
| R1038 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R1051 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R1067 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R1068 | 315-0562-00 | | RES., FXD, CMPSN: 5.6K OHM, 5%, 0.25W | | CB5625 |
| R2000 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R2024 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R2025 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R5032 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R5055 | 315-0562-00 | | RES., FXD, CMPSN: 5.6K OHM, 5%, 0.25W | | CB5625 |
| R5065 | 307-0595-00 | | RES NTWK, FXD F1:7,5.6K OHM, 2%,1.0W | | 4308R-101-562 |
| R5082 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R5112 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| U1010 | 156-0405-00 | | MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV | 07263 | 9602 (PC OR DC) |
| U1020 | 156-0386-00 | | MICROCIRCUIT, DI: TRIPLE 3-INPUT NAND GATE | 04713 | |
| U1030 | 156-0846-00 | | MICROCIRCUIT,LI:VOLTAGE REGULATOR | 04713 | |
| U1040 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U1050 | 156-0382-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74LS00(N OR J) |
| U1060 | 156-0382-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74LS00(N OR J) |
| | | | | | |

12-12 REV, JUN 1981

| | Tektronix | Serial/Mod | el No. | | Mfr | |
|----------------------|-------------|------------|---------|---|-------|------------------|
| Ckt No. | Part No. | Eff | Dscont | Name & Description | Code | Mfr Part Number |
| U1070 | 156-0291-00 | | | MICROCIRCUIT, DI: 1024 BIT X STATIC RAM | 27014 | 2102AN |
| U1080 | 156-0291-00 | | | MICROCIRCUIT, DI:1024 BIT X STATIC RAM | 27014 | |
| U1090 | 156-1028-00 | | | MICROCIRCUIT, DI:1024 X 4 STATIC RAM | 34649 | |
| U1100 | 156-1028-00 | | | MICROCIRCUIT, DI:1024 X 4 STATIC RAM | 34649 | |
| U1110 | 156-1028-00 | | | MICROCIRCUIT, DI:1024 X 4 STATIC RAM | 34649 | |
| U1120 | 156-1028-00 | | | · · | 34649 | 2114 |
| 01120 | 130-1028-00 | | | MICROCIRCUIT, DI:1024 X 4 STATIC RAM | 34049 | 2114 |
| U2010 | 156-0464-00 | | | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 07263 | 74LS20PC OR DC |
| U2020 | 156-0385-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| U2030 | 156-0382-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74LSOO(N OR J) |
| U2040 | 156-0990-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT EXCL OR GATE | 80009 | 156-0990-00 |
| U2050 | 156-0383-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NOR GATE | 80009 | 156-0383-00 |
| U2060 | 156-0999-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U2070 | 156-0391-00 | | | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR | 04713 | 74LS174(N OR J) |
| บ2080 | 156-0061-00 | | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| บ2090 | 156-0061-00 | | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| U2100 | 156-0061-00 | | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | |
| U2110 | 156-1084-00 | | | MICROCIRCUIT, DI:9 INPUT PARITY GEN/CHECKER | 18324 | N82S62(N OR F) |
| U2120 | 156-0383-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NOR GATE | 80009 | 156-0383-00 |
| บ3010 | 156-0061-00 | | | MICROCIRCUIT, DI:SGL, BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| U3020 | | | | (SEE LIST FOLLOWING U5120) | | |
| U3030 | 160-0008-01 | B010100 | B020209 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0008-01 |
| บ3030 | 160-0008-02 | B020210 | B050384 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0008-02 |
| U3030 | 160-0008-03 | в050385 | | MICROCIRCUIT, DI: 2048 X 8 CUSTOM MASK | 80009 | 160-0008-03 |
| บ3040 | 160-0009-01 | B010100 | в020209 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0009-01 |
| | | | | , | | |
| บ3040 | 160-0009-02 | B020210 | B040509 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0009-02 |
| บ3040 | 160-0009-04 | в040510 | | MICROCIRCUIT, DI: 2048 X 8 ROM, CUSTOM MASK | 80009 | 160-0009-03 |
| บ3050 | 160-0002-01 | в010100 | B020209 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0002-01 |
| บ3050 | 160-0002-02 | B020210 | B050384 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0002-02 |
| บ3050 | 160-0002-03 | в050385 | | MICROCIRCUIT, DI: 2048 X 8 ROM, CUSTOM MASK | 80009 | 160-0002-03 |
| บ3060 | 160-0006-01 | B010100 | B020209 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0006-01 |
| บ3060 | 160-0006-02 | в020210 | в050384 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0006-02 |
| บ3060 | 160-0006-03 | | | MICROCIRCUIT, DI: 2048 X 8 ROM, CUSTOM MASK | 80009 | 160-0006-03 |
| บ3070 | | 2030303 | | (SEE LIST FOLLOWING U5120) | | |
| U3080 | | | | (SEE LIST FOLLOWING U5120) | | |
| บ3090 | | | | (SEE LIST FOLLOWING U5120) | | |
| U3100 | | | | (SEE LIST FOLLOWING U5120) | | |
| U3110 | | | | | | |
| 03110 | | | | (SEE LIST FOLLOWING U5120) | | |
| U4010 | 156-0530-00 | | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| U4020 | | | | (SEE LIST FOLLOWING U5120) | | |
| U4030 | | | | (SEE LIST FOLLOWING U5120) | | |
| U4040 | 160-0007-01 | в010100 | B020209 | | 80009 | 160-0007-00 |
| U4040 | 160-0007-02 | B020210 | | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | | 160-0007-02 |
| U4040 | 160-0007-03 | в050385 | 2030301 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0007-03 |
| | | | | ,, | | |
| บ4050 | 160-0006-00 | в010100 | B020209 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0006-00 |
| U4050 | 160-0253-00 | B020210 | B050384 | MICROCIRCUIT, DI: 2048 X 8 E PROM PROGRAMMED | 80009 | 160-0253-00 |
| U4050 | 160-0253-01 | в050385 | | MICROCIRCUIT, DI: 2048 X 8 E ROM, CUSTOM MASK | 80009 | 160-0253-01 |
| U4060 | 160-0005-00 | в010100 | в020209 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0005-00 |
| U4060 | 160-0005-01 | B020210 | B050384 | MICROCIRCUIT, DI: 2048 X 8 E PROM, PROGRAMMED | 80009 | 160-0005-01 |
| U4060 | 160-0005-02 | в050385 | | MICROCIRCUIT, DI: 2048 X 8 E ROM, CUSTOM MASK | 80009 | 160-0005-02 |
| U4070 | | | | (SEE LIST FOLLOWING U5120) | | |
| U4080 | | | | (SEE LIST FOLLOWING U5120) | | |
| บ4090 | | | | (SEE LIST FOLLOWING U5120) | | |
| U4100 | | | | (SEE LIST FOLLOWING U5120) | | |
| U4110 | | | | (SEE LIST FOLLWOING U5120) | | |
| - · - - • | | | | The same same same same same same same sam | | |
| U5010 | 156-0530-00 | | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |

| Ckt No. | Tektronix Part No. | Serial/Model No Eff Dsc | nt Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|----------------------------|--|-------------|-----------------|
| บ5020 | 156-0530-00 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| บ5030 | 156-0385-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| U5040 | 156-0385-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| บ5050 | 156-0385-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| U5060 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5070 | 156-0996-00 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ5080 | 156-0866-00 | | MICROCIRCUIT, DI:13 INP NAND GATES | 04713 | SN74LS133 |
| U5090 | 156-0385-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| บ5100 | 156-0985-00 | | MICROCIRCUIT, DI: DUAL 5-INPUT NOR GATE | 18324 | N74LS260AN OR J |
| U5110 | 156-0464-00 | | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 07263 | 74LS20PC OR DC |
| U5120 | 156-0383-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NOR GATE | 80009 | 156-0383-00 |

THE FOLLOWING EPROM PART NUMBERS CAN BE INTERCHANGED WITH ANY OF THESE CKT NUMBERS:

 U3020
 U3090
 U4020
 U4080
 U4110

 U3070
 U3100
 U4030
 U4090
 U4100

 U3080
 U3110
 U4070
 U4100
 U4100

| 160-0003-00 | B010100 | B045140 | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0003-00 (8001 OPTION 01 ONLY) |
|-------------|----------|---------|--|
| 160-0003-01 | в045141 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0003-01 |
| 160-0252-00 | XB045141 | | (8001 OPTION 01 ONLY) MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0252-00 |
| 160-0004-01 | в015100 | B015112 | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0004-01 (8001 OPTION 02 ONLY) |
| 160-0004-02 | во15113 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0004-02 |
| | | | (8001 OPTION 02 ONLY) |
| 160-0251-00 | XB045141 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0251-00 |
| 160-0163-00 | в035100 | B045140 | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0163-00 (8001 OPTION 03 ONLY) |
| 160-0163-01 | B045141 | | MICROCIRCUIT,DI:2048 X 8 EPROM,PROGRAMMED 80009 160-0163-01 (8001 OPTION 03 ONLY) |
| | | | (COOT OFFICE OF ORDER) |
| 160-0164-00 | в035100 | B045140 | MICROCIRCUIT,DI:2048 X 8 EPROM,PROGRAMMED 80009 160-0164-00 (8001 OPTION 03 ONLY) |
| 160-0164-01 | B045141 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0164-01 |
| | | | (8001 OPTION 03 ONLY) |
| 160-0165-00 | в015100 | в015136 | MICROCIRCUIT,DI:2048 X 8 EPROM,PROGRAMMED 80009 160-0165-00 (8001 OPTION 05 ONLY) |
| | | | The state of the s |
| 160-0165-01 | в015137 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0165-01 |
| | | | (8001 OPTION 05 ONLY) |
| 160-0166-00 | в015100 | B015136 | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0166-00 (8001 OPTION 05 ONLY) |
| 160-0166-01 | B015137 | | MICROCIRCUIT,DI:2048 X 8 EPROM,PROGRAMMED 80009 160-0166-01 (8001 OPTION 05 ONLY) |
| | | | (OOO! OI!!OR OF ORE!) |
| 160-0167-00 | в015100 | B015110 | MICROCIRCUIT,DI:2048 X 8 EPROM,PROGRAMMED 80009 160-0167-00 (8001 OPTION 04 ONLY) |
| 160-0167-01 | в015111 | | MICROCIRCUIT, D1: 2048 X 8 EPROM, PROGRAMMED 80009 160-0167-01 |
| 160 0160 00 | 2015100 | 2015110 | (8001 OPTION 04 ONLY) |
| 160-0168-00 | В015100 | B015110 | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0168-00 (8001 OPTION 04 ONLY) |
| | | | |
| 160-0168-01 | B015111 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED 80009 160-0168-01 (8001 OPTION 04 ONLY) |
| | | | COOL OF THE ! |

12-14 REV, JUN 1981

Replaceable Electrical Parts—8001/8002A Service

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|--|-------------|-----------------|
| | 160-0314-00 | | MICROCIRCUIT, DI: 2048 X 8 ROM, CUSTOM MASK | 80009 | 160-0314-00 |
| | 160-0315-00 | | MICROCIRCUIT, DI: 2048 X 8 ROM, CUSTOM MASK | 80009 | 160-0315-00 |
| | 160-0462-00 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED | 80009 | 160-0462-00 |
| | 160-0463-00 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED | 80009 | 160-0463-00 |
| | 160-0760-00 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED | 80009 | 160-0760-00 |
| | 160-0761-00 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED | 80009 | 160-0761-00 |
| | 160-0763-00 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED | 80009 | 160-0763-00 |
| | 160-0764-00 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED | 80009 | 160-0764-00 |
| | 160-0765-00 | | MICROCIRCUIT, DI: 2048 X 8 EPROM, PROGRAMMED | 80009 | 160-0765-00 |

Replaceable Electrical Parts—8001/8002A Service

| 01.1.11 | Tektronix | Serial/Model No. | Name & Base is the | Mfr | Marin Doub November |
|----------------|----------------------------|------------------|--|---------|--------------------------------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| A20A1 | | | CKT BOARD ASSY:16K DYNAMIC RAM SYSTEM | | |
| C1001 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1012 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1024 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1031 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1035 C1044 | 283-0111-00 283-0111-00 | | CAP.,FXD,CER DI:0.1UF,20%,50V CAP.,FXD,CER DI:0.1UF,20%,50V | | 8121-N088Z5U104M 8121-N088Z5U104M |
| 61044 | 263-0111-00 | | CAP., FXD, CER DI: 0.10F, 20%, 30V | 12902 | 6121-N066230104M |
| C1051 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1065 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1071 C1084 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M 8121-N088Z5U104M |
| C1101 | 283-0111-00 283-0003-00 | | CAP.,FXD,CER DI:0.1UF,20%,50V CAP.,FXD,CER DI:0.01UF,+80-20%,150V | | 855-558Z5U-103Z |
| C11119 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| | | | | 70000 | 055 550557 1005 |
| C1135 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z 855-558Z5U-103Z |
| C1171 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2001 C2005 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2003 | 283-0111-00 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2011 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| 02023 | 203 0111 00 | | on the state of th | , 2, 52 | |
| C2031 | 283-0111-00 | ı | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2035 | 283-0111 - 00 | l . | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2045 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2051 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2065 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2071 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2075 | 283-0111-00 | l . | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2084 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2102 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2131 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2175 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C3001 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3005 | 283-0111-00 | ı | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3011 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3025 | 283-0111-00 | l | CAP.,FXD,CER DI:0.lUF,20%,50V | | 8121-N088Z5U104M |
| C3031 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3035 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3045 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3051 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3065 | 283-0111-00 | ı | CAP.,FXD,CER DI:0.1UF,20%,50V | | 8121-N088Z5U104M |
| C3071 | 283-0111-00 | ı | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3084 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3095 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3097 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C3111 | 283-0003-00 | ı | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C3118 | 283-0003-00 | ı | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C3125 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C3155 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C3171 | 283-0676-00 | | CAP., FXD, MICA D: 82PF, 1%, 500V | 00853 | D105E820F0 |
| C3173 | 283-0028-00 | | CAP., FXD, CER DI:0.0022UF, 20%, 50V | 56289 | 190606 |
| C4001 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4005 | 283-0111-00 | | CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C4006 | 283-0111-00 | i e | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4011 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4025 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4035 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |

12-16 REV, JUN 1981

| | Talakuania | Carried / Mandal Nie | | N 11 5 | |
|----------------|----------------------------|--------------------------------|--|----------------|--------------------------|
| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
| UNI NU. | rait No. | LII DSCUIII | Name & Description | Code | Will Fait Number |
| C4045 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4051 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C4065 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C4071 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C4075 C4084 | 283-0111-00 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| 04004 | 203-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 12902 | 8121-N088Z5U104M |
| C4116 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C4125 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4149 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4154 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4165 | 283-0003-00 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V | | 855-558Z5U-103Z |
| C5079 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C5169 | 290-0209-00 | | CAD EVD ELOTET. SOITE 175 10% 250 | 56290 | 2006.00 |
| C6004 | 283-0111-00 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V CAP.,FXD,CER DI:0.1UF,20%,50V | 56289 72982 | |
| C6006 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C6009 | 290-0209-00 | | CAP., FXD, ELCTLT:50UF, +75-10%, 25V | 56289 | |
| C6029 | 290-0209-00 | | CAP., FXD, ELCTLT:50UF, +75-10%, 25V | 56289 | |
| C6046 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| | | | | | |
| DL1140 | 119-0982-00 | | DELAY LINE, ELEC: 200NS, 100 OHM | 97722 | EP19828 |
| R1085 | 315-0510-00 | | DEC. TVD CAMON, E1 OUN EV O SELL | 01101 | ODE 1 OF |
| R1089 | 315-0510-00 315-0220-00 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W RES., FXD, CMPSN: 22 OHM, 5%, 0.25W | | CB5105 CB2205 |
| R1091 | 315-0220-00 | | RES., FXD, CMPSN:22 OHM, 5%, 0.25W | | CB2205 |
| R1092 | 315-0220-00 | | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W | 01121 | |
| R1093 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | | CB5105 |
| R1096 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W | 01121 | CB2205 |
| | | | | | |
| R1141 | 315-0101-00 | | RES., FXD, CMPSN:100 OHM, 5%, 0.25W | | CB1015 |
| R2085 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | | CB5105 |
| R2089 R2091 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | | CB5105 |
| R2091 | 315-0510-00 315-0510-00 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W RES.,FXD,CMPSN:51 OHM,5%,0.25W | | CB5105 CB5105 |
| R2101 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | | CB5105 |
| | 015 0510 00 | | (LEST, 1112, 0112 0111, 131, 10, 1251) | 01121 | 023103 |
| R2109 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R2111 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R2135 | 315-0101-00 | | RES.,FXD,CMPSN:100 OHM,5%,0.25W | | CB1015 |
| R2169 | 321-0335-00 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W | | MFF1816G30101F |
| R3085 | 315-0510-00 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W | | CB5105 |
| R3087 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R3165 | 321-0335-00 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W | 91637 | MFF1816G30101F |
| R4085 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | | CB5105 |
| R4097 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R4145 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R4171 | 307-0596-00 | | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W | 91637 | MSP08A01222G |
| R5085 | 315-0510-00 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W | 01121 | CB5105 |
| DEOGO | 215 0510 00 | | DEC. TWD COMON 51 OVER 5% O OFFI | 01101 | ODE 105 |
| R5089 R5165 | 315-0510-00 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R6006 | 315-0222-00 321-0291-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W RES.,FXD,FILM:10.5K OHM,1%,0.125W | 01121 91637 | CB2225 MFF1816G10501F |
| R6007 | 321-0291-00 | | RES.,FXD,FILM:10.5K OHM,1%,0.125W | 91637 | MFF1816G14001F |
| R6040 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R6155 | 315-0561-00 | | RES., FXD, CMPSN: 560 OHM, 5%, 0.25W | 01121 | CB5615 |
| | | | | | |
| R6159 | 315-0561-00 | | RES., FXD, CMPSN: 560 OHM, 5%, 0.25W | 01121 | CB5615 |
| R6165 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| c/142 | 118-0220 00 | | CUITCU CLIDE./ CDCT FOW AND 9/11 | 11227 | 206-4 |
| S4163 | 118-0320-00 | | SWITCH, SLIDE: 4 SPST, 50M AMP, 24V | 11237 | 206-4 |
| U1000 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1010 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1020 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| | | | | | |

| | | 0 1 1/84 1 1 1 1 | | | |
|----------------|----------------------------|------------------|---|----------------|--------------------------------|
| Old No | Tektronix | Serial/Model No. | Nama 9 Departation | Mfr | Mfr Dart Number |
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| U1030 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1040 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1050 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1060 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1070 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1080 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| | | | | | |
| U1090 | 156-0125-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U1100 | 156-0948-00 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U1110 | 156-0992-00 | | MICROCIRCUIT, DI:QUAD TTL-TO MOS DRIVER | 80009 | 156-0992-00 |
| U1120 U1130 | 156-0693-00 156-0323-00 | | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER | 01295 01295 | SN74S139N SN74S04N |
| U1140 | 156-0998-00 | | MICROCIRCUIT, DI:HEX. INVERTER MICROCKT, INTFC:HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| 01140 | 130 0330 00 | | HICKOCKI, INIFO. HIGH DIEED HER 3 DIAIE DER | 00007 | 130 0330 00 |
| U1150 | 156-0999-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U1160 | 156-0180-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74S00(N OR J) |
| U1170 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U2000 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2010 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2020 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| 112020 | 156 1000 00 | | MICHOGERAUTE DI. / OOC W 1 DWW. CO DW | 00000 | 156 1000 00 |
| U2030 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ2040 บ2050 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 80009 | 156-1000-00 156-1000-00 |
| U2060 | 156-1000-00 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2070 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2080 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| 02000 | 150 1000 00 | | monocinocii, bi. 4070 k i bimailo mai | 00007 | 130 1000 00 |
| U2090 | 156-0125-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U2100 | 156-0035-00 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| U2110 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2120 | 156-0180-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | sn74s00(n or j) |
| U2130 | 156-0125-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U2140 | 156-0043-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| 172150 | 156 0110 00 | | MICHOGERAUTH DIST W MAGNED GLAVIE BUID BLOD | 90000 | 154-0119-00 |
| U2150 U2160 | 156-0118-00 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP | 80009 01295 | 156-0118-00 cn74c00(N OP 1) |
| U2170 | 156-0180-00 156-0118-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE MICROCIRCUIT, DI:J-K MASTER-SLAVE FLIP-FLOP | 80009 | SN74S00(N OR J) 156-0118-00 |
| U3000 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3010 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3020 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| | | | • | | |
| U3030 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3040 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ3050 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3060 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3070 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3080 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3090 | 156-0325-00 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA | 80009 | 156-0325-00 |
| U3100 | 156-0325-00 | | MICROCIRCUIT, DI: DUAL 4-10-1 IN DATA MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U3110 | 156-1014-00 | | MICROCIRCUIT, DI: 9 BIT ODD/EVEN PTY GEN/CHK | 80009 | 156-1014-00 |
| U3120 | 156-0035-00 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| U3130 | 156-0462-00 | | MICROCIRCUIT, DI:HEX SCHMITT TRIG, TTL | 80009 | 156-0462-00 |
| U3140 | 156-1014-00 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK | 80009 | 156-1014-00 |
| | | | · | | |
| บ3150 | 156-0043-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| U3160 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3170 | 156-0405-00 | | MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV | 07263 | 9602 (PC OR DC) |
| U4000 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4010 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4020 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4030 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4040 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4050 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| | | | • | | |

12-18

Replaceable Electrical Parts—8001/8002A Service

| | Tektronix | Serial/Model No. | | Mfr | |
|---------|-------------|------------------|---|-------|-----------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| U4060 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4070 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ4080 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ4090 | 156-0325-00 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA | 80009 | 156-0325-00 |
| U4100 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U4110 | 156-0948-00 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U4120 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4130 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4140 | 156-0391-00 | | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR | 04713 | 74LS174(N OR J) |
| บ4150 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U4170 | 156-0043-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| บ5090 | 156-0325-00 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA | 80009 | 156-0325-00 |
| U5100 | 156-0125-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U5110 | 156-0948-00 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U5120 | 156-0996-00 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5130 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ5140 | 156-0391-00 | | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR | 04713 | 74LS174(N OR J) |
| บ5150 | 156-0990-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT EXCL OR GATE | 80009 | 156-0990-00 |
| U5160 | 156-0180-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74S00(N OR J) |
| U5170 | 156-0153-00 | | MICROCIRCUIT, DI: HEX INVERTER, BUFFER | 01295 | SN7406N |
| U6030 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74SO4N |
| U6040 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| VR6031 | 152-0243-00 | | SEMICOND DEVICE: ZENER, 0.4W, 15V, 5% | 14552 | 1 N 965B |

| Clet No | Tektronix | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|----------------------------|--------------------------------|--|-------------|--------------------------------------|
| Ckt No. | Part No. | EII DSCUIIL | Name & Description | Code | - Will Fait Number |
| A20A2 | | | CKT BOARD ASSY:SYSTEM MEMORY | | |
| C1001 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1012 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1024 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1031 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1035 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1044 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1051 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1065 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C1071 | 283-0111-00 | | CAP.,FXD,CER DI:0.1UF,20%,50V | | 8121-N088Z5U104M |
| C1084 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C1101 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C1119 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C1135 | 283-0003-00 | | CAP., FXD.CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1171 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C2001 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2005 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2003 | 283-0111-00 | | CAP., FXD, CER DI:0.10F, 20%, 50V | | 8121-N088Z5U104M |
| C2025 | 283-0111-00 283-0111-00 | | CAP., FXD, CER DI:0.10F, 20%, 50V | | 8121-N088Z5U104M |
| 62023 | 283-0111-00 | | CAP., FAD, CER DI:O. TOF, 20%, 30V | 72902 | 0121-N0002J0104FI |
| C2031 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2035 | 283-0111-00 | | CAP., FXD, CER DI:0.luF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2045 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2051 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2065 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2071 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2075 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2084 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C2102 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2131 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2175 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C3001 | 283-0111-00 | | CAP., FXD, CER DI:0.luf, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3005 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3011 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C3025 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3031 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C3035 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C3045 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| | | | | 78000 | 0101 0000=501045 |
| C3051 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3065 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M 8121-N088Z5U104M |
| C3071 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF,20%,50V | | |
| C3084 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C3095 C3097 | 283-0111-00 283-0003-00 | | CAP.,FXD,CER DI:0.1UF,20%,50V CAP.,FXD,CER DI:0.01UF,+80-20%,150V | | 8121-N088Z5U104M 855-558Z5U-103Z |
| 0,0,, | 203 0003 00 | | om tyrnbyour broader, to boxyrsot | , 2,02 | 033 330030 1000 |
| C3111 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C3118 | 283-0003-00 | | CAP., FXD.CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C3125 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C3155 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C3171 | 283-0676-00 | | CAP., FXD, MICA D:82PF, 1%, 500V | 00853 | D105E820F0 |
| C3173 | 283-0028-00 | | CAP., FXD, CER DI:0.0022UF, 20%, 50V | 56289 | 19C606 |
| C4001 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4005 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4006 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C4011 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C4025 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4035 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |

12-20 REV, JUN 1981

| | Tektronix | Serial/Model No. | | Mfr | |
|---------|-------------|------------------|---|-------|------------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| C4045 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4051 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C4065 | 283-0111-00 | | CAP., FXD, CER DI:0.10F, 20%, 50V | 72082 | 8121-N088Z5U104M |
| C4071 | 283-0111-00 | | CAP., FXD, CER DI:0.10F, 20%, 50V | | 8121-N088Z5U104M |
| C4075 | 283-0111-00 | | | | 8121-N088Z5U104M |
| C4073 | 283-0111-00 | | CAP., FXD.CER DI:0.1UF,20%,50V | 72982 | |
| C4064 | 263-0111-00 | | CAP.,FXD,CER DI:0.1UF,20%,50V | 12982 | 8121-N088Z5U104M |
| C4116 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4125 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4149 | 283-0003-00 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C4154 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C4165 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C5079 | 283-0111-00 | | CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C5169 | 290-0209-00 | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V | 56289 | 30D688 |
| C6004 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | | 8121-N088Z5U104M |
| C6006 | 283-0111-00 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | |
| C6009 | 290-0209-00 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V | 56289 | 30D688 |
| C6029 | 290-0209-00 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V | 56289 | 30D688 |
| C6046 | | | | | |
| 60040 | 283-0003-00 | | CAP.,FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| DL1140 | 119-0982-00 | | DELAY LINE, ELEC: 200NS, 100 OHM | 97722 | EP19828 |
| R1085 | 315-0510-00 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W | 01121 | CB5105 |
| R1089 | 315-0220-00 | | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W | 01121 | |
| R1091 | 315-0220-00 | | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W | | CB2205 |
| R1091 | | | | 01121 | |
| | 315-0220-00 | | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W | | |
| R1093 | 315-0510-00 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W | 01121 | |
| R1096 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W | 01121 | CB2205 |
| R1141 | 315-0101-00 | | RES., FXD, CMPSN: 100 OHM, 5%, 0.25W | 01121 | CB1015 |
| R2085 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R2091 | 315-0510-00 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R2096 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | |
| R2101 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | |
| R2109 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | | CB5105 |
| D0111 | 215 2222 22 | | | 01101 | anagar |
| R2111 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R2135 | 315-0101-00 | | RES., FXD, CMPSN: 100 OHM, 5%, 0.25W | | CB1015 |
| R2155 | 315-0222-00 | | RES.,FXD.CMPSN:2.2K OHM,5%,0.25W | | CB2225 |
| R2169 | 321-0335-00 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W | 91637 | |
| R3085 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R3089 | 315-0510-00 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W | 01121 | CB5105 |
| R3165 | 321-0335-00 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W | 91637 | MFF1816G30101F |
| R4085 | 315-0510-00 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W | | CB5105 |
| R4097 | 315-0510-00 | | RES., FXD. CMPSN: 51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R4171 | 307-0596-00 | | RES NTWK, FXD FI:7,2.2K OHM, 2%, 1.0W | 91637 | MSP08A01222G |
| R5085 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R5089 | 315-0510-00 | | | 01121 | CB5105 |
| K 7009 | 317-0710-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CBJ10J |
| R5165 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R6007 | 315-0681-00 | | RES.,FXD,CMPSN:680 OHM,5%,0.25W | 01121 | CB6815 |
| R6040 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R6155 | 315-0561-00 | | RES., FXD, CMPSN: 560 OHM, 5%, 0.25W | 01121 | CB5615 |
| R6159 | 315-0561-00 | | RES., FXD, CMPSN: 560 OHM, 5%, 0.25W | 01121 | CB5615 |
| R6165 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| S4163 | 118-0320-00 | | SWITCH, SLIDE: 4 SPST, 50M AMP, 24V | 11237 | 206-4 |
| U1000 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1010 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1020 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1030 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1040 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1050 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| 01070 | 1,0 1000 00 | | MOROGRADII, DI 17070 N I DIMMITO MAN | 50007 | 155 1000 00 |

| | Toktroniy | Serial/Model No. | | Mfr | |
|----------------|----------------------------|------------------|---|----------------|--------------------------------|
| Ckt No. | Tektronix Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| ORT NO. | | Lii Booont | Numb & Dood Tption | | - Tare Name of |
| U1060 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1070 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ1080 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U1090 | 156-0125-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U1100 | 156-0948-00 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U1110 | 156-0992-00 | | MICROCIRCUIT, DI: QUAD TTL-TO MOS DRIVER | 80009 | 156-0992-00 |
| U1120 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U1130 | 156-0998-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U1150 | 156-0999-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U1160 | 156-0180-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74S00(N OR J) |
| U1170 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U2000 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2010 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2020 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2030 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2040 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2050 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2060 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2070 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2080 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2090 | 156-0125-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U2100 | 156-0035-00 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| U2110 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U2120 | 156-0180-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74S00(N OR J) |
| 112120 | 156 0105 00 | | VIORAGERAUTE DE ANIDA E ENDUE VIII | 00000 | 156 0105 00 |
| U2130 | 156-0125-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U2140 U2150 | 156-0690-00 | | MICROCIRCUIT, DI: QUAD 2-INP NOR GATE | 01295 | SN74S02N |
| U2160 | 156-0118-00 156-0180-00 | | MICROCIRCUIT, DI:J-K MASTER-SLAVE FLIP-FLOP | 80009 01295 | 156-0118-00 SN74SOO(N OR J) |
| U2170 | 156-0118-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE MICROCIRCUIT, DI:J-K MASTER-SLAVE FLIP-FLOP | 80009 | 156-0118-00 |
| U3000 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| | | | • | | |
| U3010 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3020 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3030 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3040 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3050 | 156-1000-00 | | MICROCIRUCIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3060 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3070 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ3080 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3090 | 156-0325-00 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA | 80009 | 156-0325-00 |
| U3100 | 156-0089-00 | | MICROCIRCUIT, DI:4-BIT UP/DOWN DOUNTER | 80009 | 156-0089-00 |
| U3110 | 156-1014-00 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK | | 156-1014-00 |
| U3120 | 156-0035-00 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| U3130 | 156-0462-00 | | MICROCIRCUIT, DI: HEX SCHMITT TRIG, TTL | 80009 | 156-0462-00 |
| U3140 | 156-1014-00 | | MICROCIRCUIT, DI: 9 BIT ODD/EVEN PTY GEN/CHK | 80009 | 156-1014-00 |
| U3150 | 156-0690-00 | | MICROCIRCUIT, DI: QUAD 2-INP NOR GATE | 01295 | SN74S02N |
| U3160 | 156-1015-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3170 | 156-0405-00 | | MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV | 07263 | 9602 (PC OR DC) |
| U3090 | 156-0325-00 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA | 80009 | 156-0325-00 |
| U4000 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4010 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DINAMIC RAM | 80009 | 156-1000-00 |
| U4020 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4030 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4040 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4050 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| 114.04.0 | 156 1000 00 | | MICROGRAPHICATE DI 1000 H 1 PROPERZO DAM | 00000 | 156 1000 00 |
| U4060 | 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ4070 บ4080 | 156-1000-00 156-1000-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 80009 | 156-1000-00 156-1000-00 |
| 04000 | 170-1000-00 | | MICKOCIRCUII, DI. 4070 A I DIRARIO RAFI | 00007 | 150 1000 00 |

12-22 REV, JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|---|-------------|-----------------|
| U4090 | 156-0325-00 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA | 80009 | 156-0325-00 |
| U4100 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U4110 | 156-0948-00 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U4120 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4130 | 156-0996-00 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | |
| U4140 | 156-0222-00 | | MICROCIRCUIT, DI: HEX. LATCH | 80009 | 156-0222-00 |
| U4150 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U4170 | 156-0690-00 | | MICROCIRCUIT, DI: QUAD 2-INP NOR GATE | 01295 | SN74S02N |
| บ5090 | 156-0325-00 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA | 80009 | 156-0325-00 |
| U5100 | 156-0125-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX | 80009 | 156-0125-00 |
| U5110 | 156-0948-00 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U5120 | 156-0996-00 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5130 | 156-0996-00 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ5140 | 156-0222-00 | | MICROCIRCUIT, DI: HEX.LATCH | 80009 | 156-0222-00 |
| บ5150 | 156-0990-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT EXCL OR GATE | 80009 | 156-0990-00 |
| U5160 | 156-0180-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74S00(N OR J) |
| U5170 | 156-0153-00 | | MICROCIRCUIT, DI: HEX INVERTER, BUFFER | 01295 | SN7406N |
| U6010 | 160-0036-01 | | MICROCIRCUIT, DI:8 BIT WORD PROGRAMMED | 80009 | 160-0036-01 |
| U6030 | 156-0385-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| U6040 | 156-0323-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| VR6006 | 152-0195-00 | | SEMICOND DEVICE: ZENER, 0.4W, 5.1V, 5% | 04713 | SZ11755 |
| VR6031 | 152-0278-00 | | SEMICOND DEVICE: ZENER, 0.4W, 3V, 5% | 04713 | SZG35009K20 |

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|---|-------------|------------------|
| A25A1 | | | CKT BOARD ASSY: HIGH SPEED MEMORY PROGRAM | | |
| C1001 | 283-0111-00 | хв050300 | CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1001 | 283-0111-00 | XB056029 | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1001 | 283-0111-00 | хв056025 | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1001 | 283-0111-00 | XB072742 | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C1001 | 283-0111-00 | хв065056 | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C1001 | 283-0111-00 | XB064023 | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1012 | 283-0111-00 | хв050300 | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C1012 | 283-0111-00 | ХВ056029 | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C1012 | 283-0111-00 | XB056025 | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1012 | 283-0111-00 | XB072742 | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C1012 | 283-0111-00 | хв065056 | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1012 | 283-0111-00 | XB064023 | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.lUF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1024 | 283-0111-00 | хв050300 | CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1024 | 283-0111-00 | ХВ056029 | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1024 | 283-0111-00 | хв056025 | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1024 | 283-0111-00 | XB072742 | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1024 | 283-0111-00 | хв065056 | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1024 | 283-0111-00 | XB064023 | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1031 | 283-0111-00 | хв050300 | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1031 | 283-0111-00 | хв056029 | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1031 | 283-0111-00 | хв056025 | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.lUF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1031 | 283-0111-00 | ХВ072742 | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1031 | 283-0111-00 | хв065056 | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1031 | 283-0111-00 | XB064023 | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1035 | 283-0111-00 | хв050300 | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1035 | 283-0111-00 | хв056029 | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1035 | 283-0111-00 | XB056025 | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1035 | 283-0111-00 | ХВ072742 | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |

12-24 REV, JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|---|----------------|------------------|
| C1035 | 283-0111-00 | хв065056 | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1035 | 283-0111-00 | ХВ064023 | (8002A OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1044 | 283-0111-00 | хв050300 | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C1044 | 283-0111-00 | XB056029 | CAP., FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1044 | 283-0111-00 | Х В056025 | (8001 OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1044 | 283-0111-00 | XB072742 | (8001 OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C1044 | 283-0111-00 | ХВ065056 | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1044 | 283-0111-00 | хв064023 | (8002A OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1051 | 283-0111-00 | хв050300 | CAP., FXD.CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C1051 | 283-0111-00 | XB056029 | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1051 | 283-0111-00 | | (8001 OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1051 | 283-0111-00 | | CAP.,FXD.CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C1051 | 283-0111-00 | хв065056 | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1051 | 283-0111-00 | хв064023 | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1065 | 283-0111-00 | хв050300 | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C1065 | 283-0111-00 | хв056029 | CAP., FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1065 | 283-0111-00 | хв056025 | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1065 | 283-0111-00 | XB072742 | (8001 OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C1065 | 283-0111-00 | хв065056 | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C1065 | 283-0111-00 | XB064023 | (8002A OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V | 72 9 82 | 8121-N088Z5U104M |
| C1071 | 283-0111-00 | хв050300 | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C1071 | 283-0111-00 | XB056029 | CAP., FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1071 | 283-0111-00 | XB056025 | (8001 OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1071 | 283-0111-00 | XB072742 | (8001 OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C1071 | 283-0111-00 | XB065056 | CAP., FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1071 | 283-0111-00 | XB064023 | (8002A OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C1084 | 283-0111-00 | хв050300 | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C1084 | 283-0111-00 | хв056029 | CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|---|-------------|------------------|
| C1084 | 283-0111-00 | хв056025 | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1084 | 283-0111-00 | XB072742 | (8001 OFFICH 49 ONE) CAP.,FXD.CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C1084 | 283-0111-00 | хв065056 | CAP., FXD.CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C1084 | 283-0111-00 | XB064023 | CAP., FXD.CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C1101 | 283-0003-00 | хв050300 | CAP., FXD. CER DI:0.01UF, +80-20%, 150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C1101 | 283-0003-00 | хв056029 | CAP., FXD.CER DI:0.01UF,+80-20%,150V (8001/45 ONLY) | 72982 | 855-558Z5U-103Z |
| C1101 | 283-0003-00 | ХВ056025 | CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C1101 | 283-0003-00 | | CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C1101 | 283-0003-00 | | CAP., FXD.CER DI:0.01UF, +80-20%, 150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C1101 | 283-0003-00 | | CAP., FXD.CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1119 | 283-0003-00 | ХВ050300 | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1119 | 283-0003-00 | | (8001 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C1119 | 283-0003-00 | хв056025 | CAP., FXD.CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1119 | 283-0003-00 | XB072742 | (8001 OPTION 49 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1119 | 283-0003-00 | хв065056 | (8002A ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C1119 | 283-0003-00 | XB064023 | CAP., FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1135 | 283-0003-00 | хв050300 | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1135 | 283-0003-00 | хв056029 | (8001 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C1135 | 283-0003-00 | хв056025 | CAP., FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1135 | 283-0003-00 | ХВ072742 | (8001 OPTION 49 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1135 | 283-0003-00 | ХВ065056 | (8002A ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C1135 | 283-0003-00 | ХВ064023 | CAP., FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1171 | 283-0003-00 | | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1171 | 283-0003-00 | | (8001 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C1171 | 283-0003-00 | хв056025 | CAP., FXD.CER DI:0.01UF, +80-20%,150V | 72982 | 855-558Z5U-103Z |
| C1171 | 283-0003-00 | XB072742 | (8001 OPTION 49 ONLY) CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C1171 | 283-0003-00 | хв065056 | CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C1171 | 283-0003-00 | XB064023 | CAP.,FXD.CER DI:0.01UF,+80-20%,150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |

12-26 REV, JUN 1981

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|-------------------|---|-------------|------------------|
| C2001 | 283-0111-00 | XB050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2001 | 283-0111-00 | XB056029 | | (8001 ONLT) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2001 | 283-0111-00 | ХВ056025 | | CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2001 | 283-0111-00 | XB072742 | | CAP., FXD.CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C2001 | 283-0111-00 | хв065056 | | CAP., FXD.CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2001 | 283-0111-00 | хв064023 | | CAP., FXD.CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2005 | 283-0111-00 | хв050300 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2005 | 283-0111-00 | XB056029 | | (8001 ONLY) CAP., FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C2005 | 283-0111-00 | XB056025 | | (8001 OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2005 | 283-0111-00 | XB072742 | | CAP., FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C2005 | 283-0111-00 | XB065056 | | (8002A ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C2005 | 283-0111-00 | хв064023 | | (8002A OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2011 | 283-0111-00 | хв050300 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2011 | 283-0111-00 | хв056029 | | (8001 ONLY) CAP.,FXD.CER DI:0.lUF,20%,50V | 72982 | 8121-N088Z5U104M |
| C2011 | 283-0111-00 | хв056025 | | (8001 OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2011 | 283-0111-00 | VP0727/2 | | | 72002 | 9121_N09975U10/M |
| | | | | CAP., FXD.CER DI:0.1UF,20%,50V (8002A ONLY) | | 8121-N088Z5U104M |
| C2011 | 283-0111-00 | | | CAP.,FXD.CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | | 8121-N088Z5U104M |
| C2011 | 283-0111-00 | XB064023 | | CAP., FXD.CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2025 | 283-0023-00 | в010100 | в050299 | CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2025 | 283-0111-00 | в050300 | | CAP., FXD.CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2025 | 283-0111-00 | B015112 | в056028 | CAP., FXD.CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2025 | 283-0111-00 | в056029 | | CAP., FXD.CER DI:0.luf,20%,50V | 72982 | 8121-N088Z5U104M |
| C2025 | 283-0023-00 | в015112 | в056024 | (8001 OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C2025 | 283-0111-00 | в056025 | | (8001 OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2025 | 283-0023-00 | в032000 | B072741 | CAP., FXD.CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2025 | 283-0111-00 | в072742 | | (8002A ONLY) CAP., FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C2025 | 283-0023-00 | в010100 | в065055 | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C2025 | 283-0111-00 | в065056 | | (8002A OPTION 45 ONLY) CAP., FXD.CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------------|-----------------------|-------------------|------------------|---|-------------|------------------|
| C 2025 | 283-0023-00 | | в064022 | CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2025 | 283-0111-00 | B064023 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2031 | 283-0023-00 | | в050299 | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2031 | 283-0111-00 | | | CAP., FXD.CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2031 | 283-0023-00 | в015112 | в056028 | CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2031 | 283-0111-00 | в056029 | | CAP., FXD.CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2031 | 283-0023-00 | в015112 | в056024 | CAP., FXD.CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2031 | 283-0111-00 | | | CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2031 | 283-0023-00 | в032000 | в072741 | CAP., FXD.CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2031 | 283-0111-00 | | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2031 | 283-0023-00 | в010100 | в065055 | (8002A ONLY) CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2031 | 283-0111-00 | в065056 | | CAP., FXD.CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2031 | 283-0023-00 | | в064022 | CAP., FXD.CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2031 | 283-0111-00 | в064023 | | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2035 | 283-0023-00 | в010100 | в050299 | CAP., FXD.CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2035 | 283-0111-00 | | | CAP., FXD.CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2035 | 283-0023-00 | в015112 | в056028 | CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2035 | 283-0111-00 | в056029 | | CAP., FXD.CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2035 | 283-0023-00 | в015112 | в056024 | CAP., FXD.CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C2035 | 283-0111-00 | | | (8001 OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2035 | 283-0023-00 | в032000 | в072741 | CAP., FXD.CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2035 | 283-0111-00 | в072742 | | CAP., FXD.CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2035 | 283-0023-00 | | в065055 | (8002A ONLY) CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2035 | 283-0111-00 | | | CAP., FXD.CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2035 | 283-0023-00 | | B064022 | CAP., FXD.CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2035 | 283-0111-00 | B064023 | | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C2041 | 283-0023-00 | B010100 | в050299Х | (8002A OPTION 49 ONLY) CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2041 | 283-0023-00 | в015112 | B056028X | CAP., FXD.CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |

12-28 REV, JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|------------------|
| C2041 | 283-0023-00 | | в056024х | CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2041 | 283-0023-00 | | B072741X | (8001 OFFICE 49 ONL) CAP., FXD.CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2041 | 283-0023-00 | в010100 | в065055х | CAP., FXD.CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2041 | 283-0023-00 | в010100 | B064022X | CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2045 | 283-0111-00 | XB050300 | | (8001 ONLY) (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2045 | 283-0111-00 | хв056029 | | CAP., FXD.CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2045 | 283-0111-00 | XB056025 | | CAP.,FXD.CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2045 | 283-0111-00 | XB032000 | | (8002A ONLY) (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C2045 | 283-0111-00 | хв065056 | | CAP., FXD.CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2045 | 283-0111-00 | XB064023 | | CAP., FXD.CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2051 | 283-0023-00 | в010100 | в050299 | (8002A OFILON 49 ONLY) CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2051 | 283-0111-00 | в050300 | | CAP., FXD.CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2051 | 283-0023-00 | B015112 | в056028 | CAP., FXD.CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C2051 | 283-0111-00 | в056029 | | (8001 OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C2051 | 283-0023-00 | B015112 | в056024 | (8001 OPTION 45 ONLY) CAP.,FXD.CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2051 | 283-0111-00 | в056025 | | CAP., FXD.CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2051 | 283-0023-00 | в032000 | в072741 | (80024 ONLY) | 91418 | MX0104Z1205R5 |
| C2051 | 283-0111-00 | в072742 | | CAP., FXD.CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C2051 | 283-0023-00 | в010100 | в065055 | CAP., FXD.CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2051 | 283-0111-00 | в065056 | | CAP., FXD.CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2051 | 283-0023-00 | в010100 | B064022 | | 91418 | MX0104Z1205R5 |
| C2051 | 283-0111-00 | в064023 | | CAP., FXD.CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2055 | 283-0023-00 | в010100 | в050299х | (8001 ONLY) (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2055 | 283-0023 - 00 | в015112 | B056028X | CAP., FXD.CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2055 | 283-0023-00 | B015112 | B056024X | CAP., FXD.CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2055 | 283-0023-00 | в032000 | B072741X | CAP., FXD.CER DI:0.luf, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2055 | 283-0023-00 | в010100 | B065055X | CAP., FXD.CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2055 | 283-0023-00 | в010100 | B064022X | CAP., FXD.CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|------------------|
| C2061 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2061 | 283-0023-00 | B015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2061 | 283-0023-00 | в015112 | в056024х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2061 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2061 | 283-0023-00 | в010100 | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2061 | 283-0023-00 | в010100 | в064022Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2065 | 283-0111-00 | XB050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2065 | 283-0111-00 | | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2065 | 283-0111-00 | | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2065 | 283-0111-00 | хв032000 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2065 | 283-0111-00 | | | (8002A ONLY) CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2065 | 283-0111-00 | | | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.lUF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2071 | 283-0023-00 | | в050299 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2071 | 283-0111-00 | | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2071 | 283-0023-00 | в015112 | в056028 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2071 | 283-0111-00 | | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2071 | 283-0023-00 | B015112 | в056024 | (8001 OFTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OFTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2071 | 283-0111-00 | в056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2071 | 283-0023-00 | | B072741 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2071 | 283-0111-00 | | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C2071 | 283-0023-00 | в010100 | в065055 | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2071 | 283-0111-00 | | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2071 | 283-0023-00 | B010100 | B064022 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2071 | 283-0111-00 | | | (8002A OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2075 | 283-0023-00 | в010100 | в050299 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2075 | 283-0111-00 | | | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C2075 | 283-0023-00 | B015112 | B056028 | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2075 | 283-0111-00 | в056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |

12-30

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------------|-----------------------|-------------------|------------------|---|-------------|------------------|
| C2075 | 283-0023-00 | B015112 | в056024 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2075 | 283-0111-00 | в056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2075 | 283-0023-00 | в032000 | в072741 | CAP., FXD, CER DI:0.1UF, +80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2075 | 283-0111-00 | B072742 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C2075 | 283-0023-00 | в010100 | в065055 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2075 | 283-0111-00 | в065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2075 | 283-0023-00 | в010100 | в064022 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2075 | 283-0111-00 | в064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2081 | 283-0023-00 | в010100 | в050299Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2081 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2081 | 283-0023-00 | B015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2081 | 283-0023-00 | в032000 | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2081 | 283-0023-00 | в010100 | B065055X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2081 | 283-0023-00 | B010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2084 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2084 | 283-0111-00 | ХВ056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2084 | 283-0111-00 | хв056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2084 | 283-0111-00 | хв032000 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C2084 | 283-0111-00 | хв065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2084 | 283-0111-00 | XB064022 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2091 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2091 | 283-0023-00 | B015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2091 | 283-0023-00 | B015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2091 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2091 | 283-0023-00 | в010100 | в065055Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2091 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2095 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2 095 | 283-0023-00 | B015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | M fr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|---------------------|------------------|
| C2095 | 283-0023-00 | | B056024X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2095 | 283-0023-00 | | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2095 | 283-0023-00 | в010100 | в065055х | | 91418 | MX0104Z1205R5 |
| C2095 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.luf,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2101 | 283-0023-00 | | в050299х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2101 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2101 | 283-0023-00 | B015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2101 | 283-0023-00 | в032000 | B072741X | (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2101 | 283-0023-00 | B010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2101 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2101 | 283-0003-00 | хв050300 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C2102 | 283-0003-00 | ХВ056029 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C2102 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C2102 | 283-0003-00 | XB072742 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C2102 | 283-0003-00 | | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C2102 | 283-0003-00 | XB064023 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C2131 | 283-0003-00 | XB050300 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C2131 | 283-0003-00 | хв056029 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C2131 | 283-0003-00 | | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C2131 | 283-0003-00 | | | (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C2131 | 283-0003-00 | хв065056 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C2131 | 283-0003-00 | | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C2132 | 283-0023-00 | B010100 | в050299 | CAP.,FXD,CER DI:0.lUF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2132 | 283-0111-00 | | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C2132 | 283-0023-00 | B015112 | в056028 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2132 | 283-0111-00 | в056029 | | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2132 | 283-0023-00 | в015112 | в056024 | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2132 | 283-0111-00 | в056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |

12-32 REV, JUN 1981

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|------------------|---|-------------|------------------|
| C2132 | 283-0023-00 | в032000 | в072741 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C2132 | 283-0111-00 | в072742 | | (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C2132 | 283-0023-00 | в010100 | в065055 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2132 | 283-0111-00 | в065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C2132 | 283-0023-00 | в010100 | в064022 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2132 | 283-0111-00 | в064023 | | (8002A OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C2162 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C2162 | 283-0023-00 | B015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2162 | 283-0023-00 | в015112 | в056024Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C2162 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2162 | 283-0023-00 | в010100 | в065055х | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C2162 | 283-0023-00 | в010100 | B064022X | | 91418 | MX0104Z1205R5 |
| C2175 | 283-0003-00 | хв050300 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C2175 | 283-0003-00 | XB056029 | | (8001 ONLY) CAP.,FXD,CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C2175 | 283-0003-00 | хв056025 | | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C2175 | 283-0003-00 | XB072642 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C2175 | 283-0003-00 | хв065056 | | (8002A ONLY) CAP.,FXD,CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C2175 | 283-0003-00 | хв064203 | | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C3001 | 283-0111-00 | хв050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3001 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3001 | 283-0111-00 | хв056025 | | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3001 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3001 | 283-0111-00 | XB065056 | | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C3001 | 283-0111-00 | хв064023 | | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3005 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3005 | 283-0111-00 | хв056029 | | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C3005 | 283-0111-00 | хв056025 | | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3005 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|------------------|
| C3005 | 283-0111-00 | хв065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3005 | 283-0111-00 | хв064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3011 | 290-0209-00 | во10100 | в050299 | (8002A OPTION 49 ONLY) CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8001 ONLY) | 56289 | 30D688 |
| C3011 | 283-0111-00 | в050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3011 | 283-0023-00 | в015112 | в056028 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3011 | 283-0111-00 | в056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3011 | 283-0023-00 | в015112 | в056024 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3011 | 283-0111-00 | в056025 | | (8001 OFTION 49 ONLY) (8001 OFTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3011 | 283-0023-00 | в032000 | в072741 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3011 | 283-0111-00 | в072742 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C3011 | 283-0023-00 | в010100 | в065055 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3011 | 283-0111-00 | в065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3011 | 283-0023-00 | в010100 | в064022 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3011 | 283-0111-00 | в064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3025 | 283-0023-00 | в010100 | в050299 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3025 | 283-0111-00 | в050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3025 | 283-0023-00 | в015112 | в056028 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3025 | 283-0111-00 | в056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3025 | 283-0023-00 | в015112 | в056024 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3025 | 283-0111-00 | в056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3025 | 283-0023-00 | в032000 | в072741 | (8001 OPTION 49 ONLY) CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3025 | 283-0111-00 | в072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C3025 | 283-0023-00 | в010100 | в065055 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3025 | 283-0111-00 | в065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3025 | 283-0111-00 | в010100 | в064022 | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3025 | 283-0111-00 | в064023 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3031 | 283-0111-00 | XB050300 | | (8002A OPTION 49 ONLY) CAP., FXD, CER DT:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3031 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |

12-34 REV, JUN 1981

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|------------------|---|-------------|------------------|
| C3031 | 283-0111-00 | | | CAP., FXD, CER DI: 0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3031 | 283-0111-00 | | | (8001 OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C3031 | 283-0111-00 | хв065056 | | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3031 | 283-0111-00 | XB064023 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3035 | 283-0111-00 | XB050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3035 | 283-0111-00 | хв056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3035 | 283-0111-00 | XB056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3035 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C3035 | 283-0111-00 | хв065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3035 | 283-0111-00 | XB064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3041 | 283-0023-00 | в010100 | в050299х | (8002A OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C3041 | 283-0023-00 | в015112 | B056028X | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3041 | 283-0023-00 | B015112 | B056024X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3041 | 283-0023-00 | в032000 | B072741X | (8001 OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C3041 | 283-0023-00 | в010100 | в065055х | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3041 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3045 | 283-0023-00 | в010100 | в050299 | (8002A OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C3045 | 283-0111-00 | в050300 | | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3045 | 283-0023-00 | в015112 | в056028 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3045 | 283-0111-00 | в056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3045 | 283-0023-00 | в015112 | в056024 | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3045 | 283-0111-00 | в056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3045 | 283-0023-00 | в032000 | в072741 | (8001 OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C3045 | 283-0111-00 | в072742 | | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C3045 | 283-0023-00 | в010100 | в065055 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3045 | 283-0111-00 | в065056 | | (8002A OPTION 45 ONLY) CAP.,FXD,GER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C3045 | 283-0023-00 | в010100 | в064022 | (8002A OPTION 45 ONLY) CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3045 | 283-0111-00 | в064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |

| Ckt No. | | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------|-------------------|------------------|--|-------------|------------------|
| C3051 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3051 | 283-0111-00 | хв056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3051 | 283-0111-00 | хв056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3051 | 283-0111-00 | ХВО72742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C3051 | 283-0111-00 | хв065056 | | (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3051 | 283-0111-00 | XB064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3061 | 283-0023-00 | в010100 | в050299Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3061 | 283-0023-00 | в015112 | B056028X | | 91418 | MX0104Z1205R5 |
| C3061 | 283-0023-00 | в015112 | в056024х | | 91418 | MX0104Z1205R5 |
| C3061 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3061 | 283-0023-00 | в010100 | в065055Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3061 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3065 | 283-0023-00 | в010100 | в050299 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3065 | 283-0111-00 | в050300 | | (SOO1 ONLY) (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3065 | 283-0023-00 | в015112 | в056028 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3065 | 283-0111-00 | в056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3065 | 283-0023-00 | B015112 | в056024 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3065 | 283-0111-00 | в056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3065 | 283-0023-00 | в032000 | в072741 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3065 | 283-0111-00 | в072742 | | (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C3065 | 283-0023-00 | в010100 | в065055 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3065 | 283-0111-00 | в065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3065 | 283-0023-00 | в010100 | B064022 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3065 | 283-0111-00 | в064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3071 | 283-0111-00 | хв050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3071 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3071 | 283-0111-00 | хв056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3071 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |

12-36 @ JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|---|-------------|------------------|
| C3071 | 283-0111-00 | хв065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C3071 | 283-0111-00 | XB064023 | | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3081 | 283-0023-00 | в010100 | в050299х | | 91418 | MX0104Z1205R5 |
| C3081 | 283-0023-00 | в015112 | в056028х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3081 | 283-0023-00 | B015112 | B056024X | | 91418 | MX0104Z1205R5 |
| C3081 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3081 | 283-0023-00 | в010100 | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3081 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3084 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3084 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3084 | 283-0111-00 | хв056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3084 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C3084 | 283-0111-00 | хв065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3084 | 283-0111-00 | XB064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3085 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3085 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3085 | 283-0023-00 | в015112 | B056024X | | 91418 | MX0104Z1205R5 |
| C3085 | 283-0012-00 | в032000 | B072741X | | 72982 | 825-220-Z5U0104Z |
| C3085 | 283-0023-00 | в010100 | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3085 | 283-0023-00 | B010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3095 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C3095 | 283-0111-00 | XB056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3095 | 283-0111-00 | XB056025 | | (AP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3095 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C3095 | 283-0111-00 | хв065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C3095 | 283-0111-00 | хв064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C3097 | 283-0003-00 | хв050300 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C3097 | 283-0003-00 | хв056029 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|--------------------------|-------------------|------------------|--|-------------|----------------------------------|
| C3097 | 283-0003-00 | хв056025 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C3097 | 283-0003-00 | хв072742 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C3097 | 283-0003-00 | хв065056 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3097 | 283-0003-00 | хв064023 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C3101 | 283-0023-00 | в010100 | B050299X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3101 | 283-0023-00 | в015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3101 | 283-0023-00 | в015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3101 | 283-0023-00 | в032000 | B072741X | (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3101 | 283-0023-00 | в010100 | в065055Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3101 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3105 | 283-0023-00 | в010100 | B050299X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3105 | 283-0023-00 | в015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3105 | 283-0023-00 | в015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3105 | 283-0023-00 | в032000 | B072741X | (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3105 | 283-0023-00 | в010100 | B065055X | | 91418 | MX0104Z1205R5 |
| C3105 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3111 | 283-0003-00 | хв050300 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C3111 | 283 - 0003-00 | хв056029 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3111 | 283-0003-00 | хв056025 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 49 ONLY) | 72982 | 855-558z5U-103z |
| C3111 | 283-0003-00 | хв072742 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C3111 | 283-0003-00 | хв065056 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (80012A/45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3111 | 283-0003-00 | хв064023 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 49 ONLY) | 72982 | 855-558 z 5U-103 z |
| C3118 | 283-0003-00 | хв050300 | | (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C3118 | 283-0003-00 | хв056029 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3118 | 283-0003-00 | XB056025 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C3118 | 283-0003-00 | ХВ072742 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C3118 | 283-0003-00 | XB065056 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A /45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3118 | 283-0003-00 | XB064023 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------------|-----------------------|-------------------|-----------------|---|-------------|-----------------|
| C3125 | 283-0023-00 | в010100 | в050299 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3125 | 283-0003-00 | в050300 | | (8001 UNLT) CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONBLY) | 72982 | 855-558Z5U-103Z |
| C3125 | 283-0023-00 | в015112 | в056028 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3125 | 283-0003-00 | в056029 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3125 | 283-0023-00 | в015112 | в056024 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3125 | 283-0003-00 | в056025 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C3125 | 283-0023-00 | в032000 | в072741 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3125 | 283-0003-00 | в072742 | | (8002A ONLY) (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C3125 | 283-0023-00 | в010100 | в065055 | CAP., FXD, CER DI:0.luf, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3125 | 283-0003-00 | в065056 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3125 | 283-0023-00 | в010100 | B064022 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3125 | 283-0003-00 | в064023 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C3144 | 283-0023-00 | в010100 | в050299Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3144 | 283-0023-00 | в015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3144 | 283-0023-00 | в015112 | в056024х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3144 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3144 | 283-0023-00 | в010100 | в065055Х | (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3144 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3155 | 283-0003-00 | хв050300 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C3155 | 283-0003-00 | XB056029 | | (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3155 | 283-0003-00 | хв056025 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C3155 | 283-0003-00 | XB072742 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C3155 | 283-0003-00 | хв065056 | | (AP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C3155 | 283-0003-00 | хв064023 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C 3171 | 283-0676-00 | XB050300 | | CAP.,FXD,MICA D:82PF,1%,500V (8001 ONLY) | 00853 | D105E820F0 |
| C3171 | 283-0676-00 | XB056029 | | (8001 ONLIT) CAP.,FXD,MICA D:82PF,1%,500V (8001 OPTION 45 ONLY) | 00853 | D105E820F0 |
| C3171 | 283-0676-00 | хв056025 | | CAP., FXD, MICA D:82PF, 1%, 500V (8001 OPTION 49 ONLY) | 00853 | D105E820F0 |
| C3171 | 283-0676-00 | XB072742 | | CAP., FXD, MICA D:82PF, 1%, 500V (8002A ONLY) | 00853 | D105E820F0 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|------------------|
| C3171 | 283-0676-00 | хв065056 | | CAP., FXD, MICA D:82PF, 1%, 500V (8002A OPTION 45 ONLY) | 00853 | D105E820F0 |
| C3171 | 283-0676-00 | XB064023 | | CAP., FXD, MICA D:82PF, 1%, 500V | 00853 | D105E820F0 |
| C3173 | 283-0028-00 | хв050300 | | (8002A OPTION 49 ONLY) CAP.,FXD,CER DI:0.0022UF,20%,50V (8001 ONLY) | 56289 | 19C606 |
| C3173 | 283-0028-00 | хв056029 | | CAP.,FXD,CER DI:0.0022UF,20%,50V (8001 OPTION 45 ONLY) | 56289 | 190606 |
| C3173 | 283-0028-00 | хв056025 | | (8001 OFTION 45 ONLY) CAP.,FXD,CER DI:0.0022UF,20%,50V (8001 OFTION 49 ONLY) | 56289 | 19C606 |
| C3173 | 283-0028-00 | ХВ072742 | | CAP., FXD, CER DI:0.0022UF, 20%, 50V (8002A ONLY) | 56289 | 190606 |
| C3173 | 283-0028-00 | XB065056 | | CAP.,FXD,CER DI:0.0022UF,20%,50V (8002A OPTION 45 ONLY) | 56289 | 19C606 |
| C3173 | 283-0028-00 | XB064023 | | CAP., FXD, CER DI:0.0022UF, 20%, 50V (8002A OPTION 49 ONLY) | 56289 | 19C606 |
| C3189 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C3189 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C3189 | 283-0023-00 | в015112 | B056024X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C3189 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C3189 | 283-0023-00 | B010100 | B065055X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3189 | 283-0023-00 | в010100 | B064022X | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4001 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4001 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4001 | 283-0111-00 | XB056025 | | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4001 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4001 | 283-0111-00 | XB065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4001 | 283-0111-00 | XB064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4005 | 283-0111-00 | хв050300 | | (8002A OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4005 | 283-0111-00 | XB056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4005 | 283-0111-00 | XB056025 | | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4005 | 283-0111-00 | XB071742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4005 | 283-0111-00 | XB065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4005 | 283-0111-00 | XB064023 | | (8002A OPTION 45 ONLY) CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4006 | 283-0111-00 | хв050300 | | (8002A OPTION 49 ONLY) CAP.,FXD,CER DI:0.lUF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4006 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|-------------------|--|-------------|------------------|
| C4006 | 283-0111-00 | XB056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4006 | 283-0111-00 | XB072742 | | (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4006 | 283-0111-00 | хв065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A /45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4006 | 283-0111-00 | XB064023 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4011 | 283-0111-00 | XB050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4011 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4011 | 283-0111-00 | XB056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4011 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4011 | 283-0111-00 | хв065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4011 | 283-0111-00 | XB064023 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4025 | 283-0111-00 | XB050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4025 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4025 | 283-0111-00 | хв056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4025 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4025 | 283-0111-00 | хв065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4025 | 283-0111-00 | XB064023 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0023-00 | в010100 | в050299 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C4031 | 283-0111-00 | в050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0023-00 | B015112 | в056028 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4031 | 283-0111-00 | в056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0111-00 | в015112 | в056024 | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0111-00 | в056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0023-00 | в032000 | в072741 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C4031 | 283-0111-00 | В072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0023-00 | B010100 | в065055 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4031 | 283-0111-00 | в065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4031 | 283-0023-00 | в010100 | в064022 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002/4A/49 ONLY) | 91418 | MX0104Z1205R5 |
| C4031 | 283-0111-00 | в064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | M fr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|---|---------------------|------------------|
| C4035 | 283-0023-00 | в010100 | в050299 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C4035 | 283-0111-00 | в050300 | | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C4035 | 283-0023-00 | в015112 | в056028 | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4035 | 283-0111-00 | в056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4035 | 283-0023-00 | B015112 | в056024 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4035 | 283-0111-00 | в056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4035 | 283-0023-00 | в032000 | в072741 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C4035 | 283-0111-00 | в072742 | | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C4035 | 283-0023-00 | в010100 | в065055 | (8002A ONLY) CAP.,FXD,CER DI:0.lUF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4035 | 283-0111-00 | в065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4035 | 283-0023-00 | в010100 | в064022 | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C4035 | 283-0111-00 | в064023 | | (8002A OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4045 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4045 | 283-0111-00 | XB056029 | | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C4045 | 283-0111-00 | хв056025 | | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4045 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4045 | 283-0111-00 | XB065056 | | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C4045 | 283-0111-00 | XB064023 | | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.lUF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4051 | 283-0023-00 | в010100 | в050299 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C4051 | 283-0111-00 | в050300 | | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C4051 | 283-0023-00 | в015112 | в056028 | (8001 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4051 | 283-0111-00 | в056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V | 72982 | 8121-N088Z5U104M |
| C4051 | 283-0023-00 | B015112 | в056024 | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C4051 | 283-0111-00 | в056025 | | (8001 OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4051 | 283-0023-00 | в032000 | B072741 | CAP., FXD, CER DI: 0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C4051 | 283-0111-00 | B072742 | | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,20%,50V | 72982 | 8121-N088Z5U104M |
| C4051 | 283-0023-00 | в010100 | в065055 | (8002A ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4051 | 283-0111-00 | в065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|------------------|--|-------------|------------------|
| C4051 | 283-0023-00 | в010100 | в064022 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4051 | 283-0111-00 | в064023 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4055 | 283-0023-00 | в010100 | в050299Х | | 91418 | MX0104Z1205R5 |
| C4055 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4055 | 283-0023-00 | в015112 | B056024X | | 91418 | MX0104Z1205R5 |
| C4055 | 283-0023-00 | в032000 | B072741X | | 91418 | MX0104Z1205R5 |
| C4055 | 283-0023-00 | в010100 | B065055X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4055 | 283-0023-00 | в010100 | B064022X | | 91418 | MX0104Z1205R5 |
| C4065 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4065 | 283-0111-00 | хв056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4065 | 283-0111-00 | хв056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4065 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4065 | 283-0111-00 | хв065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4065 | 283-0111-00 | хв064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4071 | 283-0023-00 | в010100 | в050299 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C4071 | 283-0111-00 | в050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4071 | 283-0023-00 | в015112 | в056028 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4071 | 283-0111-00 | в056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4071 | 283-0023-00 | в015112 | в056024 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4071 | 283-0111-00 | в056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4071 | 283-0023-00 | в032000 | B072741 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C4071 | 283-0111-00 | в072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4071 | 283-0023-00 | в010100 | в065055 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4071 | 283-0111-00 | в065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4071 | 283-0023-00 | в010100 | B064022 | CAP.,FXD,CER DI:0.lUF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4071 | 283-0111-00 | в064023 | | CAP., FXD, CER DI:0.luf, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4075 | 283-0023-00 | в010100 | в050299 | CAP., FXD, CER DI:0.luf, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C4075 | 283-0111-00 | в050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|------------------|
| C4075 | 283-0023-00 | в015112 | в056028 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4075 | 283-0111-00 | в056029 | | (8001 OFTION 45 ONLY) (8001 OFTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4075 | 283-0023-00 | в015112 | в056024 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4075 | 283-0111-00 | в056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4075 | 283-0023-00 | в032000 | в072741 | (8002A ONLY) | 91418 | MX0104Z1205R5 |
| c4075 | 283-0111-00 | B072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4075 | 283-0023-00 | в010100 | в065055 | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4075 | 283-0111-00 | в065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4075 | 283-0023-00 | в010100 | в064022 | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4075 | 283-0111-00 | в064023 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4084 | 283-0111-00 | хв050300 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C4084 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4084 | 283-0111-00 | хв056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4084 | 283-0111-00 | XB072742 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C4084 | 283-0111-00 | хв065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C4084 | 283-0111-00 | ХВ064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C4091 | 283-0023-00 | B010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C4091 | 283-0023-00 | B015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4091 | 283-0023-00 | B015112 | в056024Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4091 | 283-0023-00 | в032000 | в072741х | (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C4091 | 283-0023-00 | в010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4091 | 283-0023-00 | B010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4095 | 283-0023-00 | в010100 | в050299Х | | 91418 | MX0104Z1205R5 |
| C4095 | 283-0023-00 | B015112 | в056028Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4095 | 283-0023-00 | B015112 | B056024X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4095 | 283-0023-00 | в032000 | в072741Х | (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C4095 | 283-0023-00 | в010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4095 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|---|-------------|-----------------|
| C4116 | 283-0003-00 | хв050300 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C4116 | 283-0003-00 | ХВ056029 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C4116 | 283-0003-00 | XB056025 | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4116 | 283-0003-00 | XB072742 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C4116 | 283-0003-00 | хв065056 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C4116 | 283-0003-00 | XB064023 | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4125 | 283-0003-00 | хв050300 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C4125 | 283-0003-00 | XB056029 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C4125 | 283-0003-00 | XB056025 | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4125 | 283-0003-00 | XB072742 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C4125 | 283-0003-00 | хв065056 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C4125 | 283-0003-00 | XB064023 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4149 | 283-0003-00 | хв050300 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C4149 | 283-0003-00 | хв056029 | (8001 ONL) CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C4149 | 283-0003-00 | XB056025 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4149 | 283-0003-00 | XB072742 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C4149 | 283-0003-00 | хв065056 | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C4149 | 283-0003-00 | XB064023 | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4154 | 283-0003-00 | хв050300 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C4154 | 283-0003-00 | хв056029 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C4154 | 283-0003-00 | хв056025 | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4154 | 283-0003-00 | XB072742 | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C4154 | 283-0003-00 | хв065056 | (8002A ONLY) CAP.,FXD,CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C4154 | 283-0003-00 | XB064023 | (8002A OPTION 45 ONLY) CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4165 | 283-0003-00 | хв050300 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONLY) | 72982 | 855-558Z5U-103Z |
| C4165 | 283-0003-00 | XB056029 | (8001 ONL) CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C4165 | 283-0003-00 | хв056025 | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4165 | 283-0003-00 | ХВ072742 | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|------------------|
| C4165 | 283-0003-00 | XB065056 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C4165 | 283-0003-00 | XB064023 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C4185 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C4185 | 283-0023-00 | B015112 | B056028X | CAP.,FXD,CER DI:0.lUF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4185 | 283-0023-00 | B015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C4185 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C4185 | 283-0023-00 | B010100 | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C4185 | 283-0023-00 | B010100 | B064022X | | 91418 | MX0104Z1205R5 |
| C5011 | 290-0209-00 | в010100 | в050299х | | 56289 | 30D688 |
| C5011 | 283-0209-00 | B015112 | B056028X | CAP.,FXD,CER DI:1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8130M050Z5U0105M |
| C5011 | 283-0209-00 | в015112 | в056024х | CAP.,FXD,CER DI:1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8130M050Z5U0105M |
| C5011 | 283-0209-00 | в032000 | B072741X | CAP., FXD, CER DI:1UF, 20%, 50V (8002A ONLY) | 72982 | 8130M050Z5U0105M |
| C5011 | 283-0209-00 | B010100 | в065055х | CAP.,FXD,CER DI:1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8130M050Z5U0105M |
| C5011 | 283-0209-00 | в010100 | B064022X | CAP., FXD, CER DI:1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8130M050Z5U0105M |
| C5021 | 283-0023-00 | B010100 | в050299х | | 91418 | MX0104Z1205R5 |
| C5021 | 283-0023-00 | B015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5021 | 283-0023-00 | B015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5021 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5021 | 283-0023-00 | B010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5021 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5025 | 283-0023-00 | B010100 | B050299X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5025 | 283-0023-00 | B015112 | в056028х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5025 | 283-0023-00 | B015112 | в056024х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5025 | 283-0023-00 | в032000 | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5025 | 283-0023-00 | в010100 | в065055х | CAP.,FXD,CER DI:0.lUF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5025 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5029 | 283-0023-00 | в010100 | B050299X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5029 | 283-0023-00 | в015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| C5029 | 283-0023-00 | в015112 | в056024х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5029 | 283-0023-00 | в032000 | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5029 | 283-0023-00 | в010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5029 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5041 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5041 | 283-0023-00 | в015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5041 | 283-0023-00 | в015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5041 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5041 | 283-0023-00 | в010100 | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5041 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5045 | 283-0023-00 | в010100 | в050299х | | 91418 | MX0104Z1205R5 |
| C5045 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5045 | 283-0023-00 | B015112 | в056024Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5045 | 283-0023-00 | в032000 | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5045 | 283-0023-00 | в010100 | в065055х | CAP.,FXD,CER DI:0.lUF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5045 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5049 | 283-0023-00 | в010100 | в050299х | | 91418 | MX0104Z1205R5 |
| C5049 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5049 | 283-0023-00 | в015112 | в056024х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5049 | 283-0023-00 | в032000 | B072741X | | 91418 | MX0104Z1205R5 |
| C5049 | 283-0023-00 | в010100 | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5049 | 283-0023-00 | в010100 | в064022Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5061 | 283-0023-00 | в010100 | в050299х | | 91418 | MX0104Z1205R5 |
| C5061 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5061 | 283-0023-00 | в015112 | B056024X | CAP., FXD, CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C5061 | 283-0023-00 | в032000 | B072741X | (8001 OPTION 49 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5061 | 283-0023-00 | в010100 | в065055х | | 91418 | MX0104Z1205R5 |
| C5061 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | M fr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|---|---------------------|------------------|
| C5065 | 283-0023-00 | в010100 | в050299Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5065 | 283-0023-00 | B015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5065 | 283-0023-00 | B015112 | в056024х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5065 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5065 | 283-0023-00 | в010100 | B065055X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5065 | 283-0023-00 | в010100 | в064022Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5069 | 283-0023-00 | B010100 | в050299Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5069 | 283-0023-00 | в015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5069 | 283-0023-00 | В015112 | в056024Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5069 | 283-0023-00 | в032000 | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5069 | 283-0023-00 | в010100 | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5069 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5079 | 283-0111-00 | хв050300 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C5079 | 283-0111-00 | XB056029 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C5079 | 283-0111-00 | хв056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C5079 | 283-0111-00 | ХВ072742 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C5079 | 283-0111-00 | ХВ065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C5079 | 283-0111-00 | хв064023 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C5081 | 283-0023-00 | в010100 | в050299Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5081 | 283-0023-00 | B015112 | в056028Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5081 | 283-0023-00 | в015112 | в056024Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5081 | 283-0023-00 | в032000 | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5081 | 283-0023-00 | B010100 | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5081 | 283-0023-00 | в010100 | в064022Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5085 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER D1:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5085 | 283-0023-00 | B015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5085 | 283-0023-00 | в015112 | B056024X | (8001 OPTION 45 ONLY) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5085 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |

12-48 @ JUN 1981

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|-------------------|---|-------------|-----------------|
| C5085 | 283-0023-00 | | B065055X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5085 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5089 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5089 | 283-0023-00 | | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5089 | 283-0023-00 | в015112 | в056024х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5089 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5089 | 283-0023-00 | в010100 | в065055Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5089 | 283-0023-00 | | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5101 | 283-0023-00 | | в050299х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5101 | 283-0023-00 | | B056028X | CAP.,FXD,CER DI:0.lUF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5101 | 283-0023-00 | B015112 | B056024X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5101 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5101 | 283-0023-00 | | в065055х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5101 | 283-0023-00 | B010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5105 | 283-0023-00 | B010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5105 | 283-0023-00 | | в056028х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5105 | 283-0023-00 | B015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5105 | 283-0023-00 | | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5105 | 283-0023-00 | | B065055X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5105 | 283-0023-00 | B010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5109 | 283-0023-00 | | в050299Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5109 | 283-0023-00 | | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5109 | 283-0023-00 | | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5109 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5109 | 283-0023-00 | | B065055X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5109 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5131 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C5131 | 283-0023-00 | | в056028х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|---|-------------|------------------|
| C5131 | 283-0023-00 | в015112 | в056024Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5131 | 283-0023-00 | в032000 | B072741X | (8001 OFFICE 49 ONE) CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C5131 | 283-0023-00 | в010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C5131 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C5169 | 290-0209-00 | XB050300 | | (8002A OFTION 49 ONLI) CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8001 ONLY) | 56289 | 30D688 |
| C5169 | 290-0209-00 | хв056029 | | CAP., FXD, ELCTLT:50UF, +75-10%, 25V (8001 OPTION 45 ONLY) | 56289 | 30D688 |
| C5169 | 290-0209-00 | XB056025 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8001 OPTION 49 ONLY) | 56289 | 30D688 |
| C5169 | 290-0209-00 | XB072742 | | (8002A ONLY) | 56289 | 30D688 |
| C5169 | 290-0209-00 | хв065056 | | CAP., FXD, ELCTLT:50UF, +75-10%, 25V (8002A OPTION 45 ONLY) | 56289 | 30Д688 |
| C5169 | 290-0209-00 | XB064023 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8002A OPTION 49 ONLY) | 56289 | 30D688 |
| C6004 | 283-0111-00 | хв050300 | | (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C6004 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C6004 | 283-0111-00 | хв056025 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C6004 | 283-0111-00 | XB072742 | | (8001 OFFICIA 47 ONE) CAP.,FXD,CER DI:0.1UF,20%,50V (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C6004 | 283-0111-00 | хв065056 | | CAP.,FXD,CER DI:0.1UF,20%,50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C6004 | 283-0111-00 | хв064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C6006 | 283-0111-00 | хв050300 | | (8001 ONLY) | 72982 | 8121-N088Z5U104M |
| C6006 | 283-0111-00 | хв056029 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C6006 | 283-0111-00 | хв056025 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8001 OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C6006 | 283-0111-00 | XB072742 | | (8002A ONLY) | 72982 | 8121-N088Z5U104M |
| C6006 | 283-0111-00 | хв065056 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 45 ONLY) | 72982 | 8121-N088Z5U104M |
| C6006 | 283-0111-00 | XB064023 | | CAP., FXD, CER DI:0.1UF, 20%, 50V (8002A OPTION 49 ONLY) | 72982 | 8121-N088Z5U104M |
| C6009 | 290-0209-00 | хв050300 | | (8001 ONLY) | 56289 | 30D688 |
| C6009 | 290-0209-00 | хв056029 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8001 OPTION 45 ONLY) | 56289 | 30D688 |
| C6009 | 290-0209-00 | хв056025 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8001 OPTION 49 ONLY) | 56289 | 30D688 |
| C6009 | 290-0209-00 | XB072742 | | (8001 OFILOW 49 ONLY) CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8002A ONLY) | 56289 | 30D688 |
| C6009 | 290-0209-00 | XB065056 | | CAP., FXD, ELCTLT:50UF, +75-10%, 25V (8002A OPTION 45 ONLY) | 56289 | 30D688 |
| C6009 | 290-0209-00 | ХВ064023 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8002A OPTION 49 ONLY) | 56289 | 30D688 |

12-50 @ JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|---|-------------|-----------------|
| C6029 | 290-0209-00 | XB050300 | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V (8001 ONLY) | 56289 | 30D688 |
| C6029 | 290-0209-00 | XB056029 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8001 OPTION 45 ONLY) | 56289 | 30D688 |
| C6029 | 290-0209-00 | хв056025 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8001 OPTION 49 ONLY) | 56289 | 30D688 |
| C6029 | 290-0209-00 | XB072742 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8002A ONLY) | 56289 | 30D688 |
| C6029 | 290-0209-00 | хв065056 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8002A OPTION 45 ONLY) | 56289 | 30D688 |
| C6029 | 290-0209-00 | ХВ064023 | | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8002A OPTION 49 ONLY) | 56289 | 30D688 |
| C6046 | 283-0003-00 | XB050300 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 ONLY) | 72982 | 855-558z5U-103z |
| C6046 | 283-0003-00 | XB056029 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V (8001 OPTION 45 ONLY) | 72982 | 855-558z5U-103z |
| C6046 | 283-0003-00 | хв056025 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8001 OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C6046 | 283-0003-00 | XB072742 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A ONLY) | 72982 | 855-558Z5U-103Z |
| C6046 | 283-0003-00 | XB065056 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 45 ONLY) | 72982 | 855-558Z5U-103Z |
| C6046 | 283-0003-00 | хв064023 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V (8002A OPTION 49 ONLY) | 72982 | 855-558Z5U-103Z |
| C6066 | 283-0023-00 | B010100 | в050299Х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C6066 | 283-0023-00 | B015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C6066 | 283-0023-00 | B015112 | в056024х | CAP., FXD, CER DI: 0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C6066 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.luf, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C6066 | 283-0023-00 | в010100 | B065055X | CAP., FXD, CER DI:0.lUF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C6066 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C6116 | 283-0023-00 | в010100 | в050299х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C6116 | 283-0023-00 | B015112 | B056028X | (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C6116 | 283-0023-00 | B015112 | B056024X | CAP., FXD, CER DI: 0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C6116 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C6116 | 283-0023-00 | в010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C6116 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C6161 | 283-0023-00 | в010100 | B050299X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C6161 | 283-0023-00 | в015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C6161 | 283-0023-00 | B015112 | B056024X | · · · · · · · · · · · · · · · · · · · | 91418 | MX0104Z1205R5 |
| C6161 | 283-0023-00 | в032000 | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|------------------|
| C6161 | 283-0023-00 | в010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C6161 | 283-0023-00 | B010100 | B064022X | | 91418 | MX0104Z1205R5 |
| C7011 | 290-0209-00 | в010100 | в050299х | CAP., FXD, ELCTLT:50UF, +75-10%, 25V (8001 ONLY) | 56289 | 30D688 |
| C7011 | 283-0023-00 | в015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C7011 | 283-0023-00 | в015112 | в056024х | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C7011 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C7011 | 283-0023-00 | в010100 | в065055Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C7011 | 283-0023-00 | в010100 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C7042 | 283-0023-00 | в010100 | в050299Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C7042 | 283-0023-00 | B015112 | B056028X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C7042 | 283-0023-00 | в015112 | в056024х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C7042 | 283-0023-00 | в032000 | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C7042 | 283-0023-00 | B010100 | B065055X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C7042 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C7121 | 290-0209-00 | в010100 | в050299х | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V (8001 ONLY) | 56289 | 30D688 |
| C7121 | 283-0023-00 | в015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C7121 | 283-0023-00 | B015112 | в056024х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C7121 | 283-0023-00 | в032000 | в072741х | | 91418 | MX0104Z1205R5 |
| C7121 | 283-0023-00 | B010100 | B065055X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C7121 | 283-0023-00 | в010100 | B064022X | | 91418 | MX0104Z1205R5 |
| C7145 | 283-0330-00 | XB045290 | B060299X | CAP., FXD, CER DI:100PF, 5%, 50V (8001 ONLY) | 72982 | 8111N068C0G0101J |
| C7145 | 283-0330-00 | XB045294 | B056028X | CAP., FXD, CER DI:100PF, 5%, 50V (8001 OPTION 45 ONLY) | 72982 | 8111N068C0G0101J |
| C7145 | 283-0330-00 | XB045293 | в056024Х | | 72982 | 8111N068C0G0101J |
| C7145 | 283-0330-00 | хв052437 | B072741X | CAP., FXD, CER DI:100PF, 5%, 50V (8002A ONLY) | 72982 | 8111N068C0G0101J |
| C7145 | 283-0330-00 | XB052482 | в065055х | CAP.,FXD,CER DI:100PF,5%,50V (8002A OPTION 45 ONLY) | 72982 | 8111N068C0G0101J |
| C7145 | 283-0330-00 | хв052439 | B064022X | | 72982 | 8111N068C0G0101J |
| C7174 | 283-0023-00 | в010100 | в050299х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C7174 | 283-0023-00 | B015112 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |

12-52 @ JUN 1981

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|------------------|---|-------------|-----------------|
| C7174 | 283-0023-00 | в015112 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C7174 | 283-0023-00 | в032000 | B072741X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C7174 | 283-0023-00 | в010100 | в065055х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C7174 | 283-0023-00 | в010100 | B064022X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C8148 | 283-0023-00 | ХВ045290 | в050299Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 ONLY) | 91418 | MX0104Z1205R5 |
| C8148 | 283-0023-00 | XB045294 | B056028X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8001 OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C8148 | 283-0023-00 | XB045293 | B056024X | CAP.,FXD,CER DI:0.1UF,+80-20%,12V (8001 OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| C8148 | 283-0023-00 | | B072741X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A ONLY) | 91418 | MX0104Z1205R5 |
| C8148 | 283-0023-00 | XB052482 | в065055Х | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 45 ONLY) | 91418 | MX0104Z1205R5 |
| C8148 | 283-0023-00 | хв052439 | B064022X | CAP., FXD, CER DI:0.1UF, +80-20%, 12V (8002A OPTION 49 ONLY) | 91418 | MX0104Z1205R5 |
| DL1140 | 119-0982-00 | хв050300 | | DELAY LINE, ELEC: 200NS, 100 OHM (8001 ONLY) | 97722 | EP19828 |
| DL1140 | 119-0982-00 | XB056029 | | DELAY LINE, ELEC: 200NS, 100 OHM (8001 OPTION 45 ONYL) | 97722 | EP19828 |
| DL1140 | 119-0982-00 | хв056025 | | DELAY LINE, ELEC: 200NS, 100 OHM (8001 OPTION 49 ONLY) | 97722 | EP19828 |
| DL1140 | 119-0982-00 | XB072742 | | DELAY LINE, ELEC: 200NS, 100 OHM (8002A ONLY) | 97722 | EP19828 |
| DL1140 | 119-0982-00 | XB065056 | | DELAY LINE, ELEC: 200NS, 100 OHM (8002A OPTION 45 ONLY) | 97722 | EP19828 |
| DL1140 | 119-0982-00 | хв064023 | | DELAY LINE, ELEC: 200NS, 100 OHM (8002A OPTION 49 ONLY) | 97722 | EP19828 |
| DL2140 | 119-0982-00 | в010100 | B050299X | DELAY LINE, ELEC: 200NS, 100 OHM (8001 ONLY) | 97722 | EP19828 |
| DL2140 | 119-0982-00 | B015112 | B056028X | DELAY LINE, ELEC: 200NS, 100 OHM (8001 OPTION 45 ONLY) | 97722 | EP19828 |
| DL2140 | 119-0982-00 | в015112 | B056024X | DELAY LINE, ELEC: 200NS, 100 OHM (8001 OPTION 49 ONLY) | 97722 | EP19828 |
| DL2140 | 119-0982-00 | в032000 | B072741X | DELAY LINE, ELEC: 200NS, 100 OHM (8002A ONLY) | 97722 | EP19828 |
| DL2140 | 119-0982-00 | B010100 | B065055X | | 97722 | EP19828 |
| DL2140 | 119-0982-00 | в010100 | B064022X | | 97722 | EP19828 |
| R1085 | 315-0510-00 | XB050300 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R1085 | 315-0510-00 | XB056029 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | СВ5105 |
| R1085 | 315-0510-00 | ХВО56025 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R1085 | 315-0510-00 | XB072742 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| R1085 | 315-0510-00 | хв065056 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R1085 | 315-0510-00 | хв064023 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|--|-------------|-----------------|
| R1089 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 ONLY) | 01121 | CB2205 |
| R1089 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2205 |
| R1089 | 315-0220-00 | XB056025 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB2205 |
| R1089 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8002A ONLY) | 01121 | CB2205 |
| R1089 | 315-0220-00 | хв065056 | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | СВ2205 |
| R1089 | 315-0220-00 | хв064023 | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB2205 |
| R1091 | 315-0220-00 | XB050300 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 ONLY) | 01121 | CB2205 |
| R1091 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2205 |
| R1091 | 315-0220-00 | | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2205 |
| R1091 | 315-0220-00 | XB072742 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8002A ONLY) | 01121 | CB2205 |
| R1091 | 315-0220-00 | хв065056 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB2205 |
| R1091 | 315-0220-00 | хв064023 | RES., FXD, CMPSN:22 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB2205 |
| R1092 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 ONLY) | 01121 | CB2205 |
| R1092 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2205 |
| R1092 | 315-0220-00 | хв056025 | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2205 |
| R1092 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8002A ONLY) | 01121 | CB2205 |
| R1092 | 315-0220-00 | хв065056 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB2205 |
| R1092 | 315-0220-00 | XB064023 | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | СВ2205 |
| R1093 | 315-0510-00 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 ONLY) | 01121 | CB5105 |
| R1093 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R1093 | 315-0510-00 | хв056025 | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R1093 | 315-0510-00 | XB072742 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A ONLY) | 01121 | CB5105 |
| R1093 | 315-0510-00 | хв065056 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R1093 | 315-0510-00 | XB064023 | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R1096 | 315-0220-00 | XB050300 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 ONLY) | 01121 | CB2205 |
| R1096 | 315-0220-00 | XB056029 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2205 |
| R1096 | 315-0220-00 | XB056025 | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2205 |
| R1096 | 315-0220-00 | XB072742 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8002A ONLY) | 01121 | CB2205 |

| Ckt No. | Tektronix Part N o. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|--------------------------------|---|-------------|-----------------|
| R1096 | 315-0220-00 | XB065056 | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | СВ2205 |
| R1096 | 315-0220-00 | XB064023 | RES., FXD, CMPSN: 22 OHM, 5%, 0.25w (8002A OPTION 49 ONLY) | 01121 | CB2205 |
| R1141 | 315-0101-00 | хв050300 | RES., FXD, CMPSN:100 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB1015 |
| R1141 | 315-0101-00 | XB056029 | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB1015 |
| R1141 | 315-0101-00 | хв056025 | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB1015 |
| R1141 | 315-0101-00 | XB072742 | RES., FXD, CMPSN:100 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB1015 |
| R1141 | 315-0101-00 | хв065056 | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB1015 |
| R1141 | 315-0101-00 | XB064023 | RES., FXD, CMPSN:100 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB1015 |
| R2085 | 315-0510-00 | XB050300 | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R2085 | 315-0510-00 | XB056029 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R2085 | 315-0510-00 | XB056025 | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R2085 | 315-0510-00 | XB072742 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A ONLY) | 01121 | CB5105 |
| R2085 | 315-0510-00 | хв065056 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R2085 | 315-0510-00 | XB064023 | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R2089 | 315-0510-00 | хв050300 | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R2089 | 315-0510-00 | XB056029 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R2089 | 315-0510-00 | XB056025 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R2089 | 315-0510-00 | хв072742 | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| R2089 | 315-0510-00 | хв065056 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R2089 | 315-0510-00 | XB064023 | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R2091 | 315-0510-00 | хв050300 | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R2091 | 315-0510-00 | XB056029 | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R2091 | 315-0510-00 | хв056025 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R2091 | 315-0510-00 | ХВ072742 | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| R2091 | 315-0510-00 | хв065056 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R2091 | 315-0510-00 | XB064023 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R2096 | 315-0510-00 | хв050300 | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R2096 | 315-0510-00 | XB056029 | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |

| Ckt No. | | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------|-------------------|------------------|---|-------------|-----------------|
| R2096 | 315-0510-00 | XB056025 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R2096 | 315-0510-00 | хв072742 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A ONLY) | 01121 | CB5105 |
| R2096 | 315-0510-00 | хв065056 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R2096 | 315-0510-00 | хв064023 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | СВ5105 |
| R2101 | 315-0510-00 | хв050300 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R2101 | 315-0510-00 | хв056029 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R2101 | 315-0510-00 | хв056025 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R2101 | 315-0510-00 | хв072742 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| R2101 | 315-0510-00 | XB065056 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R2101 | 315-0510-00 | хв064023 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R2109 | 315-0510-00 | хв050300 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 ONLY) | 01121 | СВ5105 |
| R2109 | 315-0510-00 | хв056029 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R2109 | 315-0510-00 | хв056025 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R2109 | 315-0510-00 | хв072742 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| R2109 | 315-0510-00 | хв065056 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R2109 | 315-0510-00 | XB064023 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R2111 | 315-0222-00 | хв050300 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 ONLY) | 01121 | CB2225 |
| R2111 | 315-0222-00 | ХВО56029 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB2225 |
| R2111 | 315-0222-00 | хв056025 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB2225 |
| R2111 | 315-0222-00 | XB072742 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A ONLY) | 01121 | CB2225 |
| R2111 | 315-0222-00 | хв065056 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB2225 |
| R2111 | 315-0222-00 | хв064023 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB2225 |
| R2118 | 315-0510-00 | в010100 | в050299х | | 01121 | CB5105 |
| R2118 | 315-0510-00 | в015112 | B056028X | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R2118 | 315-0510-00 | в015112 | в056024Х | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R2118 | 315-0510-00 | в032000 | в072741х | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| R2118 | 315-0510-00 | в010100 | в065055Х | | 01121 | CB5105 |
| R2118 | 315-0510-00 | B010100 | B064022X | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |

12-56 @ JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| R2121 | 315-0222-00 | в010100 | в050299х | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 ONLY) | 01121 | CB2225 |
| R2121 | 315-0222-00 | в015112 | в056028х | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2225 |
| R2121 | 315-0222-00 | в015112 | в056024Х | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2225 |
| R2121 | 315-0222-00 | в032000 | B072741X | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A ONLY) | 01121 | CB2225 |
| R2121 | 315-0222-00 | в010100 | в065055х | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB2225 |
| R2121 | 315-0222-00 | в010100 | B064022X | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB2225 |
| R2135 | 315-0101-00 | хв050300 | | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8001 ONLY) | 01121 | СВ1015 |
| R2135 | 315-0101-00 | хв056029 | | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB1015 |
| R2135 | 315-0101-00 | ХВ056025 | | RES., FXD, CMPSN:100 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB1015 |
| R2135 | 315-0101-00 | XB072742 | | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8002A ONLY) | 01121 | CB1015 |
| R2135 | 315-0101-00 | хв065056 | | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB1015 |
| R2135 | 315-0101-00 | хв064023 | | RES., FXD, CMPSN:100 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB1015 |
| R2141 | 315-0101-00 | B010100 | B050299X | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8001 ONLY) | 01121 | CB1015 |
| R2141 | 315-0101-00 | B015112 | B056028X | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB1015 |
| R2141 | 315-0101-00 | в015112 | B056024X | RES., FXD, CMPSN:100 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB1015 |
| R2141 | 315-0101-00 | в032000 | B072741X | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8002A ONLY) | 01121 | CB1015 |
| R2141 | 315-0101-00 | в010100 | B065055X | RES., FXD, CMPSN: 100 OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB1015 |
| R2141 | 315-0101-00 | в010100 | B064022X | RES., FXD, CMPSN:100 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB1015 |
| R2145 | 315-0101-00 | в010100 | B050299X | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8001 ONLY) | 01121 | CB1015 |
| R2145 | 315-0101-00 | B015112 | B056028X | | 01121 | CB1015 |
| R2145 | 315-0101-00 | в015112 | B056024X | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB1015 |
| R2145 | 315-0101-00 | в032000 | B072741X | RES.,FXD,CMPSN:100 OHM,5%,0.25W (8002A ONLY) | 01121 | CB1015 |
| R2145 | 315-0101-00 | в010100 | B065055X | | 01121 | CB1015 |
| R2145 | 315-0101-00 | в010100 | B064022X | | 01121 | CB1015 |
| R2169 | 321-0335-00 | хв050300 | | RES.,FXD,FILM:30.1K OHM,1%,0.125W (8001 ONLY) | 91637 | MFF1816G30101F |
| R2169 | 321-0335-00 | XB056029 | | (8001 ONL) RES.,FXD,FILM:30.1K OHM,1%,0.125W (8001 OPTION 45 ONLY) | 91637 | MFF1816G30101F |
| R2169 | 321-0335-00 | XB056025 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W (8001 OPTION 49 ONLY) | 91637 | MFF1816G30101F |
| R2169 | 321-0335-00 | XB072742 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W (8002A ONLY) | 91637 | MFF1816G30101F |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|-----------------|
| R2169 | 321-0335-00 | хв065056 | | RES.,FXD,FILM:30.1K OHM,1%,0.125W (8002A OPTION 45 ONLY) | 91637 | MFF1816G30101F |
| R2169 | 321-0335-00 | XB064023 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W (8002A OPTION 49 ONLY) | 91637 | MFF1816G30101F |
| R3085 | 315-0510-00 | хв050300 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R3085 | 315-0510-00 | XB056029 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R3085 | 315-0510-00 | XB056025 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R3085 | 315-0510-00 | ХВ072742 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A ONLY) | 01121 | CB5105 |
| R3085 | 315-0510-00 | хв065056 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R3085 | 315-0510-00 | | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R3087 | 315-0510-00 | | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R3087 | 315-0510-00 | XB056029 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R3087 | 315-0510-00 | XB056025 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R3087 | 315-0510-00 | XB072742 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| R3087 | 315-0510-00 | XB065056 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R3087 | 315-0510-00 | XB064023 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R3112 | 315-0470-00 | в010100 | в050299Х | RES., FXD, CMPSN:47 OHM, 5%, 0.25W (8001 ONLY) | 01121 | СВ4705 |
| R3112 | 315-0470-00 | B015112 | B056028X | RES.,FXD,CMPSN:47 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB4705 |
| R3112 | 315-0470-00 | B015112 | B056024X | | 01121 | СВ4705 |
| R3112 | 315-0470-00 | в032000 | B072741X | RES., FXD, CMPSN:47 OHM, 5%, 0.25W (8002A ONLY) | 01121 | СВ4705 |
| R3112 | 315-0470-00 | в010100 | в065055Х | RES.,FXD,CMPSN:47 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | СВ4705 |
| R3112 | 315-0470-00 | в010100 | B064022X | RES.,FXD,CMPSN:47 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | СВ4705 |
| R3114 | 315-0510-00 | B010100 | в050299Х | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R3114 | 315-0510-00 | B015112 | B056028X | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R3114 | 315-0510-00 | B015112 | B056024X | | 01121 | CB5105 |
| R3114 | 315-0510-00 | в032000 | B072741X | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| R3114 | 315-0510-00 | B010100 | B065055X | RES.,FXD,CMPSN:51 OHM,5%,U.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R3114 | 315-0510-00 | в010100 | B064022X | | 01121 | CB5105 |
| R3165 | 321-0335-00 | XB050300 | | (8002A OPTION 49 ONLY) RES.,FXD,FILM:30.1K OHM,1%,0.125W (8001 ONLY) | 91637 | MFF1816G30101F |
| R3165 | 321-0335-00 | XB056029 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W (8001 OPTION 45 ONLY) | 91637 | MFF1816G30101F |

12-58 @ JUN 1981

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|-------------------|---|-------------|-----------------|
| R3165 | 321-0335-00 | хв056025 | | RES.,FXD,FILM:30.1K OHM,1%,0.125W (8001 OPTION 49 ONLY) | 91637 | MFF1816G30101F |
| R3165 | 321-0335-00 | XB072742 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W | 91637 | MFF1816G30101F |
| R3165 | 321-0335-00 | хв065056 | | (8002A ONLY) RES.,FXD,FILM:30.1K OHM,1%,0.125W (8002A OPTION 45 ONLY) | 91637 | MFF1816G30101F |
| R3165 | 321-0335-00 | XB064023 | | RES., FXD, FILM: 30.1K OHM, 1%, 0.125W (8002A OPTION 49 ONLY) | 91637 | MFF1816G30101F |
| R4085 | 315-0510-00 | XB050300 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 ONLY) | 01121 | CB5105 |
| R4085 | 315-0510-00 | XB056029 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R4085 | 315-0510-00 | XB056025 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R4085 | 315-0510-00 | | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A ONLY) | 01121 | CB5105 |
| R4085 | 315-0510-00 | | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R4085 | 315-0510-00 | XB064023 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| R4097 | 315-0510-00 | хв050300 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R4097 | 315-0510-00 | ХВ056029 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R4097 | 315-0510-00 | XB056025 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R4097 | 315-0510-00 | XB072742 | | (8001 OPTION 49 ONLY) RES., FXD, CMPSN:51 OHM, 5%, 0.25w | 01121 | CB5105 |
| R4097 | 315-0510-00 | хв065056 | | (8002A ONLY) RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| R4097 | 315-0510-00 | XB064023 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R4112 | 315-0470-00 | в010100 | в050299х | (8002A OPTION 49 ONLY) RES.,FXD,CMPSN:47 OHM,5%,0.25W | 01121 | CB4705 |
| R4112 | 315-0470-00 | в015112 | B056028X | (8001 ONLY) RES.,FXD,CMPSN:47 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | СВ4705 |
| R4112 | 315-0470-00 | | в056024Х | RES.,FXD,CMPSN:47 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | СВ4705 |
| R4112 | 315-0470-00 | | B072741X | RES., FXD, CMPSN: 47 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB4705 |
| R4112 | 315-0470-00 | в010100 | в065055х | RES., FXD, CMPSN: 47 OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB4705 |
| R4112 | 315-0470-00 | в010100 | B064022X | RES., FXD, CMPSN: 47 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | СВ4705 |
| R4114 | 315-0510-00 | в010100 | в050299х | | 01121 | CB5105 |
| R4114 | 315-0510-00 | в015112 | B056028X | | 01121 | CB5105 |
| R4114 | 315-0510-00 | в015112 | B056024X | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R4114 | 315-0510-00 | в032000 | B072741X | | 01121 | CB5105 |
| R4114 | 315-0510-00 | в010100 | в065055х | | 01121 | CB5105 |
| R4114 | 315-0510-00 | в010100 | B064022X | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|-----------------|
| R4141 | 315-0222-00 | в010100 | B050299X | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 ONLY) | 01121 | CB2225 |
| R4141 | 315-0222-00 | B015112 | B056028X | (8001 ONDIT) RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2225 |
| R4141 | 315-0222-00 | в015112 | в056024Х | RES., FXD, CMPSN:2.2K OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2225 |
| R4141 | 315-0222-00 | в032000 | B072741X | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB2225 |
| R4141 | 315-0222-00 | в010100 | в065055х | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB2225 |
| R4141 | 315-0222-00 | в010100 | B064022X | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB2225 |
| R4145 | 315-0222-00 | хв050300 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 ONLY) | 01121 | CB2225 |
| R4145 | 315-0222-00 | XB056029 | | (8001 ONLI) RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2225 |
| R4145 | 315-0222-00 | хв056025 | | RES., FXD, CMPSN:2.2K OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2225 |
| R4145 | 315-0222-00 | XB072742 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A ONLY) | 01121 | CB2225 |
| R4145 | 315-0222-00 | хв065056 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB2225 |
| R4145 | 315-0222-00 | хв064023 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB2225 |
| R4147 | 307-0595-00 | в010100 | в050299х | RES NTWK, FXD FI:7,5.6K OHM, 2%, 1.0W (8001 ONLY) | 32997 | 4308R-101-562 |
| R4147 | 307-0595-00 | B015112 | B056028X | RES NTWK,FXD FI:7,5.6K OHM,2%,1.0W (8001 OPTION 45 ONLY) | 32997 | 4308R-101-562 |
| R4147 | 307-0595-00 | B015112 | в056024х | RES NTWK, FXD F1:7,5.6K OHM,2%,1.0W (8001 OPTION 49 ONLY) | 32997 | 4308R-101-562 |
| R4147 | 307-0595-00 | в032000 | B072741X | RES NTWK, FXD FI:7,5.6K OHM, 2%, 1.0W (8002A ONLY) | 32997 | 4308R-101-562 |
| R4147 | 307-0595-00 | в010100 | в065055х | | 32997 | 4308R-101-562 |
| R4147 | 307-0595-00 | в010100 | B064022X | | 32997 | 4308R-101-562 |
| R4171 | 307-0596-00 | хв050300 | | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W (8001 ONLY) | 91637 | MSP08A01222G |
| R4171 | 307-0596-00 | хв056029 | | RES NTWK,FXD FI:7,2.2K OHM,2%,1.0W (8001 OPTION 45 ONLY) | 91637 | MSP08A01222G |
| R4171 | 307-0596-00 | хв056025 | | RES NTWK, FXD F1:7,2.2K OHM, 2%, 1.0W (8001 OPTION 49 ONLY) | 91637 | MSP08A01222G |
| R4171 | 307-0596-00 | XB072742 | | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W (8002A ONLY) | 91637 | MSP08A01222G |
| R4171 | 307-0596-00 | хв065056 | | RES NTWK, FXD F1:7,2.2K OHM,2%,1.0W (8002A OPTION 45 ONLY) | 91637 | MSP08A01222G |
| R4171 | 307-0596-00 | хв064023 | | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W (8002A OPTION 49 ONLY) | 91637 | MSP08A01222G |
| R5085 | 315-0510-00 | XB050300 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| R5085 | 315-0510-00 | XB056029 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| R5085 | 315-0510-00 | ХВ056025 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| R5085 | 315-0510-00 | XB072742 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |

12-60 @ JUN 1981

| Mf | Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|-----|---------|-----------------------|-------------------|------------------|---|-------------|-----------------|
| | R5085 | 315-0510-00 | ХВ065056 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| | R5085 | 315-0510-00 | XB064023 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W | 01121 | CB5105 |
| | R5089 | 315-0510-00 | хв050300 | | (8002A OPTION 49 ONLY) RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 ONLY) | 01121 | CB5105 |
| | R5089 | 315-0510-00 | XB056029 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| | R5089 | 315-0510-00 | хв056025 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| | R5089 | 315-0510-00 | XB072742 | | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5105 |
| | R5089 | 315-0510-00 | XB065056 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5105 |
| | R5089 | 315-0510-00 | | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| | R5111 | 315-0220-00 | | в050299Х | | 01121 | СВ2205 |
| | R5111 | 315-0220-00 | в015112 | B056028X | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2205 |
| | R5111 | 315-0220-00 | B015112 | B056024X | (8001 OFTION 45 ONL) RES.,FXD,CMPSN:22 OHM,5%,0.25W (8001 OFTION 49 ONLY) | 01121 | CB2205 |
| | R5111 | 315-0220-00 | в032000 | B072741X | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB2205 |
| | R5111 | 315-0220-00 | в010100 | B065055X | RES.,FXD,CMPSN:22 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB2205 |
| 91t | R5111 | 315-0220-00 | в010100 | B064022X | | 01121 | CB2205 |
| ים | R5112 | 315-0510-00 | в010100 | B050299X | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5105 |
| | R5112 | 315-0510-00 | B015112 | B056028X | RES., FXD, CMPSN: 51 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB5105 |
| | R5112 | 315-0510-00 | в015112 | B056024X | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB5105 |
| | R5112 | 315-0510-00 | в032000 | B072741X | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A ONLY) | 01121 | СВ5105 |
| | R5112 | 315-0510-00 | в010100 | в065055Х | RES.,FXD,CMPSN:51 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | СВ5105 |
| | R5112 | 315-0510-00 | в010100 | B064022X | RES., FXD, CMPSN:51 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB5105 |
| | R5113 | 315-0220-00 | в010100 | B050299X | | 01121 | CB2205 |
| | R5113 | 315-0220-00 | B015112 | B056028X | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB2205 |
| | R5113 | 315-0220-00 | в015112 | B056024X | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2205 |
| | R5113 | 315-0220-00 | в032000 | B072741X | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8002A ONLY) | 01121 | СВ2205 |
| | R5113 | 315-0220-00 | в010100 | B065055X | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB2205 |
| | R5113 | 315-0220-00 | в010100 | B064022X | | 01121 | CB2205 |
| | R5114 | 315-0220-00 | в010100 | в050299х | | 01121 | CB2205 |
| | R5114 | 315-0220-00 | B015112 | B056028X | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W (8001 OPTION 45 ONLY) | 01121 | CB2205 |

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | iel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|-------------------|--|-------------|-----------------|
| R5165 | 315-0222-00 | хв050300 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 ONLY) | 01121 | CB2225 |
| R5165 | 315-0222-00 | XB056029 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2225 |
| R5165 | 315-0222-00 | XB056025 | | RES., FXD, CMPSN:2.2K OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2225 |
| R5165 | 315-0222-00 | XB072742 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A ONLY) | 01121 | CB2225 |
| R5165 | 315-0222-00 | XB065056 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB2225 |
| R5165 | 315-0222-00 | ХВ064023 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB2225 |
| R6006 | 321-0291-00 | XB050300 | | RES.,FXD,FILM:10.5K OHM,1%,0.125W (8001 ONLY) | 91637 | MFF1816G10501F |
| R6006 | 321-0291-00 | XB056029 | | RES.,FXD,FILM:10.5K OHM,1%,0.125W (8001 OPTION 45 ONLY) | 91637 | MFF1816G10501F |
| R6006 | 321-0291-00 | XB056025 | | RES., FXD, FILM:10.5K OHM, 1%, 0.125W (8001 OPTION 49 ONLY) | 91637 | MFF1816G10501F |
| RANNA | 321-0291-00 | XB072 742 | | RES., FXD, FILM:10.5K OHM, 1%, 0.125W (8002A ONLY) | 91637 | MFF1816G10501F |
| R6006 | 321-0291-00 | хв065056 | | RES.,FXD,FILM:10.5K OHM,1%,0.125W (8002A OPTION 45 ONLY) | 91637 | MFF1816G10501F |
| R6006 | 321-0291-00 | ХВ064023 | | RES., FXD, FILM:10.5K OHM, 1%, 0.125W (8002A OPTION 49 ONLY) | 91637 | MFF1816G10501F |
| R6007 | 321-0303-00 | хв050300 | | RES.,FXD,FILM:14K OHM,1%,0.125W (8001 ONLY) | 91637 | MFF1816G14001F |
| R6007 | 321-0303-00 | хв056029 | | RES.,FXD,FILM:14K OHM,1%,0.125W (8001 OPTION 45 ONLY) | 91637 | MFF1816G14001F |
| R6007 | 321-0303-00 | XB056025 | | RES., FXD, FILM: 14K OHM, 1%, 0.125W (8001 OPTION 49 ONLY) | 91637 | MFF1816G14001F |
| R6007 | 321-0303-00 | XB072742 | | RES.,FXD,FILM:14K OHM,1%,0.125W (8002A ONLY) | 91637 | MFF1816G14001F |
| R6007 | 321-0303-00 | хв065056 | | RES., FXD, FILM: 14K OHM, 1%, 0.125W (8002A OPTION 45 ONLY) | 91637 | MFF1816G14001F |
| R6007 | 321-0303-00 | XB064023 | | RES., FXD, FILM: 14K OHM, 1%, 0.125W (8002A OPTION 49 ONLY) | 91637 | MFF1816G14001F |
| R6040 | 315-0222-00 | хв050300 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB2225 |
| R6040 | 315-0222-00 | XB056029 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB2225 |
| R6040 | 315-0222-00 | XB056025 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8001 OPTION 49 ONLY) | 01121 | CB2225 |
| R6040 | 315-0222-00 | XB072742 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A ONLY) | 01121 | CB2225 |
| R6040 | 315-0222-00 | хв065056 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB2225 |
| R6040 | 315-0222-00 | XB064023 | | RES., FXD, CMPSN:2.2K OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB2225 |
| R6067 | 315-0222-00 | XB045290 | в050299х | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 ONLY) | 01121 | CB2225 |
| R6067 | 315-0222-00 | XB045293 | B056028X | | 01121 | CB2225 |
| R6067 | 315-0222-00 | XB052437 | B056024X | | 01121 | CB2225 |
| R6067 | 315-0222-00 | XB052482 | B072741X | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB2225 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| R6067 | 315-0222-00 | XB052439 | в065055Х | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A OPTION 45 ONLY) | 01121 | CB2225 |
| R6067 | 315-0222-00 | хв000000 | в000000х | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R6155 | 315-0561-00 | хв050300 | | (8002A OPTION 49 ONLY) RES.,FXD,CMPSN:560 OHM,5%,0.25W (8001 ONLY) | 01121 | CB5615 |
| R6155 | 315-0561-00 | хв056029 | | RES.,FXD,CMPSN:560 OHM,5%,0.25W (8001 OPTION 45 ONLY) | 01121 | CB5615 |
| R6155 | 315-0561-00 | XB056025 | | RES.,FXD,CMPSN:560 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5615 |
| R6155 | 315-0561-00 | XB072742 | | RES., FXD, CMPSN: 560 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5615 |
| R6155 | 315-0561-00 | ХВ065056 | | RES.,FXD,CMPSN:560 OHM,5%,0.25W (8002A OPTION 45 ONLY) | 01121 | CB5615 |
| R6155 | 315-0561-00 | | | RES., FXD, CMPSN: 560 OHM, 5%, 0.25W (8002A OPTION 49 ONLY) | 01121 | CB5615 |
| R6159 | 315-0561-00 | | | RES., FXD, CMPSN: 560 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB5615 |
| R6159 | 315-0561-00 | ХВ056029 | | RES.,FXD,CMPSN:560 OHM,5%,0.25W | 01121 | CB5615 |
| R6159 | 315-0561-00 | хв056025 | | (8001 OPTION 45 ONLY) RES.,FXD,CMPSN:560 OHM,5%,0.25W (8001 OPTION 49 ONLY) | 01121 | CB5615 |
| R6159 | 315-0561-00 | XB072742 | | RES., FXD, CMPSN: 560 OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB5615 |
| R6159 | 315-0561-00 | хв065056 | | RES.,FXD,CMPSN:560 OHM,5%,0.25W | 01121 | CB5615 |
| R6159 | 315-0561-00 | хв064023 | | (8002A OPTION 45 ONLY) RES.,FXD,CMPSN:560 OHM,5%,0.25W | 01121 | CB5615 |
| R6165 | 315-0222-00 | ХВ050300 | | (8002A OPTION 49 ONLY) RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 ONLY) | 01121 | CB2225 |
| R6165 | 315-0222-00 | XB056029 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R6165 | 315-0222-00 | XB056025 | | (8001 OPTION 45 ONLY) RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R6165 | 315-0222-00 | XB072742 | | (8001 OPTION 49 ONLY) RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A ONLY) | 01121 | CB2225 |
| R6165 | 315-0222-00 | хв065056 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R6165 | 315-0222-00 | хв064023 | | (8002A OPTION 45 ONLY) RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB2225 |
| R7048 | | в010100 | в050299х | RES., FXD, CMPSN: 470 OHM, 5%, 0.25W (8001 ONLY) | 01121 | CB4715 |
| R7048 | 315-0471-00 | B015112 | B056028X | RES.,FXD,CMPSN:470 OHM,5%,0.25W | 01121 | CB4715 |
| R7048 | 315-0471-00 | B015112 | в056024х | | 01121 | CB4715 |
| R7048 | 315-0471-00 | в032000 | B072741X | (8001 OPTION 49 ONLY) RES.,FXD,CMPSN:470 OHM,5%,0.25W (8002A ONLY) | 01121 | CB4715 |
| R7048 | 315-0471-00 | в010100 | в065055х | | 01121 | CB4715 |
| R7048 | 315-0471-00 | в010100 | в064022Х | (8002A OPTION 45 ONLY) RES.,FXD,CMPSN:470 OHM,5%,0.25W (8002A OPTION 49 ONLY) | 01121 | CB4715 |
| R7066 | 317-0301-00 | XB045290 | в050299х | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8001 ONLY) | 01121 | BB3015 |
| R7066 | 317-0301-00 | хв045294 | в056028х | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8001 OPTION 45 ONLY) | 01121 | BB3015 |

12-64 @ JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|---|-------------|-----------------|
| R7066 | 317-0301-00 | | B056024X | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8001 OPTION 49 ONLY) | 01121 | вв3015 |
| R7066 | 317-0301-00 | | в072741х | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W | 01121 | вв3015 |
| R7066 | 317-0301-00 | XB052482 | в065055Х | (8002A ONLY) RES.,FXD,CMPSN:300 OHM,5%,0.125W (8002A OPTION 45 ONLY) | 01121 | BB3015 |
| R7066 | 317-0301-00 | хв052439 | B064022X | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8002A OPTION 49 ONLY) | 01121 | BB3015 |
| R7067 | 317-0301-00 | XB045290 | в050299Х | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8001 ONLY) | 01121 | вв3015 |
| R7067 | 317-0301-00 | хв045294 | в056028Х | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8001 OPTION 45 ONLY) | 01121 | вв3015 |
| R7067 | 317-0301-00 | | в056024Х | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8001 OPTION 49 ONLY) | 01121 | BB3015 |
| R7067 | 317-0301-00 | хв052437 | B072741X | (8002A ONLY) | 01121 | BB3015 |
| R7067 | | | в065055х | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8002A OPTION 45 ONLY) | 01121 | BB3015 |
| R7067 | 317-0301-00 | XB052439 | B064022X | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8002A OPTION 49 ONLY) | 01121 | вв3015 |
| R7068 | 317-0301-00 | | в050299х | (8001 ONLY) (8001 ONLY) | 01121 | вв3015 |
| R7068 | 317-0301-00 | | B056028X | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8001 OPTION 45 ONLY) | 01121 | BB3015 |
| R7068 | 317-0301-00 | хв045293 | в056024х | RES., FXD, CMPSN:300 OHM, 5%, 0.125W (8001 OPTION 49 ONLY) | 01121 | вв3015 |
| R7068 | 317-0301-00 | | B072741X | (8002A ONLY) | 01121 | вв3015 |
| R7068 | | | в065055Х | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8002A OPTION 45 ONLY) | 01121 | BB3015 |
| R7068 | 317-0301-00 | | в064022X | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8002A OPTION 49 ONLY) | 01121 | вв3015 |
| R7069 | 317-0301-00 | | в050299х | (8002A OFILON 49 ONLY) RES.,FXD,CMPSN:300 OHM,5%,0.125W (8001 ONLY) | 01121 | вв3015 |
| R7069 | 317-0301-00 | XB045294 | B056028X | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8001 OPTION 45 ONLY) | 01121 | BB3015 |
| R7069 | | XB045293 | B056024X | RES.,FXD,CMPSN:300 OHM,5%,0.125W | 01121 | вв3015 |
| R7069 | 317-0301-00 | | B072741X | (8001 OPTION 49 ONLY) RES.,FXD,CMPSN:300 OHM,5%,0.125W | 01121 | BB3015 |
| R7069 | 317-0301-00 | | в065055Х | (8002A ONLY) RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8002A OPTION 45 ONLY) | 01121 | вв3015 |
| R7069 | 317-0301-00 | XB052439 | B064022X | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W | 01121 | вв3015 |
| R7077 | 317-0301-00 | XB045290 | в050299х | | 01121 | вв3015 |
| R7077 | 317-0301-00 | XB045294 | B056028X | (8001 ONLY) RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8001 OPTION 45 ONLY) | 01121 | вв3015 |
| R7077 | 317-0301-00 | | B056024X | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8001 OPTION 49 ONLY) | 01121 | вв3015 |
| R7077 | 317-0301-00 | | B072741X | | 01121 | BB3015 |
| R7077 | 317-0301-00 | хв052482 | в065055х | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8002A OPTION 45 ONLY) | 01121 | BB3015 |
| R7077 | 317-0301-00 | хв052439 | B064022X | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8002A OPTION 49 ONLY) | 01121 | BB3015 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|-----------------|
| R7079 | 317-0151-00 | | B050299X | RES., FXD, CMPSN: 150 OHM, 5%, 0.125W (8001 ONLY) | 01121 | BB1515 |
| R7079 | 317-0151-00 | | B056028X | RES.,FXD,CMPSN:150 OHM,5%,0.125W (8001 OPTION 45 ONLY) | 01121 | BB1515 |
| R7079 | 317-0151-00 | хв045293 | B056024X | RES., FXD, CMPSN:150 OHM, 5%, 0.125W (8001 OPTION 49 ONLY) | 01121 | BB1515 |
| R7079 | 317-0151-00 | | B072741X | RES.,FXD,CMPSN:150 OHM,5%,0.125W (8002A ONLY) | 01121 | BB1515 |
| R7079 | | XB052482 | B065055X | RES., FXD, CMPSN: 150 OHM, 5%, 0.125W (8002A OPTION 45 ONLY) | 01121 | BB1515 |
| R7079 | 317-0151-00 | | B064022X | RES., FXD, CMPSN:150 OHM, 5%, 0.125W (8002A OPTION 49 ONLY) | 01121 | BB1515 |
| R7095 | 317-0301-00 | | в050299Х | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8001 ONLY) | 01121 | вв3015 |
| R7095 | 317-0301-00 | XB045294 | B056028X | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8001 OPTION 45 ONLY) | 01121 | BB3015 |
| R7095 | 317-0301-00 | | B056024X | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8001 OPTION 49 ONLY) | 01121 | ВВ3015 |
| R7095 | 317-0301-00 | XB052437 | B072741X | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8002A ONLY) | 01121 | вв3015 |
| R7095 | 317-0301-00 | | B065055X | RES.,FXD,CMPSN:300 OHM,5%,0.125W (8002A OPTION 45 ONLY) | 01121 | вв3015 |
| R7095 | 317-0301-00 | хв052439 | B064022X | RES., FXD, CMPSN: 300 OHM, 5%, 0.125W (8002A OPTION 49 ONLY) | 01121 | BB3015 |
| R7099 | 317-0750-00 | | B050299X | RES.,FXD,CMPSN:75 OHM,5%,0.125W (8001 ONLY) | 01121 | вв7505 |
| R7099 | 317-0750-00 | XB045294 | B056028X | RES.,FXD,CMPSN:75 OHM,5%,0.125W (8001 OPTION 45 ONLY) | 01121 | вв7505 |
| R7099 | 317-0750-00 | | B056028X | RES., FXD, CMPSN: 75 OHM, 5%, 0.125W (8001 OPTION 49 ONLY) | 01121 | вв7505 |
| R7099 | 317-0750-00 | XB052437 | B072741X | RES.,FXD,CMPSN:75 OHM,5%,0.125W | 01121 | вв7505 |
| R7099 | 317-0750-00 | XB052482 | B065055X | RES.,FXD,CMPSN:75 OHM,5%,0.125W (8002A OPTION 45 ONLY) | 01121 | вв7505 |
| R7099 | 317-0750-00 | ХВО52439 | B064022X | RES., FXD, CMPSN:75 OHM, 5%, 0.125W (8002A OPTION 49 ONLY) | 01121 | вв7505 |
| R7147 | 307-0596-00 | | B050299X | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W (8001 ONLY) | 91637 | MSP08A01222G |
| R7147 | 307-0596-00 | | B056028X | RES NTWK, FXD F1:7,2.2K OHM,2%,1.0W (8001 OPTION 45 ONLY) | 91637 | MSP08A01222G |
| R7147 | 307-0596-00 | B015112 | B056028X | RES NTWK, FXD F1:7,2.2K OHM,2%,1.0W (8001 OPTION 49 ONLY) | 91637 | MSP08A01222G |
| R7147 | 307-0596-00 | в032000 | B072741X | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W (8002A ONLY) | 91637 | MSP08A01222G |
| R7147 | 307-0596-00 | в010100 | B065055X | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W (8002A OPTION 45 ONLY) | 91637 | MSP08A01222G |
| R7147 | 307-0596-00 | в010100 | B064022X | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W (8002A OPTION 49 ONLY) | 91637 | MSP08A01222G |
| S4140 | 260-1589-00 | B010100 | B050299X | SWITCH, PUSH:(6)SPST,0.1A,5V (8001 ONLY) | 00779 | 435166-4 |
| S4140 | 260-1589-00 | B015112 | B056028X | | 00779 | 435166-4 |
| S4140 | 260-1589-00 | B015112 | B056024X | | 00779 | 435166-4 |
| S4140 | 260-1589-00 | в032000 | B072741X | SWITCH, PUSH: (6) SPST, 0.1A, 5V (8002A ONLY) | 00779 | 435166-4 |

12-66

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|------------------|--|-------------|-----------------|
| S4140 | 260-1589-00 | в010100 | в065055х | SWITCH, PUSH: (6)SPST, 0.1A,5V (8002A OPTION 45 ONLY) | 00779 | 435166-4 |
| S4140 | 260-1589-00 | в010100 | B064022X | SWITCH, PUSH: (6)SPST, 0.1A,5V | 00779 | 435166-4 |
| S4163 | 118-0320-00 | XB050300 | | (8002A OPTION 49 ONLY) SWITCH, SLIDE: 4 SPST, 50M AMP, 24V (8001 ONLY) | 11237 | 206-4 |
| S4163 | 118-0320-00 | хв056029 | | SWITCH, SLIDE: 4 SPST, 50M AMP, 24V (8001 OPTION 45 ONLY) | 11237 | 206-4 |
| S4163 | 118-0320-00 | хв056025 | | SWITCH, SLIDE: 4 SPST, 50M AMP, 24V (8001 OPTION 49 ONLY) | 11237 | 206-4 |
| S4163 | 118-0320-00 | ХВ072742 | | SWITCH, SLIDE: 4 SPST, 50M AMP, 24V (8002A ONLY) | 11237 | 206-4 |
| S4163 | 118-0320-00 | XB065056 | | SWITCH,SLIDE:4 SPST,50M AMP,24V (8002A OPTION 45 ONLY) | 11237 | 206-4 |
| S4163 | 118-0320-00 | XB064023 | | SWITCH, SLIDE: 4 SPST, 50M AMP, 24V (8002A OPTION 49 ONLY) | 11237 | 206-4 |
| U1000 | 156-1000-00 | хв050300 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U1000 | 156-1000-00 | хв056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1000 | 156-1000-00 | хв056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1000 | 156-1000-00 | XB072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1000 | 156-1000-00 | хв065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1000 | 156-1000-00 | ХВ064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1010 | 156-1000-00 | хв050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U1010 | 156-1000-00 | хв056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1010 | 156-1000-00 | хв056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1010 | 156-1000-00 | XB072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1010 | 156-1000-00 | хв065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1010 | 156-1000-00 | XB064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1020 | 156-1000-00 | хв050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U1020 | 156-1000-00 | хв056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1020 | 156-1000-00 | хв056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1020 | 156-1000-00 | XB072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1020 | | хв065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1020 | 156-1000-00 | XB064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1030 | 156-1000-00 | хв050300 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U1030 | 156-1000-00 | XB056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |

| Ckt No. | | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------|--------------------------------|---|-------------|-----------------|
| U1030 | 156-1000-00 | XB056025 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1030 | 156-1000-00 | XB072742 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1030 | 156-1000-00 | хв065056 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1030 | 156-1000-00 | XB064023 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1040 | 156-1000-00 | хв050300 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U1040 | 156-1000-00 | хв056029 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1040 | 156-1000-00 | хв056025 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1040 | 156-1000-00 | XB072742 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1040 | 156-1000-00 | хв065056 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1040 | 156-1000-00 | хв065023 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1050 | 156-1000-00 | хв050300 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| บ1050 | 156-1000-00 | хв056029 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1050 | 156-1000-00 | хв056025 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1050 | 156-1000-00 | XB072742 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1050 | 156-1000-00 | хв065056 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1050 | 156-1000-00 | XB064023 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1060 | 156-1000-00 | x B050300 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U1060 | 156-1000-00 | хв056029 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1060 | 156-1000-00 | XB056025 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1060 | 156-1000-00 | XB072742 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1060 | 156-1000-00 | хв065056 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1060 | 156-1000-00 | XB064023 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1070 | 156-1000-00 | хв050300 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U1070 | 156-1000-00 | XB056029 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1070 | 156-1000-00 | хв056025 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1070 | 156-1000-00 | XB072742 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1070 | 156-1000-00 | хв065056 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1070 | 156-1000-00 | XB064023 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |

12-68 @ JUN 1981

| Ckt No. | | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------|-------------------|------------------|---|-------------|-----------------|
| U1080 | 156-1000-00 | хв050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U1080 | 156-1000-00 | хв056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1080 | 156-1000-00 | XB056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1080 | 156-1000-00 | XB072742 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U1080 | 156-1000-00 | хв065056 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U1080 | 156-1000-00 | XB064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U1090 | 156-0125-00 | хв050300 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8001 ONLY) | 80009 | 156-0125-00 |
| U1090 | 156-0125-00 | хв056029 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8001 OPTION 45 ONLY) | 80009 | 156-0125-00 |
| U1090 | 156-0125-00 | XB056025 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8001 OPTION 49 ONLY) | 80009 | 156-0125-00 |
| U1090 | 156-0125-00 | ХВ072742 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A ONLY) | 80009 | 156-0125-00 |
| U1090 | 156-0125-00 | хв065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A OPTION 45 ONLY) | 80009 | 156-0125-00 |
| U1090 | 156-0125-00 | хв064023 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A OPTION 49 ONLY) | 80009 | 156-0125-00 |
| U1100 | 156-0948-00 | хв050300 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8001 ONLY) | 80009 | 156-0948-00 |
| U1100 | 156-0948-00 | хв056029 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8001 OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U1100 | 156-0948-00 | хв056025 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8001 OPTION 49 ONLY) | 80009 | 156-0948-00 |
| U1100 | 156-0948-00 | XB072742 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8002A ONLY) | 80009 | 156-0948-00 |
| U1100 | 156-0948-00 | хв065056 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U1100 | 156-0948-00 | хв064023 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8002A OPTION 49 ONLY) | 80009 | 156-0948-00 |
| U1110 | 156-0381-00 | в010100 | в050299 | MICROCIRCUIT, DI:QUAD 2-INPUT EXCL OR GATES (8001 ONLY) | 80009 | 156-0381-00 |
| U1110 | 156-0992-00 | в050300 | | MICROCIRCUIT, DI: QUAD TTL-TO MOS DRIVER (8001 ONLY) | 80009 | 156-0992-00 |
| U1110 | 156-0381-00 | в015112 | в056028 | MICROCIRCUIT, DI:QUAD 2-INPUT EXCL OR GATES (8001 OPTION 45 ONLY) | 80009 | 156-0381-00 |
| U1110 | 156-0381-00 | в056029 | | MICROCIRCUIT, DI:QUAD 2-INPUT EXCL OR GATES (8001 OPTION 45 ONLY) | 80009 | 156-0381-00 |
| U1110 | 156-0391-00 | B015112 | в056024 | MICROCIRCUIT,DI:HEX LATCH WITH CLEAR (8001 OPTION 49 ONLY) | 04713 | 74LS174(N OR J) |
| U1110 | 156-0992-00 | в056025 | | MICROCIRCUIT, DI:QUAD TTL-TO MOS DRIVER (8001 OPTION 49 ONLY) | 80009 | 156-0992-00 |
| U1110 | 156-0391-00 | в032000 | в072741 | MICROCIRCUIT, DI:HEX LATCH WITH CLEAR (8002A ONLY) | 04713 | 74LS174(N OR J) |
| U1110 | 156-0992-00 | в072742 | | MICROCIRCUIT, DI:QUAD TTL-TO MOS DRIVER (8002A ONLY) | 80009 | 156-0992-00 |
| U1110 | 156-0391-00 | в010100 | в065055 | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR (8002A OPTION 45 ONLY) | 04713 | 74LS174(N OR J) |
| U1110 | 156-0992-00 | в065056 | | MICROCIRCUIT, DI: QUAD TTL-TO MOS DRIVER (8002A OPTION 45 ONLY) | 80009 | 156-0992-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|-----------------|
| v1110 | 156-0391-00 | в010100 | в064022 | MICROCIRCUIT, DI:HEX LATCH WITH CLEAR (8002A OPTION 49 ONLY) | 04713 | 74LS174(N OR J) |
| U1110 | 156-0992-00 | в064023 | | MICROCIRCUIT, DI: QUAD TTL-TO MOS DRIVER | 80009 | 156-0992-00 |
| U1120 | 156-0693-00 | хв050300 | | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:DECODER/DEMULTIPLEXER (8001 ONLY) | 01295 | SN74S139N |
| U1120 | 156-0693-00 | хв056029 | | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER (8001 OPTION 45 ONLY) | 01295 | SN74S139N |
| U1120 | 156-0693-00 | XB056025 | | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER (8001 OPTION 49 ONLY) | 01295 | SN74S139N |
| U1120 | 156-0693-00 | ХВ072742 | | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER (8002A ONLY) | 01295 | sn74s139n |
| U1120 | 156-0693-00 | хв065056 | | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER | 01295 | SN74S139N |
| U1120 | 156-0693-00 | хв064023 | | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER | 01295 | SN74S139N |
| U1130 | 156-0323-00 | хв050300 | | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:HEX. INVERTER (8001 ONLY) | 01295 | SN74S04N |
| U1130 | 156-0323-00 | хв056029 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U1130 | 156-0323-00 | | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:HEX. INVERTER | 01295 | SN74S04N |
| U1130 | 156-0323-00 | | | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI:HEX. INVERTER (8002A ONLY) | 01295 | SN74S04N |
| U1130 | 156-0323-00 | XB065056 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U1130 | 156-0323-00 | XB064023 | | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U1140 | 156-0998-00 | хв050300 | | (8002A OPTION 49 ONLY) MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR (8001 ONLY) | 80009 | 156-0998-00 |
| U1140 | 156-0998-00 | хв056029 | | MICROCKT, INTFC:HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U1140 | 156-0998-00 | XB056025 | | (8001 OPTION 45 ONLY) MICROCKT, INTEC:HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U1140 | 156-0998-00 | XB072742 | | (8001 OPTION 49 ONLY) MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR (8002A ONLY) | 80009 | 156-0998-00 |
| U1140 | 156-0998-00 | хв065056 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR (8002A OPTION 45 ONLY) | 80009 | 156-0998-00 |
| U1140 | 156-0998-00 | XB064023 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR (8002A OPTION 49 ONLY) | 80009 | 156-0998-00 |
| U1150 | 156-0999-00 | XB050300 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV (8001 ONLY) | 04713 | MC6888/MC8T98L |
| U1150 | 156-0999-00 | XB056029 | | MICROCKT, INTFC:HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U1150 | 156-0999-00 | XB056025 | | (8001 OPTION 45 ONLY) MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U1150 | 156-0999-00 | XB072742 | | (8001 OPTION 49 ONLY) MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV (8002A ONLY) | 04713 | MC6888/MC8T98L |
| U1150 | 156-0999-00 | хв065056 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U1150 | 156-0999-00 | хв064023 | | (8002A OPTION 45 ONLY) MICROCKT, INTEC:HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U1160 | 156-0180-00 | хв050300 | | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8001 ONLY) | 01295 | SN74S00(N OR J) |
| U1160 | 156-0180-00 | хв056029 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8001 OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |

12-70 @ JUN 1981

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | del No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|-------------------------------|-------------------|-------------------|---|-------------|-----------------|
| U1160 | 156-0180-00 | XB056025 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8001 OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U1160 | 156-0180-00 | XB072742 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A ONLY) | 01295 | SN74S00(N OR J) |
| U1160 | 156-0180-00 | хв065056 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8002A OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| U1160 | 156-0180-00 | XB064023 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8002A OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U1170 | 156-0323-00 | хв050300 | | MICROCIRCUIT, DI: HEX. INVERTER (8001 ONLY) | 01295 | SN74S04N |
| U1170 | 156-0323-00 | XB056029 | | MICROCIRCUIT, DI: HEX. INVERTER (8001 OPTION 45 ONLY) | 01295 | SN74S04N |
| U1170 | 156-0323-00 | XB056025 | | MICROCIRCUIT, DI:HEX. INVERTER (8001 OPTION 49 ONLY) | 01295 | SN74S04N |
| U1170 | 156-0323-00 | XB072742 | | MICROCIRCUIT, DI:HEX. INVERTER (8002A ONLY) | 01295 | SN74S04N |
| U1170 | 156-0323-00 | хв065056 | | MICROCIRCUIT, DI: HEX. INVERTER (8002A OPTION 45 ONLY) | 01295 | SN74S04N |
| U1170 | 156-0323-00 | хв064023 | | MICROCIRCUIT, DI: HEX. INVERTER (8002A OPTION 49 ONLY) | 01295 | SN74S04N |
| U2000 | 156-1000-00 | хв050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U2000 | 156-1000-00 | хв056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2000 | 156-1000-00 | хв056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2000 | 156-1000-00 | XB072742 | | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| บ2000 | 156-1000-00 | XB065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2000 | 156-1000-00 | хв064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2010 | 156-1000-00 | хв050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U2010 | 156-1000-00 | XB056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2010 | 156-1000-00 | хв056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2010 | 156-1000-00 | XB072742 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U2010 | 156-1000-00 | хв065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2010 | 156-1000-00 | хв064023 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2020 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ2020 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U2020 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2020 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2020 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U 20 20 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |

| Ckt No. | Tektronix Part No. | Serial/Mode Eff | l No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------|-----------------|--|-------------|-----------------|
| U2020 | 156-1112-00 | | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U2020 | 156-1000-00 | в072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U2020 | 156-1112-00 | B010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2020 | 156-1000-00 | | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2020 | 156-1112-00 | | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2020 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2030 | 156-1112-00 | | в050299 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U2030 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U2030 | 156-1112-00 | B015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2030 | 156-1000-00 | | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2030 | 156-1112-00 | B015112 | в056024 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2030 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2030 | 156-1112-00 | | в072741 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U2030 | 156-1000-00 | B072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U2030 | 156-1112-00 | B010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2030 | 156-1000-00 | | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2030 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2030 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2040 | 156-1112-00 | | в050299 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U2040 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U2040 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2040 | 156-1000-00 | | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2040 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2040 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2040 | 156-1112-00 | | в072741 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U2040 | 156-1000-00 | B072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U2040 | 156-1112-00 | B010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2040 | 156-1000-00 | | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |

12-72 @ JUN 1981

| Ckt No. | | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|-------------|-------------------|-------------------|---|-------------|-----------------|
| U2040 | 156-1112-00 | в010100 | B064022 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2040 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ2050 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U2050 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U2050 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2050 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2050 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2050 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2050 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U2050 | 156-1000-00 | в072742 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2050 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ2050 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U 2 050 | 156-1112-00 | в010100 | B064022 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2050 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2060 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U2060 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U2060 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2060 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2060 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2060 | 156-1000-00 | в056025 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2060 | 156-1112-00 | в032000 | B072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U2060 | 156-1000-00 | в072742 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| บ2060 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2060 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2060 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2060 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2070 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ2070 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |

| Ckt No. | Tektronix Part No. | Serial/Mode Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------|------------------|--|-------------|-----------------|
| U2070 | 156-1112-00 | | B056028 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2070 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2070 | 156-1112-00 | | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2070 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2070 | 156-1112-00 | | B072741 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U2070 | 156-1000-00 | | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U2070 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2070 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2070 | 156-1112-00 | в010100 | B064022 | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2070 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2080 | 156-1112-00 | в010100 | в050299 | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U2080 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U2080 | 156-1112-00 | в015112 | B056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2080 | 156-1000-00 | в056029 | | (8001 OPTION 45 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U2080 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2080 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U2080 | 156-1112-00 | в032000 | B072741 | (8001 OPTION 49 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2080 | 156-1000-00 | в072742 | | (8002A ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U2080 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2080 | 156-1000-00 | в065056 | | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| บ2080 | 156-1112-00 | в010100 | B064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2080 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U2090 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ2090 | 156-0125-00 | в050300 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX (8001 ONLY) | 80009 | 156-0125-00 |
| U2090 | 156-1112-00 | B015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2090 | 156-0125-00 | в056029 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8001 OPTION 45 ONLY) | 80009 | 156-0125-00 |
| บ2090 | 156-1112-00 | в015112 | В056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2090 | 156-0125-00 | в056025 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX (8001 OPTION 49 ONLY) | 80009 | 156-0125-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------------|-----------------------|-------------------|-------------------|---|-------------|-----------------|
| U2090 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U 2090 | 156-0125-00 | в072742 | | (8002A ONLY) MICROCIRCUIT,DI:QUAD 2-INPUT MUX (8002A ONLY) | 80009 | 156-0125-00 |
| U2090 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2090 | 156-0125-00 | в065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A OPTION 45 ONLY) | 80009 | 156-0125-00 |
| บ2090 | 156-1112-00 | B010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2090 | 156-0125-00 | в064023 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A OPTION 49 ONLY) | 80009 | 156-0125-00 |
| U2100 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U2100 | 156-0035-00 | в050300 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8001 ONLY) | 80009 | 156-0035-00 |
| U2100 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2100 | 156-0035-00 | в056029 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8001 OPTION 45 ONLY) | 80009 | 156-0035-00 |
| U2100 | 156-1112-00 | B015112 | в056024 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2100 | 156-0035-00 | в056025 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8001 OPTION 49 ONLY) | 80009 | 156-0035-00 |
| U2100 | 156-1112-00 | в032000 | В072741 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U2100 | 156-0035-00 | в072742 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8002A ONLY) | 80009 | 156-0035-00 |
| U2100 | 156-1112-00 | B010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U2100 | 156-0035-00 | в065056 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8002A OPTION 45 ONLY) | 80009 | 156-0035-00 |
| U2100 | 156-1112-00 | в010100 | B064022 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U2100 | 156-0035-00 | в064023 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8002A OPTION 49 ONLY) | 80009 | 156-0035-00 |
| · U2110 | 156-1015-00 | хв050300 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8001 ONLY) | 80009 | 156-1015-00 |
| U2110 | 156-1015-00 | хв056029 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8001 OPTION 45 ONLY) | 80009 | 156-1015-00 |
| U2110 | 156-1015-00 | хв056025 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8001 OPTION 49 ONLY) | 80009 | 156-1015-00 |
| U2110 | 156-1015-00 | ХВ072742 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8002A ONLY) | 80009 | 156-1015-00 |
| U2110 | 156-1015-00 | хв065056 | | MICROCIRCUIT, DI:DUAL J-K EDGE TRIG FF (8002A OPTION 45 ONLY) | 80009 | 156-1015-00 |
| U2110 | 156-1015-00 | ХВ064023 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8002A OPTION 49 ONLY) | 80009 | 156-1015-00 |
| U2120 | 156-0321-00 | в010100 | в050299 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8001 ONLY) | 80009 | 156-0321-00 |
| U2120 | 156-0180-00 | в050300 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8001 ONLY) | 01295 | SN74S00(N OR J) |
| U2120 | 156-0321-00 | в015112 | в056028 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8001 OPTION 45 ONLY) | 80009 | 156-0321-00 |
| U2120 | 156-0180-00 | в056029 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8001 OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|-----------------|
| U2120 | 156-0321-00 | в015112 | в056024 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8001 OPTION 49 ONLY) | 80009 | 156-0321-00 |
| U2120 | 156-0180-00 | в056025 | | MICROCIRCUIT,DI:QUAD 2-INPUT NAND GATE (8001 OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U2120 | 156-0321-00 | в032000 | в072741 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8002A ONLY) | 80009 | 156-0321-00 |
| U2120 | 156-0180-00 | в072742 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A ONLY) | 01295 | SN74S00(N OR J) |
| U2120 | 156-0321-00 | в010100 | в065055 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8002A OPTION 45 ONLY) | 80009 | 156-0321-00 |
| U2120 | 156-0180-00 | в065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| U2120 | 156-0321-00 | в010100 | в064022 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8002A OPTION 49 ONLY) | 80009 | 156-0321-00 |
| U2120 | 156-0180-00 | в064023 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A OPTION 49 ONLY) | 01295 | sn74s00(n or J) |
| U2130 | 156-0180-00 | в010100 | в050299 | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 ONLY) | 01295 | sn74s00(n or J) |
| U2130 | 156-0125-00 | в050300 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX (8001 ONLY) | 80009 | 156-0125-00 |
| U2130 | 156-0180-00 | в015112 | в056028 | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 OPTION 45 ONLY) | 01295 | sn74s00(n or j) |
| U2130 | 156-0125-00 | в056029 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8001 OPTION 45 ONLY) | 80009 | 156-0125-00 |
| U2130 | 156-0180-00 | в015112 | в056024 | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U2130 | 156-0125-00 | в056025 | | MICROCIRCUIT,DI:QUAD 2-INPUT MUX (8001 OPTION 49 ONLY) | 80009 | 156-0125-00 |
| U2130 | 156-0180-00 | в032000 | B072741 | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8002A ONLY) | 01295 | sn74s00(n or j) |
| U2130 | 156-0125-00 | B072742 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A ONLY) | 80009 | 156-0125-00 |
| U2130 | 156-0180-00 | в010100 | в065055 | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| U2130 | 156-0125-00 | в065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A OPTION 45 ONLY) | 80009 | 156-0125-00 |
| U2130 | 156-0180-00 | в010100 | B064022 | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8002A OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U2130 | 156-0125-00 | B064023 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A OPTION 49 ONLY) | 80009 | 156-0125-00 |
| U2140 | 156-0043-00 | хв050300 | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE (8001 ONLY) | 80009 | 156-0043-00 |
| U2140 | 156-0043-00 | XB056029 | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE (8001 OPTION 45 ONLY) | 80009 | 156-0043-00 |
| U2140 | 156-0043-00 | XB056025 | | MICROCIRCUIT,DI:QUAD 2-INPUT POS NOR GATE (8001 OPTION 49 ONLY) | 80009 | 156-0043-00 |
| U2140 | 156-0043-00 | хв072742 | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE (8002A ONLY) | 80009 | 156-0043-00 |
| U2140 | 156-0043-00 | хв065056 | | M1CROCIRCUIT,DI:QUAD 2-INPUT POS NOR GATE (8002A OPTION 45 ONLY) | 80009 | 156-0043-00 |
| U2140 | 156-0043-00 | хв064023 | | MICROCIRCUIT,DI:QUAD 2-INPUT POS NOR GATE (8002A OPTION 49 ONLY) | 80009 | 156-0043-00 |
| U2150 | 156-0999-00 | в010100 | в050299 | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV (8001 ONLY) | 04713 | MC6888/MC8T98L |
| U2150 | 156-0118-00 | в050300 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8001 ONLY) | 80009 | 156-0118-00 |

12-76 @ JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | fel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| U2150 | 156-0999-00 | в015112 | в056028 | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV (8001 OPTION 45 ONLY) | 04713 | MC6888/MC8T98L |
| U2150 | 156-0118-00 | в056029 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8001 OPTION 45 ONLY) | 80009 | 156-0118-00 |
| U2150 | 156-0999-00 | в015112 | в056024 | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV (8001 OPTION 49 ONLY) | 04713 | MC6888/MC8T98L |
| U2150 | 156-0118-00 | в056025 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8001 OPTION 49 ONLY) | 80009 | 156-0118-00 |
| U2150 | 156-0999-00 | в032000 | B072741 | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV (8002A ONLY) | 04713 | MC6888/MC8T98L |
| U2150 | 156-0118-00 | в072742 | | MICROCIRCUIT,DI:J-K MASTER-SLAVE FLIP-FLOP (8002A ONLY) | 80009 | 156-0118-00 |
| U2150 | 156-0999-00 | в010100 | в065055 | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV (8002A OPTION 45 ONLY) | 04713 | MC6888/MC8T98L |
| U2150 | 156-0118-00 | в065056 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0118-00 |
| U2150 | 156-0999-00 | в010100 | в064022 | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV (8002A OPTION 49 ONLY) | 04713 | MC6888/MC8T98L |
| U2150 | 156-0118-00 | в064023 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8002A OPTION 49 ONLY) | 80009 | 156-0118-00 |
| U2160 | 156-0304-00 | в010100 | в050299 | MICROCIRCUIT, DI: DUAL 4-INPUT, NAND GATE (8001 ONLY) | 18324 | N74S20A |
| บ2160 | 156-0180-00 | в050300 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 ONLY) | 01295 | sn74s00(n or j) |
| U2160 | 156-0304-00 | B015112 | в056028 | MICROCIRCUIT, DI: DUAL 4-INPUT, NAND GATE (8001 OPTION 45 ONLY) | 18324 | N74S20A |
| U2160 | 156-0180-00 | в056029 | | MICROCIRCUIT,DI:QUAD 2-INPUT NAND GATE (8001 OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| U2160 | 156-0304-00 | B015112 | в056024 | MICROCIRCUIT, DI: DUAL 4-INPUT, NAND GATE (8001 OPTION 49 ONLY) | 18324 | N74S20A |
| U2160 | 156-0180-00 | в056025 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8001 OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U2160 | 156-0304-00 | в032000 | B072741 | MICROCIRCUIT, DI: DUAL 4-INPUT, NAND GATE (8002A ONLY) | 18324 | N74S20A |
| U2160 | 156-0180-00 | В072742 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A ONLY) | 01295 | sn74s00(n or j) |
| U2160 | 156-0304-00 | в010100 | в065055 | MICROCIRCUIT, DI: DUAL 4-INPUT, NAND GATE (8002A OPTION 45 ONLY) | 18324 | N74S2OA |
| U2160 | 156-0180-00 | в065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| U2160 | 156-0304-00 | в010100 | B064022 | MICROCIRCUIT, DI: DUAL 4-INPUT, NAND GATE (8002A OPTION 49 ONLY) | 18324 | N74S20A |
| U2160 | 156-0180-00 | в064023 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8002A OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U2170 | 156-0180-00 | в010100 | в050299 | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 ONLY) | 01295 | SN74S00(N OR J) |
| U2170 | 156-0118-00 | в050300 | | MICROCIRCUIT,DI:J-K MASTER-SLAVE FLIP-FLOP (8001 ONLY) | 80009 | 156-0118-00 |
| U2170 | 156-0180-00 | B015112 | в056028 | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| U2170 | 156-0118-00 | в056029 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8001 OPTION 45 ONLY) | 80009 | 156-0118-00 |
| U2170 | 156-0180-00 | в015112 | в056024 | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 OPTION 49 ONLY) | 01295 | sn74s00(n or J) |
| U2170 | 156-0118-00 | в056025 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8001 OPTION 49 ONLY) | 80009 | 156-0118-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| U2170 | 156-0180-00 | в032000 | в072741 | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A ONLY) | 01295 | sn74s00(n or J) |
| U2170 | 156-0118-00 | в072742 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP | 80009 | 156-0118-00 |
| U2170 | 156-0180-00 | в010100 | в065055 | (8002A ONLY) MICROCIRCUIT,DI:QUAD 2-INPUT NAND GATE (8002A OPTION 45 ONLY) | 01295 | sn74s00(n or j) |
| U2170 | 156-0118-00 | в065056 | | MICROCIRCUIT,DI:J-K MASTER-SLAVE FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0118-00 |
| U2170 | 156-0180-00 | в010100 | в064022 | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8002A OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U2170 | 156-0118-00 | в064023 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8002A OPTION 49 ONLY) | 80009 | 156-0118-00 |
| U2180 | 156-0617-00 | в010100 | в050299х | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8001 ONLY) | 01295 | SN74393N |
| U2180 | 156-0617-00 | в015112 | B056028X | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8001 OPTION 45 ONLY) | 01295 | SN74393N |
| U2180 | 156-0617-00 | в015112 | в056024х | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8001 OPTION 49 ONLY) | 01295 | sn74393n |
| U2180 | 156-0617-00 | в032000 | B072741X | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8002A ONLY) | 01295 | SN74393N |
| U2180 | 156-0617-00 | в010100 | в065055х | MICROCIRCUIT, DI:DUAL 4 BIT BIN COUNTER (8002A OPTION 45 ONLY) | 01295 | SN74393N |
| U2180 | 156-0617-00 | в010100 | B064022X | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8002A OPTION 49 ONLY) | 01295 | SN74393N |
| U3000 | 156-1000-00 | хв050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3000 | 156-0617-00 | хв056029 | | (8001 ONLY) MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER | 01295 | SN74393N |
| บ3000 | 156-0617-00 | хв056025 | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8001 OPTION 49 ONLY) | 01295 | sn74393n |
| U3000 | 156-0617-00 | XB072742 | | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8002A ONLY) | 01295 | sn74393n |
| U3000 | 156-0617-00 | хв065056 | | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER | 01295 | sn74393n |
| บ3000 | 156-0617-00 | хв064023 | | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8002A OPTION 49 ONLY) | 01295 | sn74393n |
| U3010 | 156-0617-00 | XB050300 | | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8001 ONLY) | 01295 | sn74393n |
| U3010 | 156-0617-00 | XB056029 | | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8001 OPTION 45 ONLY) | 01295 | sn74393n |
| U3010 | 156-0617-00 | хв056025 | | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8001 OPTION 49 ONLY) | 01295 | sn74393n |
| U3010 | 156-0617-00 | ХВ072742 | | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER | 01295 | sn74393n |
| U3010 | 156-0617-00 | хв065056 | | (8002A ONLY) MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8002A OPTION 45 ONLY) | 01295 | sn74393n |
| U3010 | 156-0617-00 | хв064023 | | MICROCIRCUIT, DI: DUAL 4 BIT BIN COUNTER (8002A OPTION 49 ONLY) | 01295 | sn74393n |
| U3 02 0 | 156-1112-00 | B010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U3020 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U3020 | 156-1112-00 | B015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3020 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |

12-78 @ JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Mode Eff | l No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------|-----------------|---|-------------|-----------------|
| U3020 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3020 | 156-1000-00 | | , | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ3020 | 156-1112-00 | | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U3020 | 156-1000-00 | B072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U3020 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3020 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U3020 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3020 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ3030 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U3030 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U3030 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ3030 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U3030 | 156-1112-00 | во15112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3030 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U3030 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U3030 | 156-1000-00 | в072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U3030 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ3030 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| บ3030 | 156-1112-00 | в010100 г | в064022 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ3030 | 156-1000-00 | B064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U3040 | 156-1112-00 | в010100 1 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U3040 | 156-1000-00 | в050300 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U3040 | 156-1112-00 | в015112 г | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3040 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| 113040 | 156-1112-00 | во15112 г | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ3040 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U3040 | 156-1112-00 | в032000 в | В072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U3040 | 156-1000-00 | в072742 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dsco | nt Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|------------------------------|--|-------------|-----------------|
| U3040 | 156-1112-00 | в010100 в0650 | · · · · · · · · · · · · · · · · · · · | 80009 | 156-1112-00 |
| บ3040 | 156-1000-00 | в065056 | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3040 | 156-1112-00 | в010100 в0640 | (8002A OPTION 45 ONLY) 22 MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3040 | 156-1000-00 | в064023 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ3050 | 156-1112-00 | в010100 в0502 | | 80009 | 156-1112-00 |
| บ3050 | 156-1000-00 | в050300 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| บ3050 | 156-1112-00 | в015112 в0560 | 28 MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3050 | 156-1000-00 | в056029 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| บ3050 | 156-1112-00 | в015112 в0560 | | 80009 | 156-1112-00 |
| U3050 | 156-1000-00 | в056025 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ3050 | 156-1112-00 | в032000 в0727 | | 80009 | 156-1112-00 |
| บ3050 | 156-1000-00 | в072742 | (8002A ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| บ3050 | 156-1112-00 | в010100 в0650 | | 80009 | 156-1112-00 |
| บ3050 | 156-1000-00 | | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| บ3050 | 156-1112-00 | | (8002A OPTION 45 ONLY) 22 MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ3050 | 156-1000-00 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3060 | 156-1112-00 | | and the second of the second o | 80009 | 156-1112-00 |
| บ3060 | 156-1000-00 | в050300 | (8001 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U3060 | 156-1112-00 | | 28 MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ3060 | 156-1000-00 | | MICROCIRCUIT,DI:4096 x 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| บ3060 | 156-1112-00 | в015112 в0560 | | 80009 | 156-1112-00 |
| บ3060 | 156-1000-00 | в056025 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U3060 | 156-1112-00 | в032000 в0727 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U3060 | 156-1000-00 | в072742 | (8002A ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| บ3060 | 156-1112-00 | в010100 в0650 | | 80009 | 156-1112-00 |
| บ3060 | 156-1000-00 | | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U3060 | 156-1112-00 | | (8002A OPTION 45 ONLY) 22 MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3060 | 156-1000-00 | в064023 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|------------------|--|-------------|-----------------|
| U3070 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U3070 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U3070 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3070 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U3070 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ3070 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ3070 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U3070 | 156-1000-00 | B072742 | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U3070 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3070 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U3070 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3070 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U3080 | 156-1112-00 | B010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U3080 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U3080 | 156-1112-00 | В015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3080 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U3080 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4096 x 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3080 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U3080 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U3080 | 156-1000-00 | B072742 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U3080 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3080 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U3080 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3080 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ3090 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U3090 | 156-0325-00 | в050300 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8001 ONLY) | 80009 | 156-0325-00 |
| บ3090 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ3090 | 156-0325-00 | в056029 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8001 OPTION 45 ONLY) | 80009 | 156-0325-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| U3090 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI:4096 x 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3090 | 156-0325-00 | в056025 | | MICROCIRCUIT, DI:DUAL 4-TO-1 IN DATA (8001 OPTION 49 ONLY) | 80009 | 156-0325-00 |
| U3090 | 156-1112-00 | в032000 | B072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U3090 | 156-0325-00 | B072742 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8002A ONLY) | 80009 | 156-0325-00 |
| บ3090 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ3090 | 156-0325-00 | в065056 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8002A OPTION 45 ONLY) | 80009 | 156-0325-00 |
| บ3090 | 156-1112-00 | в010100 | B064022 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ3090 | 156-0325-00 | в064023 | | MICROCIRCUIT, DI:DUAL 4-TO-1 IN DATA (8002A OPTION 49 ONLY) | 80009 | 156-0325-00 |
| U3100 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U3100 | 156-0089-00 | в050300 | | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER (8001 ONLY) | 80009 | 156-0089-00 |
| บ3100 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3100 | 156-0089-00 | в056029 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER (8001 OPTION 45 ONLY) | 80009 | 156-0089-00 |
| U3100 | 156-1112-00 | B015112 | в056024 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3100 | 156-0089-00 | в056025 | | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER (8001 OPTION 49 ONLY) | 80009 | 156-0089-00 |
| U3100 | 156-1112-00 | в032000 | B072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U3100 | 156-0089-00 | B072742 | | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER (8002A ONLY) | 80009 | 156-0089-00 |
| U3100 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U3100 | 156-0089-00 | в065056 | | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER (8002A OPTION 45 ONLY) | 80009 | 156-0089-00 |
| U3100 | 156-1112-00 | в010100 | B064022 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U3100 | 156-0089-00 | B064023 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER (8002A OPTION 49 ONLY) | 80009 | 156-0089-00 |
| U3110 | 156-1014-00 | хв050300 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 ONLY) | 80009 | 156-1014-00 |
| U3110 | 156-1014-00 | хв056029 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 OPTION 45 ONLY) | 80009 | 156-1014-00 |
| บ3110 | 156-1014-00 | хв056025 | | MICROCIRCUIT,DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 OPTION 49 ONLY) | 80009 | 156-1014-00 |
| U3110 | 156-1014-00 | XB072742 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A ONLY) | 80009 | 156-1014-00 |
| 03110 | 156-1014-00 | хв065056 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A OPTION 45 ONLY) | 80009 | 156-1014-00 |
| U3110 | 156-1014-00 | хв064023 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A OPTION 49 ONLY) | 80009 | 156-1014-00 |
| U3120 | 156-0321-00 | в010100 | в050299 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8001 ONLY) | 80009 | 156-0321-00 |
| U3120 | 156-0035-00 | в050300 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8001 ONLY) | 80009 | 156-0035-00 |

12-82

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|-----------------|
| U3120 | 156-0321-00 | | в056028 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8001 OPTION 45 ONLY) | 80009 | 156-0321-00 |
| U3120 | 156-0035-00 | в056029 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8001 OPTION 45 ONLY) | 80009 | 156-0035-00 |
| U3120 | 156-0321-00 | в015112 | в056024 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8001 OPTION 49 ONLY) | 80009 | 156-0321-00 |
| U3120 | 156-0035-00 | | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8001 OPTION 49 ONLY) | 80009 | 156-0035-00 |
| U3120 | 156-0321-00 | B032000 | B072741 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8002A ONLY) | 80009 | 156-0321-00 |
| U3120 | 156-0035-00 | B072742 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8002A ONLY) | 80009 | 156-0035-00 |
| U3120 | 156-0321-00 | | в065055 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8002A OPTION 45 ONLY) | 80009 | 156-0321-00 |
| U3120 | 156-0035-00 | в065056 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8002A OPTION 45 ONLY) | 80009 | 156-0035-00 |
| U3120 | 156-0321-00 | | в064022 | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE (8002A OPTION 49 ONLY) | 80009 | 156-0321-00 |
| U3120 | 156-0035-00 | | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| U3130 | 156-0693-00 | в010100 | в050299 | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER (8001 ONLY) | 01295 | SN74S139N |
| U3130 | 156-0462-00 | в050300 | | MICROCIRCUIT, DI: HEX SCHMITT TRIG, TTL (8001 ONLY) | 80009 | 156-0462-00 |
| U3130 | 156-0693-00 | | в056028 | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER (8001 OPTION 45 ONLY) | 01295 | sn74s139n |
| U3130 | 156-0462-00 | в056029 | | MICROCIRCUIT, DI:HEX SCHMITT TRIG, TTL (8001 OPTION 45 ONLY) | 80009 | 156-0462-00 |
| บ3130 | 156-0693-00 | | в056024 | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER (8001 OPTION 49 ONLY) | 01295 | SN74S139N |
| U3130 | 156-0462-00 | | | MICROCIRCUIT, DI: HEX SCHMITT TRIG, TTL (8001 OPTION 49 ONLY) | 80009 | 156-0462-00 |
| U3130 | 156-0693-00 | в032000 | в072741 | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER (8002A ONLY) | 01295 | SN74S139N |
| U3130 | 156-0462-00 | | | MICROCIRCUIT, DI: HEX SCHMITT TRIG, TTL (8002A ONLY) | 80009 | 156-0462-00 |
| U3130 | 156-0693-00 | в010100 | в065055 | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER | 01295 | SN74S139N |
| U3130 | 156-0462-00 | в065056 | | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI:HEX SCHMITT TRIG, TTL | 80009 | 156-0462-00 |
| U3130 | 156-0693-00 | | в064022 | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:DECODER/DEMULTIPLEXER (8002A OPTION 49 ONLY) | 01295 | sn74s139n |
| U3130 | 156-0462-00 | | | MICROCIRCUIT, DI: HEX SCHMITT TRIG, TTL (8002A OPTION 49 ONLY) | 80009 | 156-0462-00 |
| U3140 | 156-0385-00 | в010100 | в050299 | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| U3140 | 156-1014-00 | в050300 | | (8001 ONLY) MICROCIRCUIT,DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 ONLY) | 80009 | 156-1014-00 |
| U3140 | 156-0385-00 | в015112 | в056028 | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| U3140 | 156-1014-00 | | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK | 80009 | 156-1014-00 |
| U3140 | 156-0385-00 | B015112 | в056024 | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:HEX.INVERTER (8001 OPTION 49 ONLY) | 80009 | 156-0385-00 |
| U3140 | 156-1014-00 | | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 OPTION 49 ONLY) | 80009 | 156-1014-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| U3140 | 156-0385-00 | | в072741 | MICROCIRCUIT, DI: HEX. INVERTER (8002A ONLY) | 80009 | 156-0385-00 |
| U3140 | 156-1014-00 | | | MICROCIRCUIT,DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A ONLY) | 80009 | 156-1014-00 |
| U3140 | 156-0385-00 | в010100 | в065055 | MICROCIRCUIT, DI: HEX. INVERTER (8002A OPTION 45 ONLY) | 80009 | 156-0385-00 |
| U3140 | 156-1014-00 | в065056 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A OPTION 45 ONLY) | 80009 | 156-1014-00 |
| U3140 | 156-0385-00 | в010100 | в064022 | MICROCIRCUIT, DI: HEX. INVERTER (8002A OPTION 49 ONLY) | 80009 | 156-0385-00 |
| U3140 | 156-1014-00 | в064023 | | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A OPTION 49 ONLY) | 80009 | 156-1014-00 |
| U3150 | 156-0383-00 | в010100 | в050299 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8001 ONLY) | 80009 | 156-0383-00 |
| บ3150 | 156-0043-00 | в050300 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE (8001 ONLY) | 80009 | 156-0043-00 |
| บ3150 | 156-0383-00 | в015112 | в056028 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8001 OPTION 45 ONLY) | 80009 | 156-0383-00 |
| U3150 | 156-0043-00 | в056029 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE (8001 OPTION 45 ONLY) | 80009 | 156-0043-00 |
| U3150 | 156-0383-00 | B015112 | в056024 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8001 OPTION 49 ONLY) | 80009 | 156-0383-00 |
| U3150 | 156-0043-00 | в056025 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE (8001 OPTION 49 ONLY) | 80009 | 156-0043-00 |
| U3150 | 156-0383-00 | в032000 | B072741 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8002A ONLY) | 80009 | 156-0383-00 |
| U3150 | 156-0043-00 | B072742 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE (8002A ONLY) | 80009 | 156-0043-00 |
| U3150 | 156-0383-00 | в010100 | в065055 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8002A OPTION 45 ONLY) | 80009 | 156-0383-00 |
| U3150 | 156-0043-00 | в065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE (8002A OPTION 45 ONLY) | 80009 | 156-0043-00 |
| U3150 | 156-0383-00 | в010100 | B064022 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8002A OPTION 49 ONLY) | 80009 | 156-0383-00 |
| U3150 | 156-0043-00 | в064023 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE (8002A OPTION 49 ONLY) | 80009 | 156-0043-00 |
| U3160 | 156-0118-00 | B010100 | в050299 | MICROCIRCUIT,DI:J-K MASTER-SLAVE FLIP-FLOP (8001 ONLY) | 80009 | 156-0118-00 |
| U3160 | 156-1015-00 | в050300 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8001 ONLY) | 80009 | 156-1015-00 |
| U3160 | 156-0118-00 | в015112 | в056028 | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8001 OPTION 45 ONLY) | 80009 | 156-0118-00 |
| U3160 | 156-1015-00 | в056029 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3160 | 156-0118-00 | в015112 | в056024 | (8001 OPTION 45 ONLY) MICROCIRCUIT,DI:J-K MASTER-SLAVE FLIP-FLOP (8001 OPTION 49 ONLY) | 80009 | 156-0118-00 |
| U3160 | 156-1015-00 | в056025 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8001 OPTION 49 ONLY) | 80009 | 156-1015-00 |
| บ3160 | 156-0118-00 | в032000 | в072741 | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8002A ONLY) | 80009 | 156-0118-00 |
| U3160 | 156-1015-00 | в072742 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8002A ONLY) | 80009 | 156-1015-00 |
| U3160 | 156-0118-00 | в010100 | в065055 | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0118-00 |
| U3160 | 156-1015-00 | в065056 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIG FF (8002A OPTION 45 ONLY) | 80009 | 156-1015-00 |

12-84 @ JUN 1981

| | | | | • | | |
|---------|-------------------------------|-------------------|-------------------|---|-------------|-----------------|
| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
| U3160 | 156-0118-00 | в010100 | В064022 | MICROCIRCUIT, DI:J-K MASTER-SLAVE FLIP-FLOP | 80009 | 156-0118-00 |
| บ3160 | 156-1015-00 | в064023 | | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:DUAL J-K EDGE TRIG FF | 80009 | 156-1015-00 |
| U3170 | 156-0118-00 | в010100 | в050299 | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:J-K MASTER-SLAVE FLIP-FLOP (8001 ONLY) | 80009 | 156-0118-00 |
| บ3170 | 156-0405-00 | в050300 | | MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV (8001 ONLY) | 07263 | 9602 (PC OR DC) |
| U3170 | 156-0118-00 | в015112 | в056028 | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP | 80009 | 156-0118-00 |
| U3170 | 156-0405-00 | в056029 | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV (8001 OPTION 45 ONLY) | 07263 | 9602 (PC OR DC) |
| U3170 | 156-0118-00 | в015112 | в056024 | MICROCIRCUIT,DI:J-K MASTER-SLAVE FLIP-FLOP (8001 OPTION 49 ONLY) | 80009 | 156-0118-00 |
| U3170 | 156-0405-00 | в056025 | | MICROCIRCUIT, DI:DUAL RETRIG MONOSTABLE MV (8001 OPTION 49 ONLY) | 07263 | 9602 (PC OR DC) |
| U3170 | 156-0118-00 | в032000 | в072741 | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8002A ONLY) | 80009 | 156-0118-00 |
| U3170 | 156-0405-00 | в072742 | | MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV (8002A ONLY) | 07263 | 9602 (PC OR DC) |
| U3170 | 156-0118-00 | B010100 | в065055 | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0118-00 |
| U3170 | 156-0405-00 | в065056 | | MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV (8002A OPTION 45 ONLY) | 07263 | 9602 (PC OR DC) |
| U3170 | 156-0118-00 | в010100 | в064022 | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP (8002A OPTION 49 ONLY) | 80009 | 156-0118-00 |
| บ3170 | 156-0405-00 | в064023 | | MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV | 07263 | 9602 (PC OR DC) |
| U3180 | 156-1059-00 | в010100 | B050299X | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:DUAL J-K EDGE TRIGGERED FF (8001 ONLY) | 80009 | 156-1059-00 |
| U3180 | 156-1059-00 | в015112 | B056028X | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8001 OPTION 45 ONLY) | 80009 | 156-1059-00 |
| บ3180 | 156-1059-00 | в015112 | B056024X | MICROCIRCUIT,DI:DUAL J-K EDGE TRIGGERED FF (8001 OPTION 49 ONLY) | 80009 | 156-1059-00 |
| U3180 | 156-1059-00 | в032000 | B072741X | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A ONLY) | 80009 | 156-1059-00 |
| U3180 | 156-1059-00 | в010100 | в065055х | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A OPTION 45 ONLY) | 80009 | 156-1059-00 |
| U3180 | 156-1059-00 | в010100 | B065022X | | 80009 | 156-1059-00 |
| U4000 | 156-1000-00 | хв050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U4000 | 156-1000-00 | хв056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| บ4000 | 156-1000-00 | хв056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4000 | 156-1000-00 | XB072742 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| บ4000 | 156-1000-00 | хв065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| บ4000 | 156-1000-00 | хв064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4010 | 156-1000-00 | хв050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U4010 | 156-1000-00 | хв056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|-----------------|
| U4010 | 156-1000-00 | ХВ056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4010 | 156-1000-00 | XB072742 | | (8001 OPTION 49 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4010 | 156-1000-00 | хв065056 | | (8002A ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4010 | 156-1000-00 | хв064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4020 | 156-1112-00 | в010100 | B050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U4020 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U4020 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4020 | 156-1000-00 | | | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4020 | 156-1112-00 | | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4020 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4020 | 156-1112-00 | в032000 | B072741 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U4020 | 156-1000-00 | в072742 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U4020 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4020 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4020 | 156-1112-00 | в010100 | B064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4020 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4030 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ4030 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U4030 | 156-1112-00 | B015112 | в056028 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U4030 | 156-1000-00 | в056029 | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4030 | 156-1112-00 | в015112 | B056024 | (8001 OPTION 45 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4030 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4030 | 156-1112-00 | в032000 | B072741 | (8001 OPTION 49 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U4030 | 156-1000-00 | в072742 | | (8002A ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U4030 | 156-1112-00 | B010100 | B065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U4030 | 156-1000-00 | | | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4030 | 156-1112-00 | | B064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4030 | 156-1000-00 | B064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |

12-86 @ JUN 1981

| Ckt No. | Tektronix Part N o. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|-------------------|------------------|--|-------------|-----------------|
| U4040 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U4040 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U4040 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4040 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4040 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI:4096 x 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4040 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4040 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U4040 | 156-1000-00 | в072742 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U4040 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4040 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4040 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4040 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4050 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ4050 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| บ4050 | 156-1112-00 | B015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ4050 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4050 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ4050 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ4050 | 156-1112-00 | в032000 | B072741 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| บ4050 | 156-1000-00 | в072742 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| บ4050 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4050 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4050 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4050 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4060 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| 114060 | 156-1000-00 | в050300 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U4060 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ4060 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | del No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| U4060 | 156-1112-00 | | в056024 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4060 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4060 | 156-1112-00 | B032000 | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U4060 | 156-1000-00 | | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U4060 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4060 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| บ4060 | 156-1112-00 | | B064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ4060 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4070 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ4070 | 156-1000-00 | | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U4070 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4070 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4070 | 156-1112-00 | | в056024 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ4070 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ4070 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U4070 | 156-1000-00 | | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |
| U4070 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4070 | 156-1000-00 | в065056 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4070 | 156-1112-00 | B010100 | в064022 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4070 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4080 | 156-1112-00 | | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U4080 | 156-1000-00 | | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1000-00 |
| U4080 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4080 | 156-1000-00 | в056029 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1000-00 |
| U4080 | 156-1112-00 | | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4080 | 156-1000-00 | в056025 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1000-00 |
| บ4080 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U4080 | 156-1000-00 | в072742 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1000-00 |

12-88 @ JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|--|-------------|-----------------|
| U4080 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U4080 | 156-1000-00 | в065056 | | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1000-00 |
| U4080 | 156-1112-00 | в010100 | в064022 | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:4096 x 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4080 | 156-1000-00 | в064023 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1000-00 |
| U4090 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ4090 | 156-0325-00 | в050300 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8001 ONLY) | 80009 | 156-0325-00 |
| U4090 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4090 | 156-0325-00 | в056029 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8001 OPTION 45 ONLY) | 80009 | 156-0325-00 |
| บ4090 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ4090 | 156-0325-00 | в056025 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8001 OPTION 49 ONLY) | 80009 | 156-0325-00 |
| บ4090 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U4090 | 156-0325-00 | B072742 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8002A ONLY) | 80009 | 156-0325-00 |
| U4090 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4090 | 156-0325-00 | в065056 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8002A OPTION 45 ONLY) | 80009 | 156-0325-00 |
| บ4090 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ4090 | 156-0325-00 | B064023 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8002A OPTION 49 ONLY) | 80009 | 156-0325-00 |
| U4100 | 156-1112-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U4100 | 156-0089-00 | в050300 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER (8001 ONLY) | 80009 | 156-0089-00 |
| U4100 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4100 | 156-0089-00 | в056029 | | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER (8001 OPTION 45 ONLY) | 80009 | 156-0089-00 |
| U4100 | 156-1112-00 | в015112 | в056024 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4100 | 156-0089-00 | в056025 | | MICROCIRCUIT, DI:4-BIT UP/DOWN COUNTER (8001 OPTION 49 ONLY) | 80009 | 156-0089-00 |
| U4100 | 156-1112-00 | в032000 | B072741 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U4100 | 156-0089-00 | в072742 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER (8002A ONLY) | 80009 | 156-0089-00 |
| U4100 | 156-1112-00 | B010100 | в065055 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U4100 | 156-0089-00 | в065056 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER (8002A OPTION 45 ONLY) | 80009 | 156-0089-00 |
| U4100 | 156-1112-00 | в010100 | в064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U4100 | 156-0089-00 | в064023 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER (8002A OPTION 49 ONLY) | 80009 | 156-0089-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|---|-------------|-----------------|
| U4110 | 156-0948-00 | | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP (8001 ONLY) | 80009 | 156-0948-00 |
| U4110 | 156-0948-00 | XB056029 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U4110 | 156-0948-00 | | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8001 OPTION 49 ONLY) | 80009 | 156-0948-00 |
| U4110 | 156-0948-00 | XB072742 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP (8002A ONLY) | 80009 | 156-0948-00 |
| U4110 | 156-0948-00 | | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U4110 | 156-0948-00 | | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP (8002A OPTION 49 ONLY) | 80009 | 156-0948-00 |
| U4120 | 156-0965-00 | в010100 | в050299 | MICROCIRCUIT, DI:ADRS MUX & REFRESH CNTR | 04713 | MC3242AL |
| U4120 | 156-0996-00 | | | (8001 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4120 | 156-0965-00 | | в056028 | (8001 ONLY) MICROCIRCUIT, DI: ADRS MUX & REFRESH CNTR (8001 OPTION 45 ONLY) | 04713 | MC3242AL |
| U4120 | 156-0996-00 | в056029 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4120 | 156-0965-00 | | в056024 | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI: ADRS MUX & REFRESH CNTR (8001 OPTION 49 ONLY) | 04713 | MC3242AL |
| U4120 | 156-0996-00 | | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR (8001 OPTION 49 ONLY) | 18324 | 8T26AF |
| U4120 | 156-0965-00 | | B072741 | MICROCIRCUIT, DI:ADRS MUX & REFRESH CNTR | 04713 | MC3242AL |
| U4120 | 156-0996-00 | B072742 | | (8002A ONLY) MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR (8002A ONLY) | 18324 | 8T26AF |
| U4120 | 156-0965-00 | | в065055 | MICROCIRCUIT, DI: ADRS MUX & REFRESH CNTR (8002A OPTION 45 ONLY) | 04713 | MC3242AL |
| U4120 | 156-0996-00 | | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4120 | 156-0965-00 | | B064022 | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI:ADRS MUX & REFRESH CNTR | 04713 | MC3242AL |
| U4120 | 156-0996-00 | в064023 | | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR (8002A OPTION 49 ONLY) | 18324 | 8T26AF |
| U4130 | 156-0996-00 | | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4130 | 156-0996-00 | | | (8001 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4130 | 156-0996-00 | ХВ056025 | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 OPTION 49 ONLY) | 18324 | 8T26AF |
| U4130 | 156-0996-00 | XB072742 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4130 | 156-0996-00 | XB065056 | | (8002A ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4130 | 156-0996-00 | | | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8002A OPTION 49 ONLY) | 18324 | 8T26AF |
| U4140 | 156-0996-00 | хв050300 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4140 | 156-0996-00 | | | (8001 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4140 | 156-0996-00 | | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 OPTION 49 ONLY) | 18324 | 8T26AF |
| U4140 | 156-0996-00 | хв072742 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8002A ONLY) | 18324 | 8T26AF |

| Ckt No. | Tektronix Part N o. | Serial/Mode Eff | l No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|--------------------|-----------------|---|-------------|-----------------|
| U4140 | 156-0996-00 | хв065056 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR (8002A OPTION 45 ONLY) | 18324 | 8T26AF |
| U4140 | 156-0996-00 | хв064023 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8002A OPTION 49 ONLY) | 18324 | 8T26AF |
| บ4150 | 156-1041-00 | в010100 | в050299 | MICROCIRCUIT, DI: 4 BIT MAGNITUDE COMPARATOR (8001 ONLY) | 80009 | 156-1041-00 |
| U4150 | 156-0323-00 | в050300 | | MICROCIRCUIT, DI: HEX. INVERTER (8001 ONLY) | 01295 | SN74S04N |
| U4150 | 156-1041-00 | B015112 | в056028 | MICROCIRCUIT, DI: 4 BIT MAGNITUDE COMPARATOR (8001 OPTION 45 ONLY) | 80009 | 156-1041-00 |
| U4150 | 156-0323-00 | в056029 | | MICROCIRCUIT, DI: HEX. INVERTER (8001 OPTION 45 ONLY) | 01295 | SN74S04N |
| U4150 | 156-1041-00 | в015112 | в056024 | MICROCIRCUIT, DI: 4 BIT MAGNITUDE COMPARATOR (8001 OPTION 49 ONLY) | 80009 | 156-1041-00 |
| U4150 | 156-0323-00 | в056025 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U4150 | 156-1041-00 | в032000 | В072741 | (8001 OPTION 49 ONLY) MICROCIRCUIT,DI:4 BIT MAGNITUDE COMPARATOR (8002A ONLY) | 80009 | 156-1041-00 |
| U4150 | 156-0323-00 | в072742 | | MICROCIRCUIT, DI:HEX. INVERTER | 01295 | SN74S04N |
| U4150 | 156-1041-00 | в010100 1 | в065055 | (8002A ONLY) MICROCLECUIT, DI: 4 BIT MAGNITUDE COMPARATOR | 80009 | 156-1041-00 |
| U4150 | 156-0323-00 | в065056 | | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI: HEX. INVERTER (8002A OPTION 45 ONLY) | 01295 | SN74S04N |
| U4150 | 156-1041-00 | во10100 | B064022 | MICROCIRCUIT, DI:4 BIT MAGNITUDE COMPARATOR | 80009 | 156-1041-00 |
| U4150 | 156-0323-00 | в064023 | | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI:HEX. INVERTER | 01295 | SN74S04N |
| U4160 | 156-0530-00 | в010100 г | в050299х | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 ONLY) | 80009 | 156-0530-00 |
| U4160 | 156-0530-00 | во15112 г | B056028X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| U4160 | 156-0530-00 | в015112 г | B056024X | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:QUAD 2-INP MUX,16 PIN DIP | 80009 | 156-0530-00 |
| U4160 | 156-0530-00 | в032000 г | B072741X | (8001 OPTION 49 ONLY) MICROCIRCUIT,DI:QUAD 2-INP MUX,16 PIN DIP (8002A ONLY) | 80009 | 156-0530-00 |
| U4160 | 156-0530-00 | в010100 н | в065055х | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 45 ONLY) | 80009 | 156-0530-00 |
| U4160 | 156-0530-00 | в010100 г | B064022X | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U4170 | 156-0985-00 | во10100 г | в050299 | MICROCIRCUIT, DI: DUAL 5-INPUT NOR GATE (8001 ONLY) | 18324 | N74LS260AN OR J |
| U4170 | 156-0043-00 | в050300 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| U4170 | 156-0985-00 | в015112 н | в056028 | (8001 ONLY) MICROCIRCUIT, DI: DUAL 5-INPUT NOR GATE | 18324 | N74LS260AN OR J |
| U4170 | 156-0043-00 | в056029 | | (8001 OPTION 45 ONLY) MICROCIRCUIT,DI:QUAD 2-INPUT POS NOR GATE (8001 OPTION 45 ONLY) | 80009 | 156-0043-00 |
| U4170 | 156-0985-00 | В015112 Е | в056024 | MICROCIRCUIT, DI:DUAL 5-INPUT NOR GATE | 18324 | N74LS260AN OR J |
| U4170 | 156-0043-00 | в056025 | | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE | 80009 | 156-0043-00 |
| U4170 | 156-0985-00 | B032000 E | 3072741 | (8001 OPTION 49 ONLY) MICROCIRCUIT,DI:DUAL 5-INPUT NOR GATE (8002A ONLY) | 18324 | N74LS260AN OR J |
| U4170 | 156-0043-00 | B072742 | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE (8002A ONLY) | 80009 | 156-0043-00 |

| Ckt No. | Tektronix Part N o. | Serial/Mode Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------------------------|--------------------|------------------|---|-------------|-----------------|
| U4170 | 156-0985-00 | | в065055 | MICROCIRCUIT, DI: DUAL 5-INPUT NOR GATE (8002A OPTION 45 ONLY) | 18324 | N74LS260AN OR J |
| U4170 | 156-0043-00 | в065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT POS NOR GATE (8002A OPTION 45 ONLY) | 80009 | 156-0043-00 |
| U4170 | 156-0985-00 | в010100 | в064022 | MICROCIRCUIT, DI: DUAL 5-INPUT NOR GATE (8002A OPTION 49 ONLY) | 18324 | N74LS260AN OR J |
| U4170 | 156-0043-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT POS NOR GATE (8002A OPTION 49 ONLY) | 80009 | 156-0043-00 |
| U4180 | 156-0804-00 | | в050299х | | 07263 | 74LS279PC |
| U4180 | 156-0804-00 | | B056028X | MICROCIRCUIT, DI: QUADRUPLE S-R LATCH (8001 OPTION 45 ONLY) | 07263 | 74LS279PC |
| U4180 | 156-0804-00 | B015112 | B056024X | MICROCIRCUIT, DI: QUADRUPLE S-R LATCH (8001 OPTION 49 ONLY) | 07263 | 74LS279PC |
| U4180 | 156-0804-00 | | B072741X | MICROCIRCUIT, DI:QUADRUPLE S-R LATCH (8002A ONLY) | 07263 | 74LS279PC |
| U4180 | 156-0804-00 | | в065055х | MICROCIRCUIT, DI: QUADRUPLE S-R LATCH (8002A OPTION 45 ONLY) | 07263 | 74LS279PC |
| U4180 | 156-0804-00 | в010100 | B064022X | MICROCIRCUIT, DI: QUADRUPLE S-R LATCH (8002A OPTION 49 ONLY) | 07263 | 74LS279PC |
| บ5020 | 156-1112-00 | | в050299Х | | 80009 | 156-1112-00 |
| บ5020 | 156-1112-00 | | B056028X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ5020 | 156-1112-00 | | в056024х | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U5020 | 156-1112-00 | | B072741X | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| บ5020 | 156-1112-00 | в010100 | в065055х | | 80009 | 156-1112-00 |
| บ5020 | 156-1112-00 | в010100 | B064022X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U5030 | 156-1112-00 | B010100 | в050299х | | 80009 | 156-1112-00 |
| บ5030 | 156-1112-00 | в015112 | B056028X | | 80009 | 156-1112-00 |
| บ5030 | 156-1112-00 | в015112 | B056024X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| บ5030 | 156-1112-00 | в032000 | в072741х | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| บ5030 | 156-1112-00 | в010100 | в065055Х | (8002A ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ5030 | 156-1112-00 | в010100 | B064022X | | 80009 | 156-1112-00 |
| บ5040 | 156-1112-00 | в010100 | в050299х | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ5040 | 156-1112-00 | в015112 | B056028X | | 80009 | 156-1112-00 |
| บ5040 | 156-1112-00 | в015112 | B056024X | MICROCIRCUIT, D1:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U5040 | 156-1112-00 | в032000 | B072741X | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| บ5040 | 156-1112-00 | в032000 | B072741X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| บ5040 | 156-1112-00 | в010100 | в065055Х | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|-----------------|
| บ5040 | 156-1112-00 | | B064022X | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5050 | 156-1112-00 | B010100 | в050299Х | | 80009 | 156-1112-00 |
| บ5050 | 156-1112-00 | в015112 | в056028Х | | 80009 | 156-1112-00 |
| บ5050 | 156-1112-00 | | B056024X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5050 | 156-1112-00 | в032000 | B072741X | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| บ5050 | 156-1112-00 | | в065055х | , | 80009 | 156-1112-00 |
| บ5050 | 156-1112-00 | | B064022X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5060 | 156-1112-00 | B010100 | в050299х | | 80009 | 156-1112-00 |
| บ5060 | 156-1112-00 | в015112 | B056028X | | 80009 | 156-1112-00 |
| บ5060 | 156-1112-00 | | B056024X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5060 | 156-1112-00 | в032000 | B072741X | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U5060 | 156-1112-00 | | в065055х | | 80009 | 156-1112-00 |
| U5060 | 156-1112-00 | | B064022X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5070 | 156-1112-00 | | в050299х | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U5070 | 156-1112-00 | | B056028X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ5070 | 156-1112-00 | | B056024X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5070 | 156-1112-00 | | B072741X | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| บ5070 | 156-1112-00 | B010100 | в065055х | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ5070 | 156-1112-00 | в010100 | B064022X | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5080 | 156-1112-00 | в010100 | в050299Х | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U5080· | 156-1112-00 | | B056028X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ5080 | 156-1112-00 | | B056024X | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5080 | 156-1112-00 | в032000 | B072741X | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| บ5080 | 156-1112-00 | B010100 | в065055х | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| บ5080 | 156-1112-00 | B010100 | B064022X | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5090 | 156-1112-00 | | в050299 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| บ5090 | 156-0325-00 | | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8001 ONLY) | 80009 | 156-0325-00 |
| บ5090 | 156-1112-00 | R015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | lel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|-----------------|
| U5090 | 156-0325-00 | | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8001 OPTION 45 ONLY) | 80009 | 156-0325-00 |
| บ5090 | 156-1112-00 | | в056024 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5090 | 156-0325-00 | в056025 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8001 OPTION 49 ONLY) | 80009 | 156-0325-00 |
| บ5090 | 156-1112-00 | в032000 | в072741 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| บ5090 | 156-0325-00 | В072742 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8002A ONLY) | 80009 | 156-0325-00 |
| บ5090 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| 115090 | 156-0325-00 | в065056 | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8002A OPTION 45 ONLY) | 80009 | 156-0325-00 |
| บ5090 | 156-1112-00 | | B064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| บ5090 | 156-0325-00 | | | MICROCIRCUIT, DI: DUAL 4-TO-1 IN DATA (8002A OPTION 49 ONLY) | 80009 | 156-0325-00 |
| U5100 | 156-1112-00 | B010100 | в050299 | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM (8001 ONLY) | 80009 | 156-1112-00 |
| U5100 | 156-0125-00 | в050300 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8001 ONLY) | 80009 | 156-0125-00 |
| U5100 | 156-1112-00 | в015112 | в056028 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U5100 | 156-0125-00 | в056029 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX (8001 OPTION 45 ONLY) | 80009 | 156-0125-00 |
| U5100 | 156-1112-00 | B015112 | в056024 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8001 OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U5100 | 156-0125-00 | в056025 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8001 OPTION 49 ONLY) | 80009 | 156-0125-00 |
| U5100 | 156-1112-00 | в032000 | B072741 | MICROCIRCUIT,DI:4096 X 1 DYNAMIC RAM (8002A ONLY) | 80009 | 156-1112-00 |
| U5100 | 156-0125-00 | в072742 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A ONLY) | 80009 | 156-0125-00 |
| U5100 | 156-1112-00 | в010100 | в065055 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 45 ONLY) | 80009 | 156-1112-00 |
| U5100 | 156-0125-00 | в065056 | | MICROCIRCUIT, DI: QUAD 2-INPUT MUX (8002A OPTION 45 ONLY) | 80009 | 156-0125-00 |
| บ5100 | 156-1112-00 | B010100 | B064022 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM (8002A OPTION 49 ONLY) | 80009 | 156-1112-00 |
| U5100 | 156-0125-00 | в064023 | | MICROCIRCUIT, DI:QUAD 2-INPUT MUX (8002A OPTION 49 ONLY) | 80009 | 156-0125-00 |
| U5110 | 156-0948-00 | XB050300 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP (8001 ONLY) | 80009 | 156-0948-00 |
| U5110 | 156-0948-00 | XB056029 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8001 OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U5110 | 156-0948-00 | хв056025 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8001 OPTION 49 ONLY) | 80009 | 156-0948-00 |
| U5110 | 156-0948-00 | XB072742 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U5110 | 156-0948-00 | XB065056 | | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U5110 | 156-0948-00 | XB065023 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP (8002A OPTION 49 ONLY) | 80009 | 156-0948-00 |
| U5120 | 156-0996-00 | хв050300 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 ONLY) | 18324 | 8T26AF |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | iel No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|-------------------|---|-------------|-----------------|
| U5120 | 156-0996-00 | | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5120 | 156-0996-00 | XB056025 | | (8001 OPTION 45 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5120 | 156-0996-00 | XB072742 | | (8001 OPTION 49 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR (8002A ONLY) | 18324 | 8T26AF |
| U5120 | 156-0996-00 | | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5120 | 156-0996-00 | XB064023 | | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ5130 | 156-0996-00 | хв050300 | | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 ONLY) | 18324 | 8T26AF |
| U5130 | 156-0996-00 | | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5130 | 156-0996-00 | XB056025 | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ5130 | 156-0996-00 | XB072742 | | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8002A ONLY) | 18324 | 8T26AF |
| U5130 | 156-0996-00 | | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5130 | 156-0996-00 | хв064023 | | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U5140 | 156-0153-00 | в010100 | в050299 | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8001 ONLY) | 01295 | SN7406N |
| U5140 | 156-0391-00 | | | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR (8001 ONLY) | 04713 | 74LS174(N OR J) |
| U5140 | 156-0153-00 | B015112 | в056028 | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8001 OPTION 45 ONLY) | 01295 | SN7406N |
| U5140 | 156-0391-00 | в056029 | | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR (8001 OPTION 45 ONLY) | 04713 | 74LS174(N OR J) |
| U5140 | 156-0153-00 | | в056024 | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8001 OPTION 49 ONLY) | 01295 | SN7406N |
| U5140 | 156-0391-00 | в056025 | | MICROCIRCUIT,DI:HEX LATCH WITH CLEAR (8001 OPTION 49 ONLY) | 04713 | 74LS174(N OR J) |
| U5140 | 156-0153-00 | в032000 | в072741 | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8002A ONLY) | 01295 | SN7406N |
| U5140 | 156-0391-00 | | | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR (8002A ONLY) | 04713 | 74LS174(N OR J) |
| U5140 | 156-0153-00 | B010100 | в065055 | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8002A OPTION 45 ONLY) | 01295 | SN7406N |
| U5140 | 156-0391-00 | в065056 | | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR (8002A OPTION 45 ONLY) | 04713 | 74LS174(N OR J) |
| U5140 | 156-0153-00 | в010100 | в064022 | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8002A OPTION 49 ONLY) | 01295 | sn7406n |
| U5140 | 156-0391-00 | в064023 | | MICROCIRCUIT, DI: HEX LATCH WITH CLEAR (8002A OPTION 49 ONLY) | 04713 | 74LS174(N OR J) |
| บ5150 | 156-0530-00 | в010100 | в050299 | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8001 ONLY) | 80009 | 156-0530-00 |
| U5150 | 156-0990-00 | в050300 | | MICROCIRCUIT, DI:QUAD 2-INPUT EXCL OR GATE (8001 ONLY) | 80009 | 156-0990-00 |
| บ5150 | 156-0530-00 | B015112 | в056028 | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 OPTION 45 ONLY) | 80009 | 156-0530-00 |
| บ5150 | 156-0990-00 | в056029 | | MICROCIRCUIT, DI:QUAD 2-INPUT EXCL OR GATE (8001 OPTION 45 ONLY) | 80009 | 156-0990-00 |
| U5150 | 156-0530-00 | B015112 | в056024 | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 OPTION 49 ONLY) | 80009 | 156-0530-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|-----------------|
| U5150 | 156-0990-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT EXCL OR GATE | 80009 | 156-0990-00 |
| U5150 | 156-0530-00 | в032000 | в072741 | (8001 OPTION 49 ONLY) MICROCIRCUIT,DI:QUAD 2-INP MUX,16 PIN DIP (8002A ONLY) | 80009 | 156-0530-00 |
| บ5150 | 156-0990-00 | B072742 | | MICROCIRCUIT, DI: QUAD 2-INPUT EXCL OR GATE (8002A ONLY) | 80009 | 156-0990-00 |
| บ5150 | 156-0530-00 | | в065055 | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 45 ONLY) | 80009 | 156-0530-00 |
| U5150 | 156-0990-00 | в065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT EXCL OR GATE (8002A OPTION 45 ONLY) | 80009 | 156-0990-00 |
| บ5150 | 156-0530-00 | | в064022 | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U5150 | 156-0990-00 | | | MICROCIRCUIT, DI:QUAD 2-INPUT EXCL OR GATE (8002A OPTION 49 ONLY) | 80009 | 156-0990-00 |
| U5160 | 156-1059-00 | | в050299 | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8001 ONLY) | 80009 | 156-1059-00 |
| U5160 | 156-0180-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8001 ONLY) | 01295 | SN74S00(N OR J) |
| บ5160 | 156-1059-00 | | в056028 | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8001 OPTION 45 ONLY) | 80009 | 156-1059-00 |
| U5160 | 156-0180-00 | в056029 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| บ5160 | 156-1059-00 | | в056024 | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8001 OPTION 49 ONLY) | 80009 | 156-1059-00 |
| U5160 | 156-0180-00 | | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U5160 | 156-1059-00 | | в072741 | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A ONLY) | 80009 | 156-1059-00 |
| U5160 | 156-0180-00 | | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A ONLY) | 01295 | SN74S00(N OR J) |
| U5160 | 156-1059-00 | | в065055 | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A OPTION 45 ONLY) | 80009 | 156-1059-00 |
| U5160 | 156-0180-00 | в065056 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| U5160 | 156-1059-00 | | в064022 | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A OPTION 49 ONLY) | 80009 | 156-1059-00 |
| U5160 | 156-0180-00 | | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U5170 | 156-0383-00 | | в050299 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8001 ONLY) | 80009 | 156-0383-00 |
| U5170 | 156-0153-00 | | | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8001 ONLY) | 01295 | SN7406N |
| U5170 | 156-0383-00 | | в056028 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8001 OPTION 45 ONLY) | 80009 | 156-0383-00 |
| U5170 | 156-0153-00 | | | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8001 OPTION 45 ONLY) | 01295 | SN7406N |
| บ5170 | 156-0383-00 | | в056024 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8001 OPTION 49 ONLY) | 80009 | 156-0383-00 |
| U5170 | 156-0153-00 | | | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8001 OPTION 49 ONLY) | 01295 | SN7406N |
| U5170 | 156-0383-00 | в032000 | в072741 | MICROCIRCUIT, DI:QUAD 2-INPUT NOR GATE (8002A ONLY) | 80009 | 156-0383-00 |
| U5170 | 156-0153-00 | | | MICROCIRCUIT, DI: HEX INVERTER, BUFFER (8002A ONLY) | 01295 | SN7406N |
| U5170 | 156-0383-00 | | в065055 | MICROCIRCUIT, DI: QUAD 2-INPUT NOR GATE (8002A OPTION 45 ONLY) | 80009 | 156-0383-00 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|--|-------------|------------------|
| U5170 | 156-0153-00 | | | MICROCIRCUIT, DI:HEX INVERTER, BUFFER (8002A OPTION 45 ONLY) | 01295 | SN7406N |
| U5170 | 156-0383-00 | | в064022 | MICROCIRCUIT, DI: QUAD 2-INPUT NOR GATE | 80009 | 156-0383-00 |
| บ5170 | 156-0153-00 | | | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI:HEX INVERTER, BUFFER (8002A OPTION 49 ONLY) | 01295 | SN7406N |
| บ5180 | 156-0480-00 | | в050299Х | MICROCIRCUIT, DI:QUAD 2-INPUT AND GATE (8001 ONLY) | 01295 | SN74LS08(N OR J) |
| U5180 | 156-0480-00 | в015112 | в056028х | MICROCIRCUIT, DI:QUAD 2-INPUT AND GATE (8001 OPTION 45 ONLY) | 01295 | SN74LS08(N OR J) |
| U5180 | 156-0480-00 | в015112 | в056024Х | MICROCIRCUIT, DI:QUAD 2-INPUT AND GATE (8001 OPTION 49 ONLY) | 01295 | SN74LS08(N OR J) |
| U5180 | 156-0480-00 | в032000 | B072741X | MICROCIRCUIT, DI:QUAD 2-INPUT AND GATE (8002A ONLY) | 01295 | SN74LSO8(N OR J) |
| บ5180 | 156-0480-00 | | в065055х | MICROCIRCUIT, DI: QUAD 2-INPUT AND GATE (8002A OPTION 45 ONLY) | 01295 | SN74LS08(N OR J) |
| บ5180 | 156-0480-00 | | B064022X | MICROCIRCUIT, DI: QUAD 2-INPUT AND GATE (8002A OPTION 49 ONLY) | 01295 | SN74LSO8(N OR J) |
| U6020 | 156-1014-00 | в010100 | в050299х | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 ONLY) | 80009 | 156-1014-00 |
| บ6020 | 156-1014-00 | B015112 | B056028X | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 OPTION 45 ONLY) | 80009 | 156-1014-00 |
| U6020 | 156-1014-00 | в015112 | B056024X | MICROCIRCUIT, DI: 9 BIT ODD/EVEN PTY GEN/CHK (8001 OPTION 49 ONLY) | 80009 | 156-1014-00 |
| U6020 | 156-1014-00 | в032000 | B072741X | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK | 80009 | 156-1014-00 |
| U6020 | 156-1014-00 | в010100 | B065055X | (8002A ONLY) MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK | 80009 | 156-1014-00 |
| U6020 | 156-1014-00 | в010100 | B064022X | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A OPTION 49 ONLY) | 80009 | 156-1014-00 |
| U6030 | 156-0948-00 | в010100 | в050299 | MICROCIRCUIT, DI:QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U6030 | 156-0323-00 | в050300 | | (8001 ONLY) MICROCIRCUIT, DI:HEX. INVERTER | 01295 | SN74S04N |
| U6030 | 156-0948-00 | в015112 | в056028 | (8001 ONLY) MICROCIRCUIT, DI: QUAD D FLIP-FLOP (8001 OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U6030 | 156-0323-00 | в056029 | | MICROCIRCUIT, DI:HEX. INVERTER | 01295 | sn74s04n |
| U6030 | 156-0948-00 | B015112 | в056024 | (8001 OPTION 45 ONLY) MICROCIRCUIT,DI:QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U6030 | 156-0323-00 | в056025 | | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI:HEX. INVERTER (8001 OPTION 49 ONLY) | 01295 | SN74S04N |
| U6030 | 156-0948-00 | в032000 | В072741 | MICROCIRCUIT, DI:QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U6030 | 156-0323-00 | в072742 | | (8002A ONLY) MICROCIRCUIT, DI:HEX. INVERTER | 01295 | SN74S04N |
| U6030 | 156-0948-00 | в010100 | в065055 | (8002A ONLY) MICROCIRCUIT,DI:QUAD D FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U6030 | 156-0323-00 | в065056 | | MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| U6030 | 156-0948-00 | в010100 | в064022 | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U6030 | 156-0948-00 | B064023 | | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8002A OPTION 49 ONLY) | 80009 | 156-0948-00 |
| U6040 | 156-0948-00 | в010100 | в050299 | MICROCIRCUIT, DI: QUAD D FLIP-FLOP (8001 ONLY) | 80009 | 156-0948-00 |

| Clet No | Tektronix | Serial/Mod | | Norma 9 Description | Mfr | Mfr Dart Number |
|----------------|-----------------|------------|----------|---|-------|-----------------|
| Ckt No. | Part No. | Eff | Dscont | Name & Description | Code | Mfr Part Number |
| U6040 | 156-0323-00 | • | | MICROCIRCUIT, DI: HEX. INVERTER (8001 ONLY) | 01295 | SN74S04N |
| U6040 | 156-0948-00 | | в056028 | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8001 OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U6040 | 156-0323-00 | | | MICROCIRCUIT, DI: HEX. INVERTER (8001 OPTION 45 ONLY) | 01295 | SN74SO4N |
| U6040 | 156-0948-00 | | в056024 | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8001 OPTION 49 ONLY) | 80009 | 156-0948-00 |
| U6040 | 156-0323-00 | в056025 | | MICROCIRCUIT, DI:HEX. INVERTER (8001 OPTION 49 ONLY) | 01295 | SN74S04N |
| U6040 | 156-0948-00 | в032000 | в072741 | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8002A ONLY) | 80009 | 156-0948-00 |
| บ6040 | 156-0323-00 | | | MICROCIRCUIT, DI: HEX. INVERTER (8002A ONLY) | 01295 | SN74S04N |
| U6040 | 156-0948-00 | в010100 | в065055 | MICROCIRCUIT, DI:QUAD D FLIP-FLOP (8002A OPTION 45 ONLY) | 80009 | 156-0948-00 |
| U6040 | 156-0323-00 | в065056 | | MICROCIRCUIT, DI: HEX. INVERTER (8002A OPTION 45 ONLY) | 01295 | SN74S04N |
| บ6040 | 156-0948-00 | | в064022 | MICROCIRCUIT, DI:QUAD D FLIP-FLOP | 80009 | 156-0948-00 |
| U6040 | 156-0323-00 | в064023 | | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI: HEX. INVERTER | 01295 | SN74S04N |
| บ6070 | 156-0996-00 | в010100 | в050299х | (8002A OPTION 49 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 ONLY) | 18324 | 8T26AF |
| บ6070 | 156-0996-00 | | B056028X | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR (8001 OPTION 45 ONLY) | 18324 | 8T26AF |
| U6070 | 156-0996-00 | в015112 | B056024X | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U6070 | 156-0996-00 | B032000 | B072741X | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8002A ONLY) | 18324 | 8T26AF |
| U6070 | 156-0996-00 | | B065055X | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ6070 | 156-0996-00 | в010100 | B064022X | (8002A OPTION 45 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U6080 | 156-0996-00 | в010100 | в050299Х | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR (8001 ONLY) | 18324 | 8T26AF |
| บ6080 | 156-0996-00 | | B056028X | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 OPTION 45 ONLY) | 18324 | 8T26AF |
| U6080 | 156-0996-00 | в015112 | в056024х | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 OPTION 49 ONLY) | 18324 | 8T26AF |
| U6080 | 156-0996-00 | | B072741x | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR (8002A ONLY) | 18324 | ôT26AF |
| U6080 | 156-0996-00 | | в065055Х | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U6080 | 156-0996-00 | в010100 | B064022X | (8002A OPTION 45 ONLY) MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| บ6090 | 156-0996-00 | B010100 | в050299Х | (8002A OPTION 49 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR (8001 ONLY) | 18324 | 8T26AF |
| U60 9 0 | 156-0996-00 | | B056028X | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U6090 | 156-0996-00 | B015112 | B056024X | (8001 OPTION 45 ONLY) MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR (8001 OPTION 49 ONLY) | 18324 | 8T26AF |
| U6090 | 156-0996-00 | в032000 | B072741X | | 18324 | 8T26AF |
| U6090 | 156-0996-00 | | в065055х | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR (8002A OPTION 45 ONLY) | 18324 | 8T26AF |

| Ckt No. | | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-------------|-------------------|------------------|--|-------------|-----------------|
| U6090 | 156-0996-00 | в010100 | B064022X | MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR (8002A OPTION 49 ONLY) | 18324 | 8T26AF |
| U6100 | 156-0996-00 | в010100 | B050299X | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 ONLY) | 18324 | 8T26AF |
| U6100 | 156-0996-00 | В015112 | B056028X | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8001 OPTION 45 ONLY) | 18324 | 8T26AF |
| U6100 | 156-0996-00 | в015112 | B056024X | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR-(8001 OPTION 49 ONLY) | 18324 | 8T26AF |
| U6100 | 156-0996-00 | в032000 | B072741X | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8002A ONLY) | 18324 | 8T26AF |
| . U6100 | 156-0996-00 | в010100 | в065055х | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8002A OPTION 45 ONLY) | 18324 | 8T26AF |
| U6100 | 156-0996-00 | в010100 | B064022X | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR (8002A OPTION 49 ONLY) | 18324 | 8T26AF |
| U6110 | 156-1014-00 | в010100 | в050299х | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 ONLY) | 80009 | 156-1014-00 |
| U6110 | 156-1014-00 | B015112 | B056028X | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 OPTION 45 ONLY) | 80009 | 156-1014-00 |
| U6110 | 156-1014-00 | в015112 | B056024X | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8001 OPTION 49 ONLY) | 80009 | 156-1014-00 |
| U6110 | 156-1014-00 | в032000 | B072741X | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A ONLY) | 80009 | 156-1014-00 |
| U6110 | 156-1014-00 | в010100 | в065055Х | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A OPTION 45 ONLY) | 80009 | 156-1014-00 |
| U6110 | 156-1014-00 | в010100 | B064022X | MICROCIRCUIT, DI:9 BIT ODD/EVEN PTY GEN/CHK (8002A OPTION 49 ONLY) | 80009 | 156-1014-00 |
| U6120 | 156-0464-00 | в010100 | B050299X | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE (8001 ONLY) | 07263 | 74LS20PC OR DC |
| U6120 | 156-0464-00 | B015112 | B056028X | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE (8001 OPTION 45 ONLY) | 07263 | 74LS20PC OR DC |
| U6120 | 156-0464-00 | в015112 | B056024X | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE (8001 OPTION 49 ONLY) | 07263 | 74LS2OPC OR DC |
| U6120 | 156-0464-00 | в032000 | B072741X | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE (8002A ONLY) | 07263 | 74LS20PC OR DC |
| U6120 | 156-0464-00 | в010100 | в065055х | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE (8002A OPTION 45 ONLY) | 07263 | 74LS20PC OR DC |
| U6120 | 156-0464-00 | в010100 | в064022Х | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE (8002A OPTION 49 ONLY) | 07263 | 74LS20PC OR DC |
| U6130 | 156-0530-00 | в010100 | в050299х | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 ONLY) | 80009 | 156-0530-00 |
| U6130 | 156-0530-00 | B015112 | B056028X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8001 OPTION 45 ONLY) | 80009 | 156-0530-00 |
| U6130 | 156-0530-00 | в015112 | B056024X | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U6130 | 156-0530-00 | в032000 | B072741X | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8002A ONLY) | 80009 | 156-0530-00 |
| U6130 | 156-0530-00 | в010100 | в065055х | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 45 ONLY) | 80009 | 156-0530-00 |
| U6130 | 156-0530-00 | B010100 | B064022X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U6140 | 156-0530-00 | в010100 | в050299Х | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 ONLY) | 80009 | 156-0530-00 |
| U6140 | 156-0530-00 | B015112 | B056028X | | 80009 | 156-0530-00 |
| U6140 | 156-0530-00 | в015112 | B056024X | MICROCIRCUIT, DI:QUAD 2-INP MUX,16 PIN DIP (8001 OPTION 49 ONLY) | 80009 | 156-0530-00 |

| Ckt No. | | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|-------------|-------------------|------------------|---|-------------|------------------|
| U6140 | 156-0530-00 | в032000 | B072741X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A ONLY) | 80009 | 156-0530-00 |
| U6140 | 156-0530-00 | в010100 | в065055Х | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 45 ONLY) | 80009 | 156-0530-00 |
| U6140 | 156-0530-00 | в010100 | B064022X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U6150 | 156-0530-00 | в010100 | в050299х | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 ONLY) | 80009 | 156-0530-00 |
| U6150 | 156-0530-00 | B015112 | B056028X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8001 OPTION 45 ONLY) | 80009 | 156-0530-00 |
| U6150 | 156-0530-00 | в015112 | B056024X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8001 OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U6150 | 156-0530-00 | в032000 | B072741X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A ONLY) | 80009 | 156-0530-00 |
| U6150 | 156-0530-00 | в010100 | в065055Х | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 45 ONLY) | 80009 | 156-0530-00 |
| U6150 | 156-0530-00 | в010100 | B064022X | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U6160 | 156-0530-00 | в010100 | в050299х | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 ONLY) | 80009 | 156-0530-00 |
| U6160 | 156-0530-00 | B015112 | B056028X | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8001 OPTION 45 ONLY) | 80009 | 156-0530-00 |
| U6160 | 156-0530-00 | B015112 | в056024х | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U6160 | 156-0530-00 | в032000 | B072741X | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8002A ONLY) | 80009 | 156-0530-00 |
| U6160 | 156-0530-00 | B010100 | в065055Х | | 80009 | 156-0530-00 |
| U6160 | 156-0530-00 | B010100 | в064022Х | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U6170 | 156-0180-00 | в010100 | в050299Х | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 ONLY) | 01295 | SN74S00(N OR J) |
| U6170 | 156-0180-00 | B015112 | B056028X | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 OPTION 45 ONLY) | 01295 | SN74S00(N OR J) |
| U6170 | 156-0180-00 | В015112 | в056024Х | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8001 OPTION 49 ONLY) | 01295 | SN74S00(N OR J) |
| U6170 | 156-0180-00 | в032000 | B072741X | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE (8002A ONLY) | 01295 | SN74S00(N OR J) |
| U6170 | 156-0180-00 | в010100 | в065055Х | | 01295 | SN74S00(N OR J) |
| U6170 | 156-0180-00 | в010100 | в064022X | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE (8002A OPTION 49 ONLY) | 01295 | sn74s00(n or j) |
| U6180 | 156-0480-00 | в010100 | в050299Х | MICROCIRCUIT, DI: QUAD 2-INPUT AND GATE (8001 ONLY) | 01295 | SN74LS08(N OR J) |
| U6180 | 156-0480-00 | B015112 | B056028X | MICROCIRCUIT, DI:QUAD 2-INPUT AND GATE (8001 OPTION 45 ONLY) | 01295 | SN74LS08(N OR J) |
| U6180 | 156-0480-00 | B015112 | B056024X | | 01295 | SN74LS08(N OR J) |
| U6180 | 156-0480-00 | в032000 | B072741X | MICROCIRCUIT, DI: QUAD 2-INPUT AND GATE (8002A ONLY) | 01295 | SN74LS08(N OR J) |
| U6180 | 156-0480-00 | в010100 | в065055х | MICROCIRCUIT, DI:QUAD 2-INPUT AND GATE (8002A OPTION 45 ONLY) | 01295 | SN74LS08(N OR J) |
| U6180 | 156-0480-00 | в010100 | B064022X | | 01295 | SN74LS08(N OR J) |
| U 702 0 | 156-0530-00 | XB025150 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8001 ONLY) | 80009 | 156-0530-00 |

| Ckt No. | | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|----------------------------|-------------------|------------------|---|----------------|-------------------------------|
| U7020 | 156-0530-00 | хв045294 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| บ7020 | 156-0530-00 | хв045293 | | (8001 OPTION 45 ONLY) MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| U7020 | 156-0530-00 | XB020588 | | (8001 OPTION 49 ONLY) MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002 ONLY) | 80009 | 156-0530-00 |
| U7020 | 156-0530-00 | хв052437 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP (8002A ONLY) | 80009 | 156-0530-00 |
| บ7020 | 156-0530-00 | XB052482 | | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 45 ONLY) | 80009 | 156-0530-00 |
| บ7020 | 156-0530-00 | хв052439 | | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP (8002A OPTION 49 ONLY) | 80009 | 156-0530-00 |
| U7140 | 156-0866-00 | в010100 | в025149 | MICROCIRCUIT, DI:13 INP NAND GATES (8001 ONLY) | 04713 | SN74LS133 |
| U7140 | 156-0035-00 | B025150 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8001 ONLY) | 80009 | 156-0035-00 |
| บ7140 | 156-0866-00 | в010100 | в020587 | MICROCIRCUIT, DI:13 INP NAND GATES (8002 ONLY) | 04713 | SN74LS133 |
| U7140 | 156-0035-00 | в020588 | | MICROCIRCUIT, DI:SGL 8-INPUT POS NAND GATE (8002 ONLY) | 80009 | 156-0035-00 |
| U7140 | 156-0035-00 | | | MICROCIRCUIT,DI:SGL 8-INPUT POS NAND GATE (8002A ONLY) | 80009 | 156-0035-00 |
| บ7150 | 156-1059-00 | XB025150 | | (8002A ONLY) MICROCIRCUIT,DI:DUAL J-K EDGE TRIGGERED FF (8001 ONLY) | 80009 | 156-1059-00 |
| U7150 | 156-1059-00 | XB020588 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF | 80009 | 156-1059-00 |
| บ7150 | 156-1059-00 | хв052437 | | (8002 ONLY) MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A ONLY) | 80009 | 156-1059-00 |
| U7160 U7170 | 156-0385-00 156-0645-00 | | | MICROCIRCUIT, DI:HEX.INVERTER MICROCIRCUIT, DI:HEX SCHMITT-TRIG INVERTER | | 156-0385-00 156-0645-00 |
| U7180 U8160 | 156-0386-00 156-1059-00 | XB045290 | | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE MICROCIRCUIT, DI:DUAL J-K EDGE TRIGGERED FF (8001 ONLY) | 04713 80009 | SN74LS10N OR J 156-1059-00 |
| U8160 | 156-1059-00 | хв045294 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8001 OPTION 45 ONLY) | 80009 | 156-1059-00 |
| U8160 | 156-1059-00 | хв045293 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8001 OPTION 49 ONLY) | 80009 | 156-1059-00 |
| U8160 | 156-1059-00 | XB052437 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A ONLY) | 80009 | 156-1059-00 |
| U8160 | 156-1059-00 | XB052482 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A OPTION 45 ONLY) | 80009 | 156-1059-00 |
| U8160 | 156-1059-00 | хв052439 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF (8002A OPTION 49 ONLY) | 80009 | 156-1059-00 |
| VR6031 | 152-0278-00 | хв050300 | | SEMICOND DEVICE: ZENER, 0.4W, 3V, 5% | 04713 | SZG35009K20 |
| VR6031 | 152-0278-00 | хв056029 | | (8001 ONLY) SEMICOND DEVICE:ZENER, 0.4W, 3V, 5% (8001 OPTION 45 ONLY) | 04713 | SZG35009K20 |
| VR6031 | 152-0278-00 | хв056025 | | SEMICOND DEVICE: ZENER, 0.4W, 3V, 5% (8001 OPTION 49 ONLY) | 04713 | SZG35009K20 |
| VR6031 | 152-0278-00 | XB072742 | | SEMICOND DEVICE: ZENER, 0.4W, 3V, 5% (8002A ONLY) | 04713 | SZG35009K20 |
| VR6031 | 152-0278-00 | хв065056 | | SEMICOND DEVICE:ZENER, 0.4W, 3V, 5% (8002A OPTION 45 ONLY) | 04713 | SZG35009K20 |
| VR6031 | 152-0278-00 | ХВО64023 | | SEMICOND DEVICE: ZENER, 0.4W, 3V, 5% (8002A OPTION 49 ONLY) | 04713 | SZG35009K20 |

| Ckt No. | Tektronix Part No. | Serial/Mod Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|-------------------|------------------|---|-------------|-----------------|
| VR7047 | 152-0195-00 | в010100 | B050299X | SEMICOND DEVICE:ZENER, 0.4W, 5.1V, 5% (8001 ONLY) | 04713 | SZ11755 |
| VR7047 | 152-0195-00 | в015112 | B056028X | SEMICOND DEVICE:ZENER,0.4W,5.1V,5% (8001 OPTION 45 ONLY) | 04713 | SZ11755 |
| VR7047 | 152-0195-00 | в015112 | B056024X | SEMICOND DEVICE:ZENER,0.4w,5.1v,5% (8001 OPTION 49 ONLY) | 04713 | SZ11755 |
| VR7047 | 152-0195-00 | в032000 | B072741X | SEMICOND DEVICE:ZENER,0.4W,5.1V,5% (8002A ONLY) | 04713 | SZ11755 |
| VR7047 | 152-0195-00 | в010100 | B065055X | SEMICOND DEVICE:ZENER,0.4W,5.1V,5% (8002A OPTION 45 ONLY) | 04713 | SZ11755 |
| VR7047 | 152-0195-00 | в010100 | B064022X | SEMICOND DEVICE: ZENER, 0.4W, 5.1V, 5% (8002A OPTION 49 ONLY) | 04713 | SZ11755 |

12-102

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|--------------------------------|---------------------------------------|-------------|-----------------|
| A25A2 | | | CKT BOARD ASSY:HIGH SPEED MEMORY | | |
| C2025 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C2031 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2035 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C2041 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C2051 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C2055 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C2061 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C2071 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C2075 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C2081 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C2091 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C2095 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C2101 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | |
| C2132 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C2162 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C3011 | 290-0209-00 | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V | 56289 | |
| C3025 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C3041 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C3045 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3061 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3065 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3081 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3085 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3101 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3105 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3125 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3144 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C3189 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C4031 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C4035 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C4051 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C4055 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C4071 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C4075 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C4091 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C4095 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C4185 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C5011 | 290-0209-00 | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V | | 30D688 |
| C5021 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C5025 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C5029 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C5041 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C5045 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | | MX0104Z1205R5 |
| C5049 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C5061 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | |
| C5065 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C5069 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C5081 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| C5085 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C5089 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C5101 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C5105 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C5109 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C5131 | 283-0023-00 |) | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C6066 | 283-0023-00 |) | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |

| | Tallagadio | Carried (Mardal Na | | NA6~ | |
|----------------|----------------------------|--------------------------------|---|----------------|----------------------------|
| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
| | | | Name & Description | | |
| C6116 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C6161 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | |
| C7011 | 290-0209-00 | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V | 56289 | 30D688 |
| C7042 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C7121 | 290-0209-00 | | CAP., FXD, ELCTLT: 50UF, +75-10%, 25V | 56289 | 30D688 |
| C7174 | 283-0023-00 | | CAP., FXD, CER DI:0.1UF, +80-20%, 12V | 91418 | MX0104Z1205R5 |
| C8148 | 283-0023-00 | ı | CAP.,FXD,CER DI:0.1UF,+80-20%,12V | 91418 | MX0104Z1205R5 |
| DL2140 | 119-0982-00 | 1 | DELAY LINE, ELEC: 200NS, 100 OHM | 97722 | EP19828 |
| R2118 | 315-0510-00 | 1 | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R2121 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | |
| R2141 | 315-0101-00 | | RES., FXD, CMPSN:100 OHM, 5%, 0.25W | 01121 | CB1015 |
| R2145 | 315-0101-00 | | RES., FXD, CMPSN:100 OHM, 5%, 0.25W | 01121 | |
| R3112 | 315-0470-00 | | RES., FXD, CMPSN:47 OHM, 5%, 0.25W | 01121 | CB4705 |
| R3114 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | | CB5105 |
| | | | | | |
| R4112 | 315-0470-00 |) | RES.,FXD,CMPSN:47 OHM,5%,0.25W | | CB4705 |
| R4114 | 315-0510-00 | | RES., FXD, CMPSN:51 OHM, 5%, 0.25W | 01121 | CB5105 |
| R4141 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | |
| R4147 | 307-0595-00 | | RES NTWK, FXD FI:7,5.6K OHM, 2%, 1.0W | 32997 | |
| R5111 | 315-0220-00 | | RES., FXD, CMPSN:22 OHM, 5%, 0.25W | | CB2205 |
| R5112 | 315-0510-00 | | RES.,FXD,CMPSN:51 OHM,5%,0.25W | 01121 | CB5105 |
| R5113 | 315-0220-00 | 1 | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W | 01121 | CB2205 |
| R5114 | 315-0220-00 | | RES., FXD, CMPSN:22 OHM, 5%, 0.25W | | CB2205 |
| R5115 | 315-0220-00 | | RES., FXD, CMPSN: 22 OHM, 5%, 0.25W | | CB2205 |
| R5116 | 315-0220-00 | | RES., FXD, CMPSN:22 OHM, 5%, 0.25W | 01121 | CB2205 |
| R5117 | 315-0220-00 | | RES., FXD, CMPSN:22 OHM, 5%, 0.25W | | CB2205 |
| R5118 | 315-0220-00 | | RES.,FXD,CMPSN:22 OHM,5%,0.25W | | CB2205 |
| R6067 | 215 0222 00 | 1 | DEC. EVD CAMEN. 2 24 OUN 5% O 250 | 01121 | CB2225 |
| R7048 | 315-0222-00 315-0471-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W RES.,FXD,CMPSN:470 OHM,5%,0.25W | | CB2223 CB4715 |
| R7147 | 307-0596-00 | | RES NTWK, FXD FI:7,2.2K OHM,2%,1.0W | 91637 | |
| | | | | | |
| S4140 | 260-1589-00 | 1 | SWITCH, PUSH: (6)SPST, 0.1A,5V | 00779 | 435166-4 |
| U1110 | 156-0381-00 | 1 | MICROCIRCUIT, DI: QUAD 2-INPUT EXCL OR GATES | 80009 | 156-0381-00 |
| U2020 | 156-1112-00 | 1 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2030 | 156-1112-00 | 1 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2040 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2050 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2060 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2070 | 156-1112-00 | 1 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2080 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2090 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2100 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U2120 | 156-0321-00 | | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE | 80009 | 156-0321-00 |
| U2130 | 156-0180-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74S00(N OR J) |
| 112150 | 156-0000-00 | 1 | MICDOCKA INABC.HIGH CDEBU REA 3-CAVAD ING | 0/1712 | MC6888 /MC8mper |
| U2150 U2160 | 156-0999-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV MICROCIRCUIT, DI: DUAL 4-INPUT, NAND GATE | 04713 18324 | MC6888/MC8T98L N74S20A |
| U2170 | 156-0304-00 156-0180-00 | | MICROCIRCUIT, DI: DUAL 4-INPUT, NAND GATE | 01295 | SN74S00(N OR J) |
| U2170 | 156-0617-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE MICROCIRCUIT, DI:DUAL 4 BIT BIN COUNTER | 01295 | SN74393N |
| U3020 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U3030 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| | | | • | | |
| U3040 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U3050 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U3060 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U3070 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U3080 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 156-1112-00 |
| U3090 | 156-1112-00 | 1 | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| | | | | | |

| | Taletranie | Carial/Madal Na | | Mfr | |
|----------------|----------------------------|--------------------------------|---|----------------|--------------------|
| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Code | Mfr Part Number |
| CKL NO. | rait NU. | EII DSCUIIL | Name & Description | Code | Will Fait Nullipei |
| U3100 | 156-1112-00 | ı | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U3120 | 156-0321-00 | l . | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE | 80009 | 156-0321-00 |
| U3130 | 156-0693-00 | ı | MICROCIRCUIT, DI: DECODER/DEMULTIPLEXER | 01295 | |
| U3140 | 156-0385-00 | 1 | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | |
| U3150 | 156-0383-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NOR GATE | 80009 | |
| U3160 | 156-0118-00 | | MICROCIRCUIT, DI: J-K MASTER-SLAVE FLIP-FLOP | 80009 | 156-0118-00 |
| บ3170 | 156-0118-00 | • | MICROCIRCUIT,DI:J-K MASTER-SLAVE FLIP-FLOP | 80009 | 156-0118-00 |
| U3180 | 156-1059-00 | | MICROCIRCUIT,DI:DUAL J-K EDGE TRIGGERED FF | 80009 | 156-1059-00 |
| U4020 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U4030 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U4040 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | |
| U4050 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| | | | | | |
| U4060 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U4070 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | |
| U4080 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | |
| U4090 | 156-1112-00 | | MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM MICROCIRCUIT, DI:4096 X 1 DYNAMIC RAM | 80009 80009 | |
| U4100 U4120 | 156-1112-00 | | MICROCIRCUIT, DI: 4090 X 1 DINAMIC RAM MICROCIRCUIT, DI: ADRS MUX & REFRESH CNTR | 04713 | |
| 04120 | 156-0965-00 | | MICROCIRCUIT, DI. ADAS MOX & REFRESH CHIK | 04713 | MCJ242AL |
| U4150 | 156-1041-00 |) | MICROCIRCUIT, DI: 4 BIT MAGNITUDE COMPARATOR | 80009 | 156-1041-00 |
| U4160 | 156-0530-00 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| U4170 | 156-0985-00 |) | MICROCIRCUIT, DI: DUAL 5-INPUT NOR GATE | 18324 | |
| U4180 | 156-0804-00 |) | MICROCIRCUIT, DI: QUADRUPLE S-R LATCH | 07263 | 74LS279PC |
| U5020 | 156-1112-00 |) | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| บ5030 | 156-1112-00 |) | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| บ5040 | 156-1112-00 |) | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U5050 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | |
| บ5060 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| บ5070 | 156-1112-00 |) | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| บ5080 | 156-1112-00 | | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| บ5090 | 156-1112-00 |) | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| บ5100 | 156-1112-00 |) | MICROCIRCUIT, DI: 4096 X 1 DYNAMIC RAM | 80009 | 156-1112-00 |
| U5140 | 156-0153-00 | | MICROCIRCUIT, DI: HEX INVERTER, BUFFER | 01295 | |
| U5150 | 156-0530-00 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| U5160 | 156-1059-00 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF | 80009 | 156-1059-00 |
| U5170 | 156-0383-00 |) | MICROCIRCUIT, DI: QUAD 2-INPUT NOR GATE | 80009 | 156-0383-00 |
| U5180 | 156-0480-00 |) | MICROCIRCUIT, DI: QUAD 2-INPUT AND GATE | 01295 | SN74LSO8(N OR J) |
| U6020 | 156-1014-00 |) | MICROCIRCUIT,DI:9 BIT ODD/EVEN PTY GEN/CHK | 80009 | 156-1014-00 |
| U6030 | 156-0948-00 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP | 80009 | |
| บ6040 | 156-0948-00 | | MICROCIRCUIT, DI: QUAD D FLIP-FLOP | 80009 | |
| U6070 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | | 8T26AF |
| U6080 | 156-0996-00 |) | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U6090 | 156-0996-00 | | MICROCIRCUIT, DI:3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| 116100 | 156 0006 06 | . | MICDOCIDCHIT DI. 2-CTATE OHAD DHC VOUD | 18324 | 8T26AF |
| U6100 | 156-0996-00 | | MICROCIRCUIT,DI:3-STATE QUAD BUS XCVR MICROCIRCUIT,DI:9 BIT ODD/EVEN PTY GEN/CHK | 80009 | |
| U6110 U6120 | 156-1014-00 156-0464-00 | | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 07263 | |
| U6130 | 156-0530-00 | | MICROCIRCUIT, DI: OUAD 2-INP MUX, 16 PIN DIP | 80009 | |
| U6140 | 156-0530-00 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | |
| U6150 | 156-0530-00 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| | | | , , | | |
| U6160 | 156-0530-00 | | MICROCIRCUIT, DI:QUAD 2-INP MUX, 16 PIN DIP | 80009 | · · |
| U6170 | 156-0180-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT NAND GATE | 01295 01295 | |
| U6180 | 156-0480-00 | | MICROCIRCUIT, DI:QUAD 2-INPUT AND GATE MICROCIRCUIT, DI:512 X 8 PROM, PROGRAMMED | 80009 | 160-0118-00 |
| ช7050 ช7140 | 160-0118-00 156-0035-00 | | MICROCIRCUIT, DI: SIZ X 8 PROM, PROGRAMMED MICROCIRCUIT, DI: SGL 8-INPUT POS NAND GATE | 80009 | 156-0035-00 |
| บ7150 | 156-0530-00 | | MICROCIRCUIT, DI: QUAD 2-INP MUX, 16 PIN DIP | 80009 | 156-0530-00 |
| | | | | | |
| U7160 | 156-0385-00 | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| U7170 | 156-0645-00 | | MICROCIRCUIT, DI: HEX SCHMITT-TRIG INVERTER | 80009 | 156-0645-00 |
| U7180 | 156-0386-00 | J | MICROCIRCUIT, DI:TRIPLE 3-INPUT NAND GATE | 04713 | SN74LS10N OR J |

| Ckt No. | Tektronix Part No. | Serial/ Eff | Model No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|---------|-----------------------|----------------|---------------------|--|-------------|-----------------|
| U8160 | 156-1059-0 | 0 | | MICROCIRCUIT, DI: DUAL J-K EDGE TRIGGERED FF | 80009 | 156-1059-00 |
| VR7047 | 152-0195-0 | 0 | | SEMICOND DEVICE: ZENER, 0.4W, 5.1V, 5% | 04713 | SZ11755 |

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|----------------------------|--------------------------------|--|----------------|------------------------------------|
| A30 | | - | CKT BOARD ASSY:SYSTEM COMMUNICATION | | |
| C1013 | 290-0209-00 |) | CAP., FXD, ELCTLT:50UF, +75-10%, 25V | 56289 | 30D688 |
| C1028 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C1045 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1069 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1072 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1085 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C1106 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2035 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z 855-558Z5U-103Z |
| C2055 | 283-0003-00 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD,CER DI:0.01UF,+80-20%,150V | | 855-558Z5U-103Z |
| C2069 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C2085 C3011 | 283-0003-00 283-0003-00 | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V | | 855-558Z5U-103Z |
| C3051 | 283-0003-00 |) | CAP.,FXD,CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| C3081 | 283-0649-00 | | CAP., FXD, MICA D:105PF, 1%, 300V | 00853 | D153F1050F0 |
| C3085 | 283-0648-00 | | CAP., FXD, MICA D:10PF, 5%, 100V | 00853 | D151C100D0 |
| C3095 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C4017 | 290-0209-00 | | CAP., FXD, ELCTLT:50UF, +75-10%, 25V | 56289 | 30D688 |
| C4021 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C4028 | 290-0209-00 |) | CAP.,FXD,ELCTLT:50UF,+75-10%,25V | 56289 | 30D688 |
| C4045 | 283-0003-00 |) | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C4065 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | |
| C4103 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | | 855-558Z5U-103Z |
| C4131 | 283-0003-00 |) | CAP.,FXD,CER DI:0.01UF,+80-20%,150V | 72982 | 855-558Z5U-103Z |
| R1031 | 315-0302-00 | | RES., FXD, CMPSN:3K OHM, 5%, 0.25W | 01121 01121 | |
| R1036 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | |
| R1053 | 315-0302-00 | | RES., FXD, CMPSN: 3K OHM, 5%, 0.25W | 01121 | |
| R1054 | 315-0302-00 | | RES.,FXD,CMPSN:3K OHM,5%,0.25W RES.,FXD,CMPSN:3K OHM,5%,0.25W | 01121 | |
| R1083 R1084 | 315-0302-00 315-0302-00 | | RES., FXD, CMPSN: 3K OHM, 5%, 0.25W | 01121 | |
| R1099 | 315-0222-00 |) | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R3016 | 315-0102-00 | | RES., FXD, CMPSN:1K OHM, 5%, 0.25W | 01121 | CB1025 |
| R3074 | 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 | CB2225 |
| R3086 | 321-0306-00 | | RES.,FXD,FILM:15K OHM,1%,0.125W | 91637 | MFF1816G15001F |
| R3089 | 321-0816-00 | | RES., FXD, FILM: 5K OHM, 1%, 0.125W | 24546 | NA55D5001F |
| R3094 | 315-0302-00 |) | RES.,FXD,CMPSN:3K OHM,5%,0.25W | 01121 | CB3025 |
| R3096 | 315-0302-00 | | RES., FXD, CMPSN: 3K OHM, 5%, 0.25W | | CB3025 |
| R4085 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | | CB2225 |
| R4099 | 315-0302-00 | | RES., FXD, CMPSN: 3K OHM, 5%, 0.25W | | CB3025 |
| R4105 | 315-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W | 01121 | CB2225 |
| R5044 R5045 | 315-0222-00 315-0222-00 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W RES.,FXD,CMPSN:2.2K OHM,5%,0.25W | 01121 01121 | CB2225 CB2225 |
| R5041 | 307-0596-00 | | RES NTWK, FXD F1:7,2.2K OHM, 2%, 1.0W | 91637 | MSP08A01222G |
| R5051 | 307-0596-00 | | RES NTWK, FXD F1:7,2.2K OHM, 2%, 1.0W | 91637 | |
| U1020 | 156-0997-00 |) | MICROCKT, INTFC: DUAL COMM LINE DRIVER | 18324 | N8T15A |
| U1030 | 156-0995-00 | | MICROCKT, INTFC: DUAL COMM LINE RCVR W/HYST | 80009 | 156-0995-00 |
| U1040 | 156-0995-00 |) | MICROCKT, INTFC: DUAL COMM LINE RCVR W/HYST | 80009 | 156-0995-00 |
| U1050 | 156-0995-00 |) | MICROCKT, INTFC: DUAL COMM LINE RCVR W/HYST | 80009 | 156-0995-00 |
| U1060 | 156-0997-00 | | MICROCKT, INTFC: DUAL COMM LINE DRIVER | 18324 | N8T15A |
| U1070 | 156-0995-00 |) | MICROCKT, INTFC: DUAL COMM LINE RCVR W/HYST | 80009 | 156-0995-00 |
| U1080 | 156-0997-00 | | MICROCKT, INTFC: DUAL COMM LINE DRIVER | 18324 | N8T15A |
| U1090 | 156-0995-00 | | MICROCKT, INTFC: DUAL COMM LINE RCVR W/HYST | 80009 | 156-0995-00 |
| U1110 | 156-0385-00 | | MICROCIRCUIT, DI:HEX.INVERTER | 80009 80009 | 156-0385-00 |
| บ2010 บ2020 | 156-0984-00 | | MICROCIRCUIT, DI: 256 X 1 RAM | 80009 | 156-0984-00 156-0984-00 |
| U2020 | 156-0984-00 156-0061-00 | | MICROCIRCUIT,DI:256 X 1 RAM MICROCIRCUIT,DI:SGL,BCD TO DEC DECODER | 01295 | SN7442(N OR J) |
| 02030 | 150 0001-00 | • | MICAGOLIGOTI, DI. 1001, DOD 10 DEG DEGODER | 01277 | |

| | Tektronix | Serial/Model No. | | Mfr | |
|---------|-------------|------------------|--|-------|------------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| U2040 | 156-0464-00 |) | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 07263 | 74LS20PC OR DC |
| U2050 | 156-0385-00 |) | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | 156-0385-00 |
| U2060 | 156-0383-00 |) | MICROCIRCUIT, DI: QUAD 2-INPUT NOR GATE | 80009 | 156-0383-00 |
| U2070 | 156-0985-00 |) | MICROCIRCUIT, DI: DUAL 5-INPUT NOR GATE | 18324 | N74LS260AN OR J |
| U2080 | 156-0382-00 |) | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN74LSOO(N OR J) |
| U2100 | 156-0658-00 |) | MICROCIRCUIT, DI: ASYNCHRONOUS COMM INT ADPT | 07263 | F6850PC OR DC |
| U2120 | 156-0658-00 |) | MICROCIRCUIT, DI: ASYNCHRONOUS COMM INT ADPT | 07263 | F6850PC OR DC |
| U2130 | 156-0658-00 |) | MICROCIRCUIT, DI: ASYNCHRONOUS COMM INT ADPT | 07263 | F6850PC OR DC |
| U3010 | 156-1015-00 |) | MICROCIRCUIT, DI: DUAL J-K EDGETRIG FF | 80009 | 156-1015-00 |
| U3020 | 156-0998-00 |) | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| บ3030 | 156-0998-00 |) | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| บ3040 | 156-0465-00 |) | MICROCIRCUIT, DI:8-INPUT NAND GATE | 27014 | DM74LS30NOR J |
| U3050 | 156-0999-00 |) | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U3060 | 156-0464-00 | | MICROCIRCUIT, DI: DUAL 4-INPUT NAND GATE | 07263 | |
| U3070 | 156-0382-00 | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | |
| U3080 | 156-0405-00 | | MICROCIRCUIT, DI: DUAL RETRIG MONOSTABLE MV | 07263 | |
| U3130 | 156-0089-00 | | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U4010 | 156-0089-00 |) | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | 156-0089-00 |
| U4020 | 156-0089-00 |) | MICROCIRCUIT, DI: 4-BIT UP/DOWN COUNTER | 80009 | |
| บ4030 | 156-0998-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U4040 | 156-0999-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U4050 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4060 | 156-0996-00 | | MICROCIRCUIT, DI: 3-STATE QUAD BUS XCVR | 18324 | 8T26AF |
| U4070 | 156-0998-00 |) | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| บ4080 | 156-0999-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | 04713 | MC6888/MC8T98L |
| U4090 | 156-0998-00 | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE BFR | 80009 | 156-0998-00 |
| U4110 | 156-0844-00 | | MICROCIRCUIT, DI: SYNC 4-BIT BIN COUNTER | 34335 | SN74LS161N |
| U4120 | 156-0844-00 | | MICROCIRCUIT, DI: SYNC 4-BIT BIN COUNTER | 34335 | SN74LS161N |
| U4130 | 156-0844-00 |) | MICROCIRCUIT, DI: SYNC 4-BIT BIN COUNTER | 34335 | SN74LS161N |

12-108

| Ckt No. | | Serial/Mode Eff | el No. Dscont | Name & Description | Mfr Code | Mfr Part Number |
|----------------|----------------------------|--------------------|------------------|---|-------------|------------------------------------|
| A40 | | | | CKT BOARD ASSY:LOWER FRONT PANEL | | |
| C2017 | 290-0209-00 | в010100 | в050373 | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8001 ONLY) | 56289 | 30D688 |
| C2017 | 290-0287-00 | в050374 | | CAP.,FXD,ELCTLT:47UF,20%,25V (8001 ONLY) | 56289 | 150D475X0035B2 |
| C2017 | 290-0209-00 | в032000 | B073306 | CAP.,FXD,ELCTLT:50UF,+75-10%,25V (8002A ONLY) | 56289 | 30D688 |
| C2017 | 290-0287-00 | в073307 | | CAP.,FXD,ELCTLT:47UF,20%,25V (8002A ONLY) | 56289 | 150D475X0035B2 |
| C2096 C2139 | 283-0003-00 283-0003-00 | | | CAP.,FXD,CER DI:0.01UF,+80-20%,150V CAP.,FXD,CER DI:0.01UF,+80-20%,150V | | 855-558Z5U-103Z 855-558Z5U-103Z |
| DS1017 | 150-1001-00 | | | LT EMITTING DIO:RED,660NM,100MA MAX | 50522 | MV5024 |
| DS1018 | 150-1001-00 | | | LT EMITTING DIO: RED, 660NM, 100MA MAX | 50522 | MV5024 |
| DS1086 | 150-1001-00 | | | LT EMITTING DIO: RED, 660NM, 100MA MAX | 50522 | MV5024 |
| DS1087 | 150-1001-00 | | | LT EMITTING DIO: RED, 660NM, 100MA MAX | 50522 | MV5024 |
| DS1096 | 150-1001-00 | | | LT EMITTING DIO:RED,660NM,100MA MAX | | MV5024 |
| DS1097 | 150-1001-00 | | | LT EMITTING DIO: RED, 660NM, 100MA MAX | 50522 | MV5024 |
| DS1126 | 150-1001-00 | | | LT EMITTING DIO: RED, 660NM, 100MA MAX | 50522 | MV5024 |
| DS1127 | 150-1001-00 | | | LT EMITTING DIO: RED, 660NM, 100MA MAX | 50522 | MV5024 |
| DS1146 | 150-1001-00 | | | LT EMITTING DIO: RED, 660NM, 100MA MAX | 50522 | MV5024 |
| DS1147 | 150-1001-00 | | | LT EMITTING DIO:RED,660NM,100MA MAX | 50522 | MV5024 |
| R1023 | 315-0221-00 | | | RES.,FXD,CMPSN:220 OHM,5%,0.25W | 01121 | CB2215 |
| R1093 | 315-0221-00 | | | RES., FXD, CMPSN: 220 OHM, 5%, 0.25W | 01121 | CB2215 |
| R1123 | 315-0221-00 | | | RES., FXD, CMPSN: 220 OHM, 5%, 0.25W | 01121 | CB2215 |
| R1130 | 315-0222-00 | хв050374 | | RES.,FXD,CMPSN:2.2K OHM,5%,0.25W (8001 ONLY) | 01121 | CB2225 |
| R1130 | 315-0222-00 | хв073307 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.25W (8002A ONLY) | 01121 | CB2225 |
| R2039 | 307-0596-00 | | | RES NTWK, FXD F1:7,2.2K OHM, 2%, 1.0W | 91637 | MSP08A01222G |
| R2079 | 307-0596-00 | | | RES NTWK, FXD F1:7,2.2K OHM, 2%, 1.0W | 91637 | |
| R2099 | 307-0596-00 | | | RES NTWK, FXD FI:7,2.2K OHM, 2%, 1.0W | 91637 | MSP08A01222G |
| R2149 | 307-0596-00 | | | RES NTWK, FXD FI:7,2.2K OHM, 2%, 1.0W | 91637 | MSP08A01222G |
| S3012 | 260-1915-00 | | | SWITCH, TOGGLE: SPDT, 0.4VA | | 7101-J2-V3-B8 |
| S3081 | 260-1912-00 | | | SWITCH, TOGGLE: SPDT, 0.4VA | 09353 | |
| \$3141 | 260-1912-00 | | | SWITCH, TOGGLE: SPDT, 0.4VA | 09353 | 7109-J2-V3-B8 |
| U2070 | 156-0030-00 | | | MICROCIRCUIT, DI: QUAD 2-INPUT NAND GATE | 01295 | SN7400(N OR J) |
| U2080 | 156-0058-00 | | | MICROCIRCUIT, DI: HEX. INVERTER | 80009 | |
| U2120 | 156-0999-00 | | | MICROCKT, INTFC: HIGH SPEED HEX 3-STATE INV | | MC6888/MC8T98L |
| U2150 | 156-1015-00 | | | MICROCIRCUIT, DI: DUAL J-K EDGETRIG FF | 80009 | 156-1015-00 |

| | Tektronix | Serial/Model No. | | Mfr | |
|----------|----------------------------|------------------|---|-------|----------------------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| A45 | 118-0512-00 |) | CKT BOARD ASSY: HCC15-3 | 80009 | 118-0512-00 |
| C1 C2 | 290-0844-00 290-0871-00 | | CAP.,FXD,ELCTLT:100UF,-10+75%,35 WVDC CAP.,FXD,ELCTLT:6800UF,+50-10%,35VDC | 54473 | ECE-A35V100L |
| C3 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| C4 | 290-0844-00 | | CAP., FXD, ELCTLT: 100UF, -10+75%, 35 WVDC | 54473 | |
| C5 | 290-0871-00 | | CAP., FXD, ELCTLT: 6800UF, +50-10%, 35 VDC | | |
| C6 | 283-0003-00 | | CAP., FXD, CER DI:0.01UF, +80-20%, 150V | 72982 | 855-558Z5U-103Z |
| С7 | 290-0844-00 | 1 | CAP.,FXD,ELCTLT:100UF,-10+75%,35 WVDC | 54473 | ECE-A35V100L |
| CR1 | 152-0066-00 | 1 | SEMICOND DEVICE: SILICON, 400V, 750MA | 14433 | LG4016 |
| CR2 | 152-0198-00 | | SEMICOND DEVICE: SILICON, 200V, 3A | 03508 | 1N5624 |
| CR3 | 152-0198-00 | ı | SEMICOND DEVICE: SILICON, 200V, 3A | 03508 | 1N5624 |
| CR4 | 152-0198-00 | l | SEMICOND DEVICE: SILICON, 200V, 3A | 03508 | 1 N 5 6 2 4 |
| CR5 | 152-0198-00 | 1 | SEMICOND DEVICE: SILICON, 200V, 3A | 03508 | 1N5624 |
| CR7 | 152-0066-00 | 1 | SEMICOND DEVICE: SILICON, 400V, 750MA | 14433 | LG4016 |
| CR8 | 152-0198-00 | 1 | SEMICOND DEVICE: SILICON, 200V, 3A | 03508 | 1N5624 |
| CR9 | 152-0198-00 | | SEMICOND DEVICE: SILICON, 200V, 3A | | 1N5624 |
| CR11 | 152-0066-00 | | SEMICOND DEVICE: SILICON, 400V, 750MA | | LG4016 |
| CR13 | 152-0066-00 | | SEMICOND DEVICE: SILICON, 400V, 750MA | 14433 | LG4016 |
| 01 | 151 0/20 00 | | MDANGTOMOD, GTI TOON NDN | 90000 | 151 0/20-00 |
| Q1 Q2 | 151-0439-00 | | TRANSISTOR: SILICON, NPN | 80009 | 151-0439-00 151-0433-00 |
| Q2 Q3 | 151-0433-00 151-0301-00 | | TRANSISTOR: SILICON, NPN TRANSISTOR: SILICON, PNP | 27014 | |
| Q3 Q4 | 151-0454-00 | | TRANSISTOR: SILICON, PNP TRANSISTOR: SILICON, NPN | | 151-0454-00 |
| · | 131-0434-00 | • | TRANSISTOR. SILICON, NEW | 00009 | 131-0434-00 |
| Rl | 301-0331-00 | 1 | RES., FXD, CMPSN: 330 OHM, 5%, 0.50W | 01121 | EB3315 |
| R2 | 301-0331-00 | | RES.,FXD,CMPSN:330 OHM,5%,0.50W | | EB3315 |
| R4 | 308-0701-00 | | RES.,FXD,WW:0.12 OHM,5%,2W | | BWH-R1200J |
| R5 | 301-0271-00 | 1 | RES., FXD, CMPSN: 270 OHM, 5%, 0.50W | | EB2715 |
| R6 | 301-0362-00 | 1 | RES., FXD, CMPSN: 3.6K OHM, 5%, 0.50W | | EB3625 |
| R7 | 301-0362-00 | | RES., FXD, CMPSN: 3.6K OHM, 5%, 0.50W | 01121 | EB3625 |
| R8 | 307-0051-00 | | RES., FXD, CMPSN: 2.7 OHM, 5%, 0.50W | | EB27G5 |
| R9 | 118-0485-00 | | RES., VAR, WW:1.5K OHM, 20%, 1.5W | 11236 | |
| R10 | 323-0181-00 | | RES., FXD, FILM: 750 OHM, 1%, 0.50W | 75042 | CECT0-7500F |
| R11 | 323-1217-01 | | RES., VAR, WW: 1.80K OHM, 0.5%, 0.5W | | |
| R13 | 301-0331-00 | | RES., FXD, CMPSN: 330 OHM, 5%, 0.50W | | EB3315 |
| R14 | 301-0472-00 | 1 | RES., FXD, CMPSN:4.7K OHM, 5%, 0.50W | 01121 | EB4725 |
| R15 | 301-0331-00 | 1 | RES., FXD, CMPSN: 330 OHM, 5%, 0.50W | 01121 | EB3315 |
| R16 | 301-0331-00 | l | RES., FXD, CMPSN: 330 OHM, 5%, 0.50W | | EB3315 |
| R17 | 301-0472-00 | | RES., FXD, CMPSN: 4.7K OHM, 5%, 0.50W | | EB4725 |
| R18 | 301-0241-00 | | RES.,FXD,CMPSN:240 OHM,5%,0.50W | | EB2415 |
| R19 | 307-0051-00 | | RES., FXD, CMPSN: 2.7 OHM, 5%, 0.50W | | EB27G5 |
| R20 | 301-0331-00 | l | RES.,FXD,CMPSN:330 OHM,5%,0.50W | 01121 | EB3315 |
| R21 | 307-0051-00 | 1 | RES., FXD, CMPSN: 2.7 OHM, 5%, 0.50W | 01121 | EB27G5 |
| R22 | 118-0485-00 | 1 | RES., VAR, WW:1.5K OHM, 20%, 1.5W | 11236 | TYPE 110 |
| R23 | 323-0181-00 | 1 | RES.,FXD,FILM:750 OHM,1%,0.50W | 75042 | CECTO-7500F |
| R24 | 323-1217-01 | | RES., VAR, FILM: 1.80K OHM, 0.5%, 0.5W | | |
| R26 | 308-0701-00 | 1 | RES., FXD, WW:0.12 OHM, 5%, 2W | 75042 | BWH-R1200J |
| R27 | 301-0102-00 | 1 | RES., FXD, CMPSN: 1K OHM, 5%, 0.50W | 01121 | EB1025 |
| R28 | 301-0102-00 | 1 | RES., FXD, CMPSN:1K OHM, 5%, 0.50W | 01121 | EB1025 |
| R29 | 301-0331-00 | | RES., FXD, CMPSN: 330 OHM, 5%, 0.50W | | EB3315 |
| R30 | 301-0102-00 | | RES., FXD, CMPSN:1K OHM, 5%, 0.50W | | EB1025 |
| R31 | 301-0102-00 | | RES., FXD, CMPSN:1K OHM, 5%, 0.50W | | EB1025 |
| Tl | 118-0449-00 | | XFMR, PWR, SDN: | | |
| | | | | 0/=== | |
| U1 | 156-0071-00 | | MICROCIRCUIT, LI: VOLTAGE REGULATOR | 04713 | |
| U2 | 156-0071-00 | | MICROCIRCUIT, LI: VOLTAGE REGULATOR | 04713 | MC1723CL |

12-110 @ JUN 1981

| Ckt No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Name & Description | Mfr Code | Mfr Part Number |
|------------|----------------------------|--------------------------------|---|-------------|----------------------------|
| | | | | | |
| A50 | | • | CKT BOARD ASSY: F5-25 | | |
| C1 | 290-0838-00 |) | CAP., FXD, ELCTLT: 2200UF, +50-10%, 35V | 54473 | ECE-B1VV222S |
| C2 | 290-0870-00 |) | CAP., FXD, ELCTLT: 5400UF, +100-10%, 15VDC | | |
| C3 | 290-0870-00 | | CAP., FXD, ELCTLT: 5400UF, +100-10%, 15VDC | | |
| C4 | 283-0065-00 | | CAP., FXD, CER DI:0.001UF, 5%, 100V | 72982 | 805-518-Z5D0102J |
| C5 | 290-0869-00 | | CAP., FXD, ELCTLT: 1000UF, +50-10%, 16VDC | | |
| C6 | 290-0869-00 | | CAP., FXD, ELCTLT: 1000UF, +50-10%, 16VDC | | |
| C7 | 290-0804-00 |) | CAP.,FXD,ELCTLT:10UF,+50-10%,25V | 55680 | 25ULA10V-T |
| CR1 | 152-0066-00 |) | SEMICOND DEVICE:SILICON,400V,750MA | 14433 | LG4016 |
| CR2 | 152-0066-00 |) | SEMICOND DEVICE: SILICON, 400V, 750MA | 14433 | LG4016 |
| CR3 | 152-0729-00 |) | SEMICOND DEVICE: RECT, SI, DUAL, COMMON ANODE | 83003 | R711A |
| CR4 | 152-0729-00 |) | SEMICOND DEVICE: RECT, SI, DUAL, COMMON ANODE | 83003 | R711A |
| 01 | 151-0656-00 | 1 | TRANSTEROR.CITICON NON | 90000 | 151-0454-00 |
| Q1 Q2 | 151-0454-00 151-0433-00 | | TRANSISTOR: SILICON, NPN TRANSISTOR: SILICON, NPN | 80009 | 151-0454-00 151-0433-00 |
| Q2 Q3 | 151-0433-00 | | TRANSISTOR: SILICON, NPN | 80009 | |
| Q4 | 151-0433-00 | | TRANSISTOR: SILICON, NPN | 80009 | |
| Q5 | 151-0433-00 | | TRANSISTOR: SILICON, NPN | 80009 | 151-0433-00 |
| \ - | | | ,, | | |
| R1 | 307-0055-00 |) | RES., FXD, CMPSN: 3.9 OHM, 5%, 0.50W | | EB39G5 |
| R2 | 301-0220-00 |) | RES., FXD, CMPSN: 22 OHM, 5%, 0.50W | | EB2205 |
| R3 | 307-0055-00 | | RES., FXD, CMPSN: 3.9 OHM, 5%, 0.50W | | EB39G5 |
| R4 | 301-0220-00 | | RES., FXD, CMPSN: 22 OHM, 5%, 0.50W | | EB2205 |
| R5 | 307-0060-00 | | RES., FXD, CMPSN: 6.8 OHM, 5%, 0.50W | | EB68G5 |
| R6 | 301-0220-00 | | RES., FXD, CMPSN: 22 OHM, 5%, 0.50W | 01121 | EB2205 |
| R7 | 307-0060-00 |) | RES., FXD, CMPSN: 6.8 OHM, 5%, 0.50W | 01121 | EB68G5 |
| R8 | 301-0220-00 |) | RES.,FXD,CMPSN:22 OHM,5%,0.50W | 01121 | EB2205 |
| R9 | 118-0485-00 |) | RES., FXD, WW:1.5K OHM, 20%, 1.5W | 11236 | TYPE 110 |
| R10 | 301-0222-00 |) | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.50W | | EB2225 |
| R11 | 301-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.50W | | EB2225 |
| R12 | 301-0332-00 |) | RES., FXD, CMPSN: 3.3K OHM, 5%, 0.50W | 01121 | EB3325 |
| R13 | 118-0485-00 |) | RES., FXD, WW:1.5K OHM, 20%, 1.5W | 11236 | TYPE 110 |
| R14 | 301-0222-00 | | RES., FXD, CMPSN: 2.2K OHM, 5%, 0.50W | 01121 | EB2225 |
| R15 | 307-0060-00 |) | RES., FXD, CMPSN: 6.8 OHM, 5%, 0.50W | 01121 | EB68G5 |
| R16 | 307-0060-00 |) | RES., FXD, CMPSN: 6.8 OHM, 5%, 0.50W | 01121 | EB68G5 |
| R17 | 301-0221-00 |) | RES., FXD, CMPSN: 220 OHM, 5%, 0.50W | | EB2215 |
| R18 | 301-0470-00 |) | RES., FXD, CMPSN: 47 OHM, 5%, 0.50W | 01121 | EB4705 |
| R19 | 307-0051-00 |) | RES., FXD, CMPSN: 2.7 OHM, 5%, 0.50W | 01121 | EB27G5 |
| R20 | 301-0470-00 | | RES., FXD, CMPSN:47 OHM, 5%, 0.50W | | EB4705 |
| R21 | 307-0055-00 | | RES., FXD, CMPSN: 3.9 OHM, 5%, 0.50W | 01121 | |
| R22 | 307-0055-00 | | RES., FXD, CMPSN: 3.9 OHM, 5%, 0.50W | | EB39G5 |
| SCR1 | 151-0533-00 | 1 | SCR: SILICON | | |
| Tl | 118-0514-00 | 1 | XFMR, PWR, STPDN: | | |
| ul | 156-0071-00 | ı | MICROCIRCUIT, LI: VOLTAGE REGULATOR | 04713 | MC1723CL |
| VR5 | 152-0175-00 | 1 | SEMICOND DEVICE: ZENER, 0.4w, 5.6v, 5% | 04713 | SZG35008 |

| OLA No | Tektronix | Serial/Model No. | Maria O. D. C. M. | Mfr | MC De LNI ed e |
|---------|-----------------|------------------|--|-------|-----------------|
| Ckt No. | Part No. | Eff Dscont | Name & Description | Code | Mfr Part Number |
| | | | CHASSIS | | |
| В1 | 119-0721-00 | | FAN, VENTILATING: 75 CFM, 7W, 115VAC, 50/60HZ | 82877 | 027119 |
| В2 | 119-0721-00 | | FAN, VENTILATING: 75 CFM, 7W, 115VAC, 50/60HZ | 82877 | 027119 |
| F1 | 159-0025-00 | | FUSE, CARTRIDGE: 3AG, 0.5A, 250V, FAST-BLOW | 71400 | AGC 1/2 |
| F2 | 159-0025-00 | | FUSE, CARTRIDGE: 3AG, 0.5A, 250V, FAST-BLOW | 71400 | AGC 1/2 |
| F3 | 159-0021-00 | | FUSE, CARTRIDGE: 3AG, 2A, 250V, FAST-BLOW (115V OPERATION) | 71400 | AGC 2 |
| F3 | 159-0029-00 | | FUSE, CARTRIDGE: 3AG, 0.3A, 250V, SLOW-BLOW (230V OPERATION) | 71400 | MDL3/10 |
| F4 | 159-0013-00 | | FUSE, CARTRIDGE: 3AG, 6A, 125V, 7SEC (115V OPERATION) | 71400 | мтн6 |
| F4 | 159-0015-01 | | FUSE, CARTRIDGE: 3AG, 3A, 250V, FAST-BLOW (230V OPERATION) | 71400 | GJV3 |
| Sl | 260-1842-00 | | SWITCH, ROCKER: DPST, 16A, 250VAC | 04009 | 2600-11E 718 |
| S2 | 260-1497-00 | | SWITCH, PUSH: DPDT, 10A, 250VAC | 01963 | E79-30A |

Section 13 DIAGRAMS

Symbols and Reference Designators

Graphic symbols for electrical and logic symbols, used on the diagrams, are based on ANSI Y32.2, 1975, and ANSI Y32.14, 1973, "American National Standards Institute." Logic symbols depict the logic function of the device in positive logic. Copies of these standards can be obtained from the Institute of Electrical and Electronics Engineers, 345 East 47th Street, New York, N.Y., 1017. Exceptions and additions are shown on this sample diagram. These conform or are based on the manufacturers data sheet and industry trends.

Resistor values are in ohms, unless noted otherwise, and the Ω symbol is omitted. Capacitor values \leqslant 1 (e.g. 10) are in picofarads (pF) and values < 1 (e.g. 0.01) are in microfarads unless otherwise noted.

Component Circuit Numbers

Circuit numbers for the components (resistors, IC's, etc.) on the μ Processor Lab modules (boards) are assigned according to their physical location. Some circuit boards have a grid of alphanumeric notation screened or etched on the board. The letters denote row (horizontal) position, the numerals column (vertical) position. Circuit numbers for the schematics or other documentation convert the alpha notation to a number. The letter A converts to 1, B to 2, etc. All component circuit numbers can be found in the Replaceable Electrical Parts List under the assembly number. The schematic assembly number is located in the bottom center of the schematic.


The following prefix letters are used as reference designators to identify components or assembles on the diagrams.

- A Assembly, séparable or repairable circuit board, etc)
- C Capacitor, fixed or variable
- CR Diode, signal or rectifier
- DL Delay line
- DS Indicating device (lamp)
- E Spark Gap, Ferrite bead
- F Fuse
- FL Filter
- H Heat dissipating device (heat sink, heat radiator, etc.)

- HY Hybrid circuit
- Connector, stationary portion
- Relay
- L Inductor, fixed or variable
- P Connector, movable portion
- Q Transistor or silicon-controlled rectifier
- R Resistor, fixed or variable
- RT Thermistor
- S Switch or contactor

- T Transformer
- TC Thermocouple
- TP Test Point
- U Integrated circuit
- V Electron tube
- VR Voltage regulator (zener diode, etc.)
- W Wirestrap or cable
- Crystal
- Z Phase shifter

The following partial diagram illustrates special symbology and practices used on the diagrams with a description of the meaning.

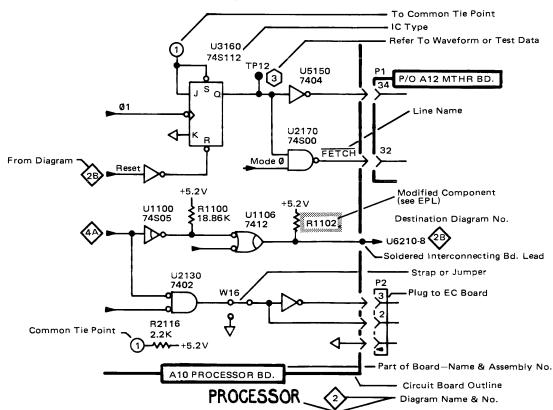

CIRCUIT NUMBER ASSIGNMENT GUIDE


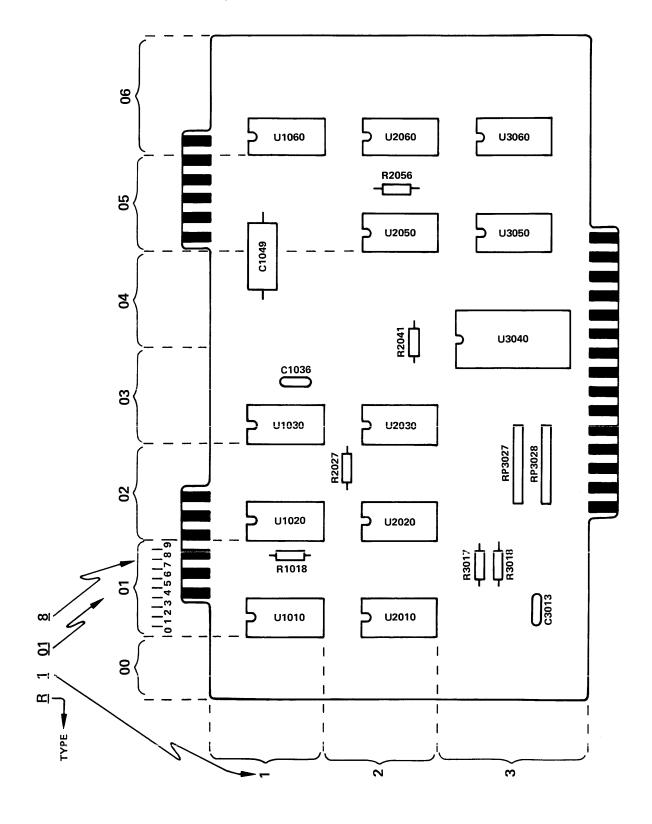


Table 13-1 VCC/GND Pinout of IC Type For 8002 Microprocessor

| Туре | VCC | GND |
|----------------------|----------|--------|
| 1012 | 7 | 14 |
| 1702A | 12 | 14 |
| 2602 | 10 | 9 |
| 2650 | 39 | 21 |
| 2680 | 11 | 22 |
| 3242 | 28 | 14 |
| | _ | |
| 3245 | 11 | 8 |
| 4027P-2 | 9 | 16 |
| 4808A | 18 | 9 |
| 6850 | 12 | 1 |
| 7400 (S) (LS) | 14 | 7 |
| 7402 (S) (LS) | 14 | 7 |
| 7404 (S) (LS) | 14 | 7 |
| 7406 | 14 | 7 |
| 74808 | 14 | 7 |
| 74S10 (LS) | 14 | 7 |
| 7414 (LS) | 14 | 7 |
| 7420 (S) (LS) | 14 | 7 |
| 7430 (LS) | 14 | 7 |
| 7442/7442A | 16 | 8 |
| 74LS86 | 14 | 7 |
| 74109 (LS) | 16 | 8 |
| 74S112 (LS) | 16 | 8 8 |
| 74LS133 | 16 14 | 6 7 |
| 74LS136 | 14 | , 8 |
| 74S139 (LS) 74148 | 16 | 8 |
| 74146 74157 (LS) | 16 | 8 |
| 74LS161 | 16 | 8 |
| 74174 (LS) | 16 | 8 |
| 745175 (LS) | 16 | 8 |
| 74193 (LS) | 16 | 8 |
| 74LS260 | 14 | 7 |
| 74LS279 | 16 | 8 |
| 74S280 | 14 | 7 |
| 74393 | 14 | 7 |
| 74LS670 | 16 | 8 |
| 8T15 | 14 | 7 |
| 8T16 | 14 | 7 |
| 8T26 | 16 | 8 |
| 8T97 | 16 | 8 |
| 8T98 | 16 | 8 |
| 82S62 | 14 | 7 |
| 82S115 | 24 | 12 |
| 82S116 | 16 | 8 |
| 82S2708 | 24 | 12 |
| 9602 | 16 | 8 |
| IM5200 | 24 | 12 |
| 11910200 | 44 | 12 |

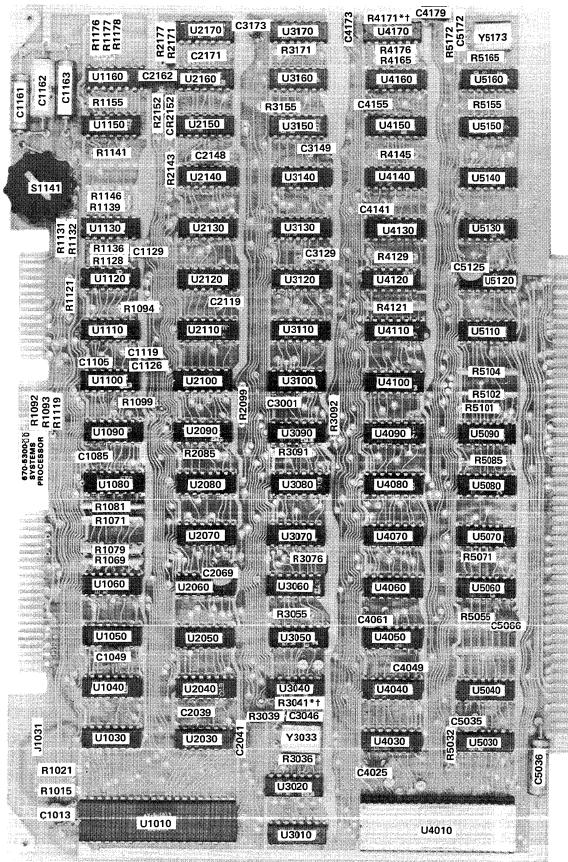



[†]Located on back of board.


A-1 System Processor Module


²³¹²⁻⁹A


^{*}See Parts List for serial number ranges.

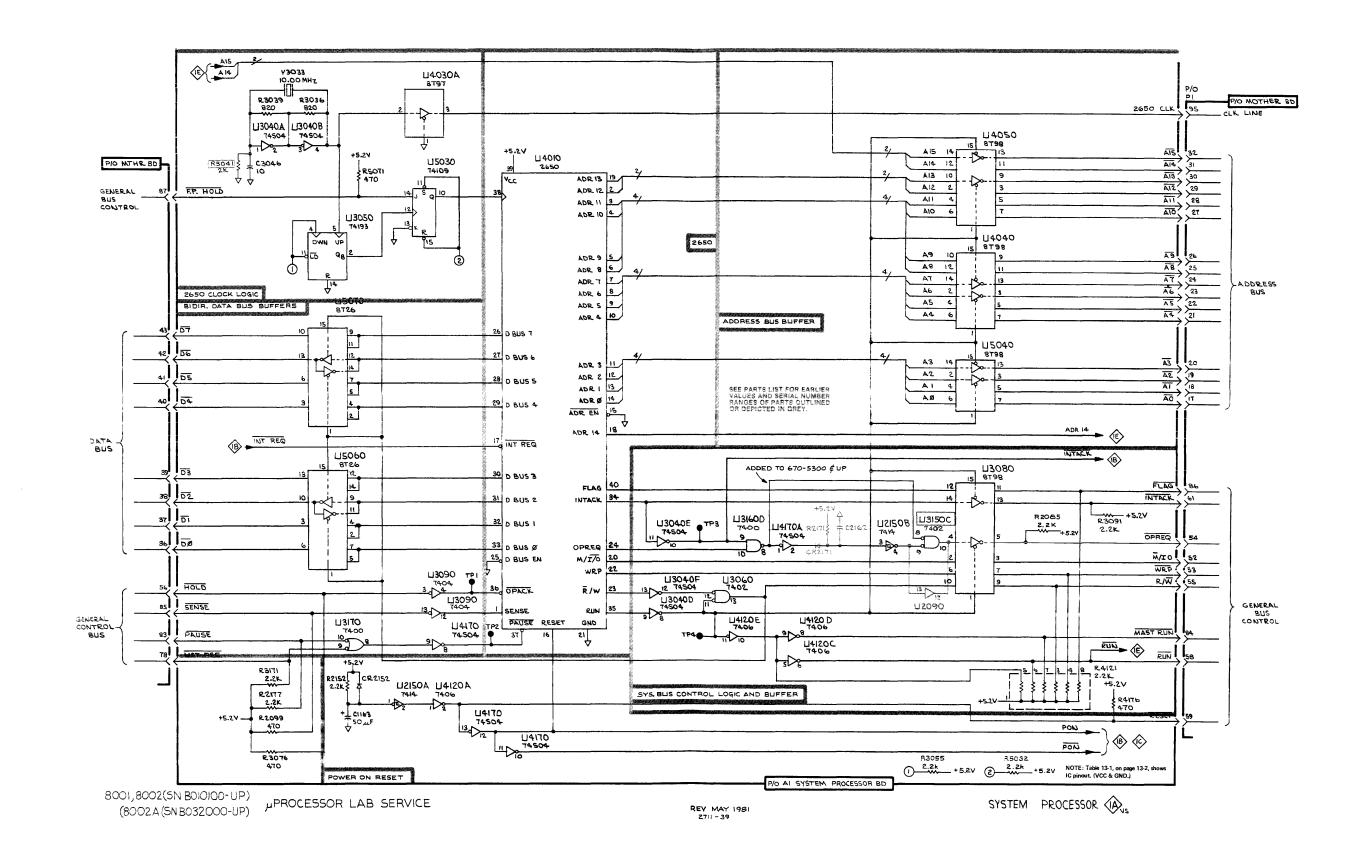


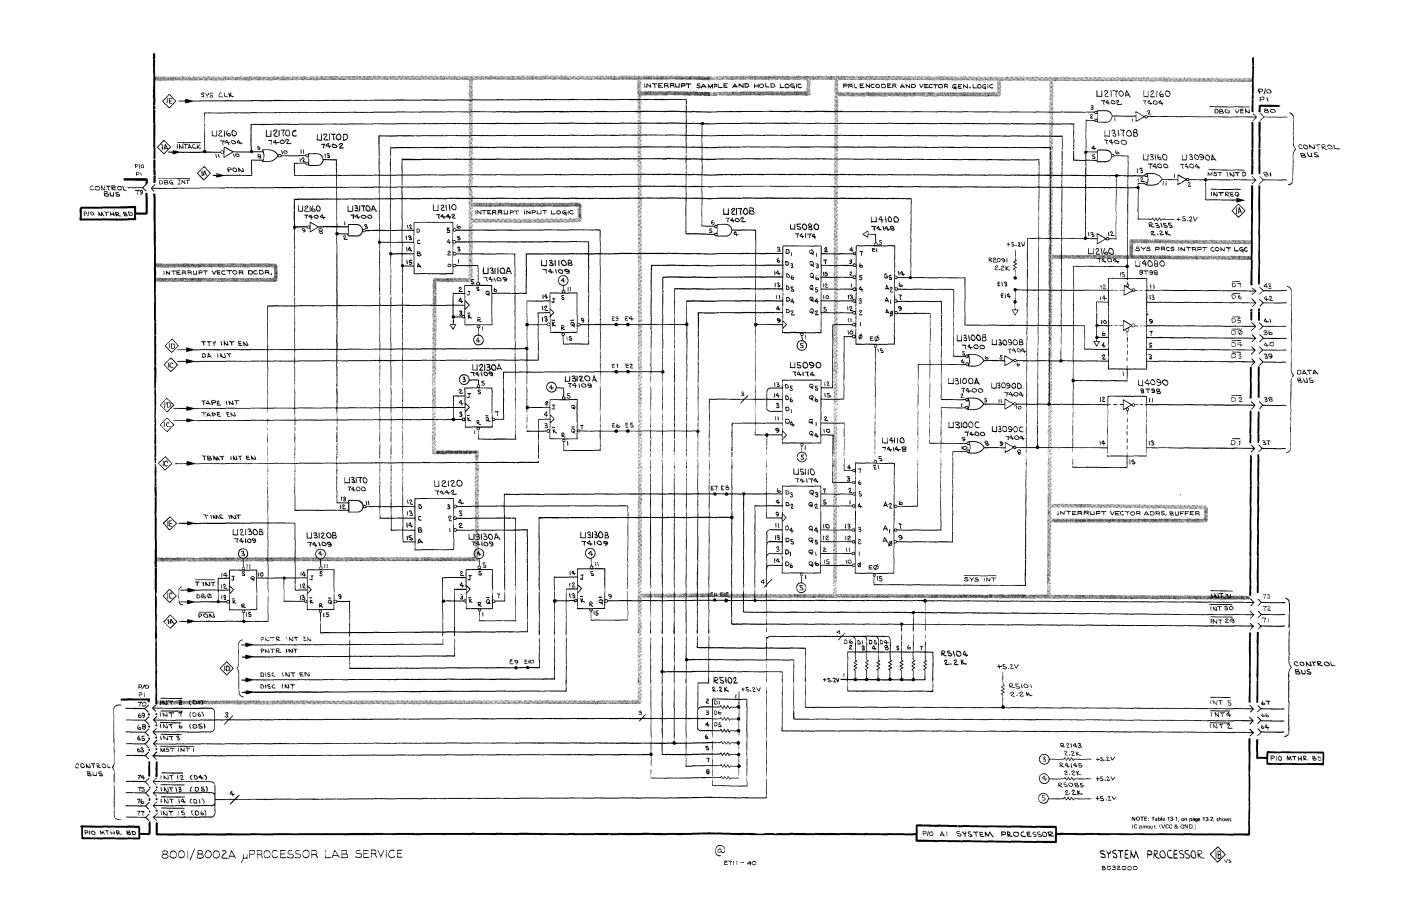

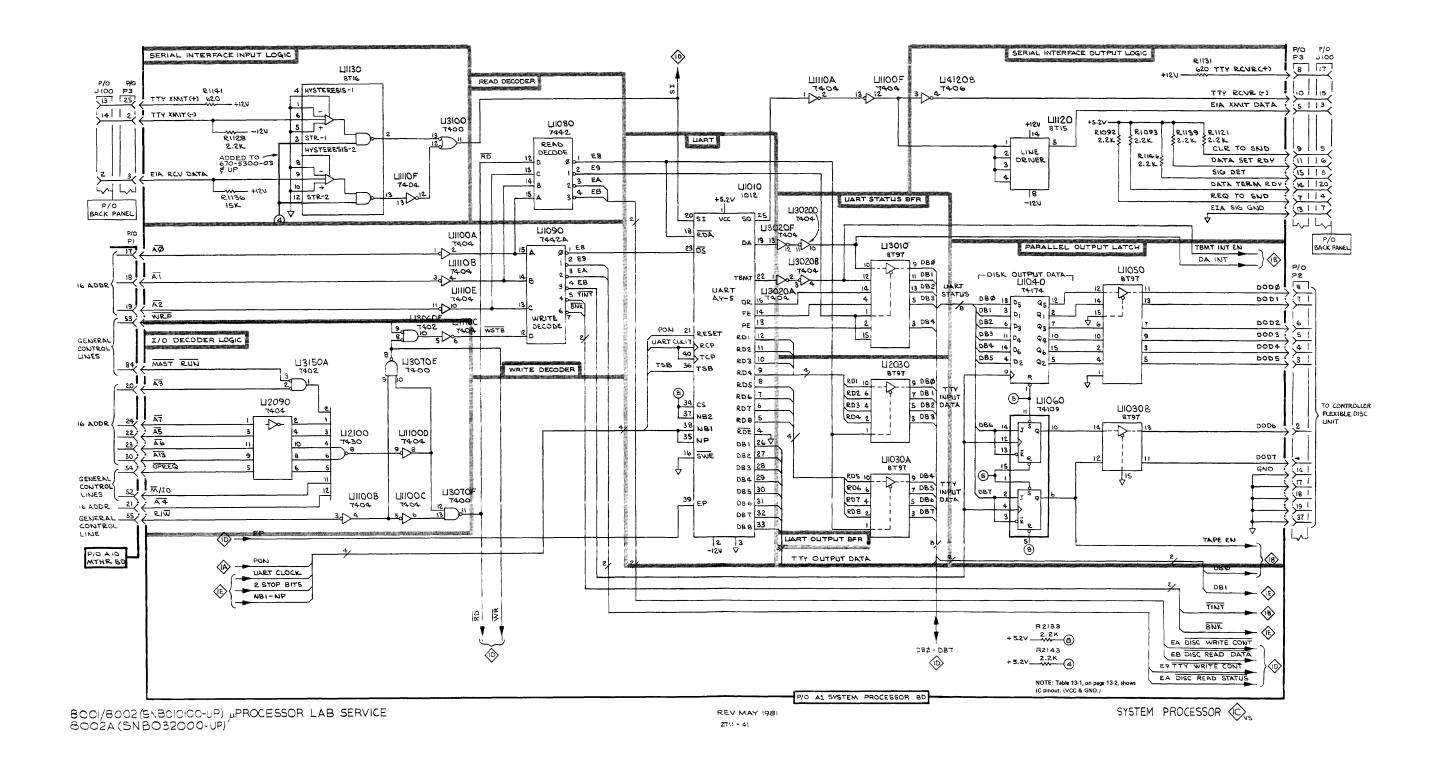

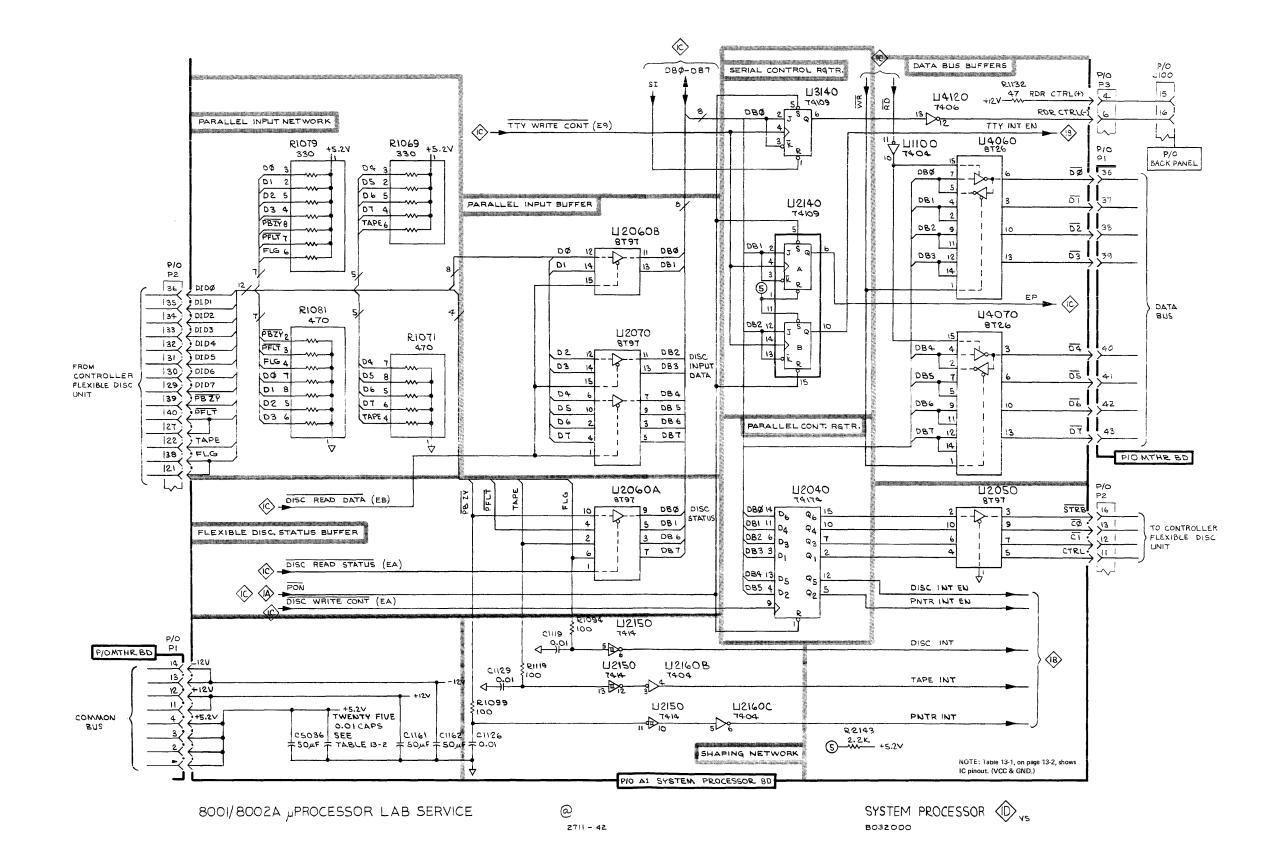

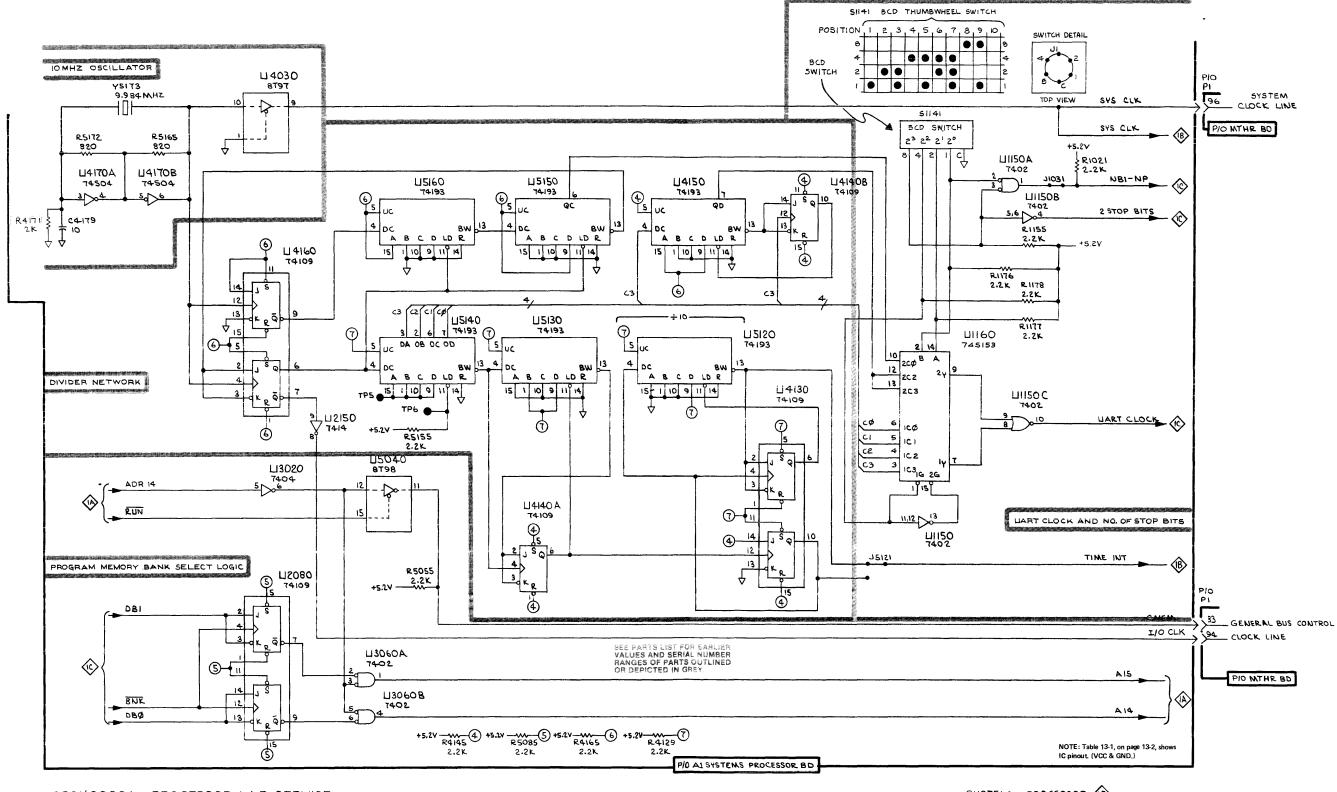


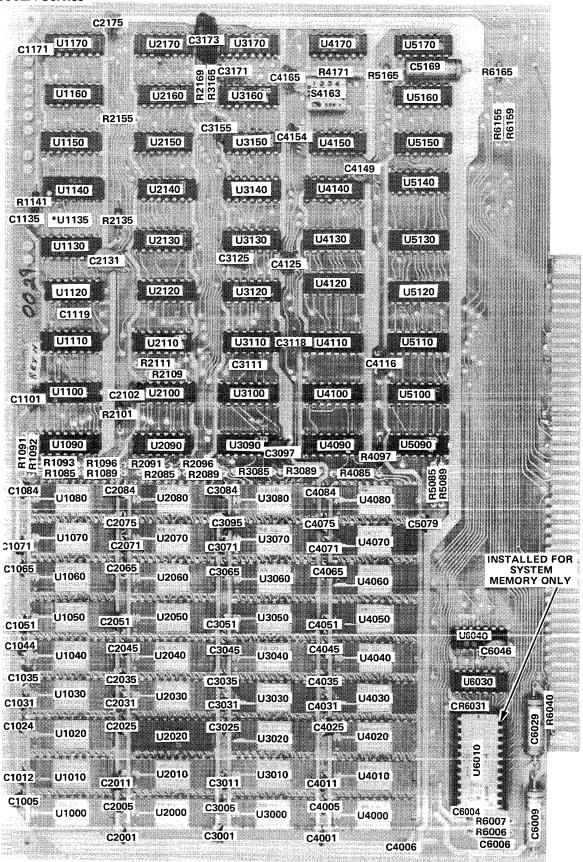



*See parts list


A-20 16K Dynamic RAM Module

2312-10A

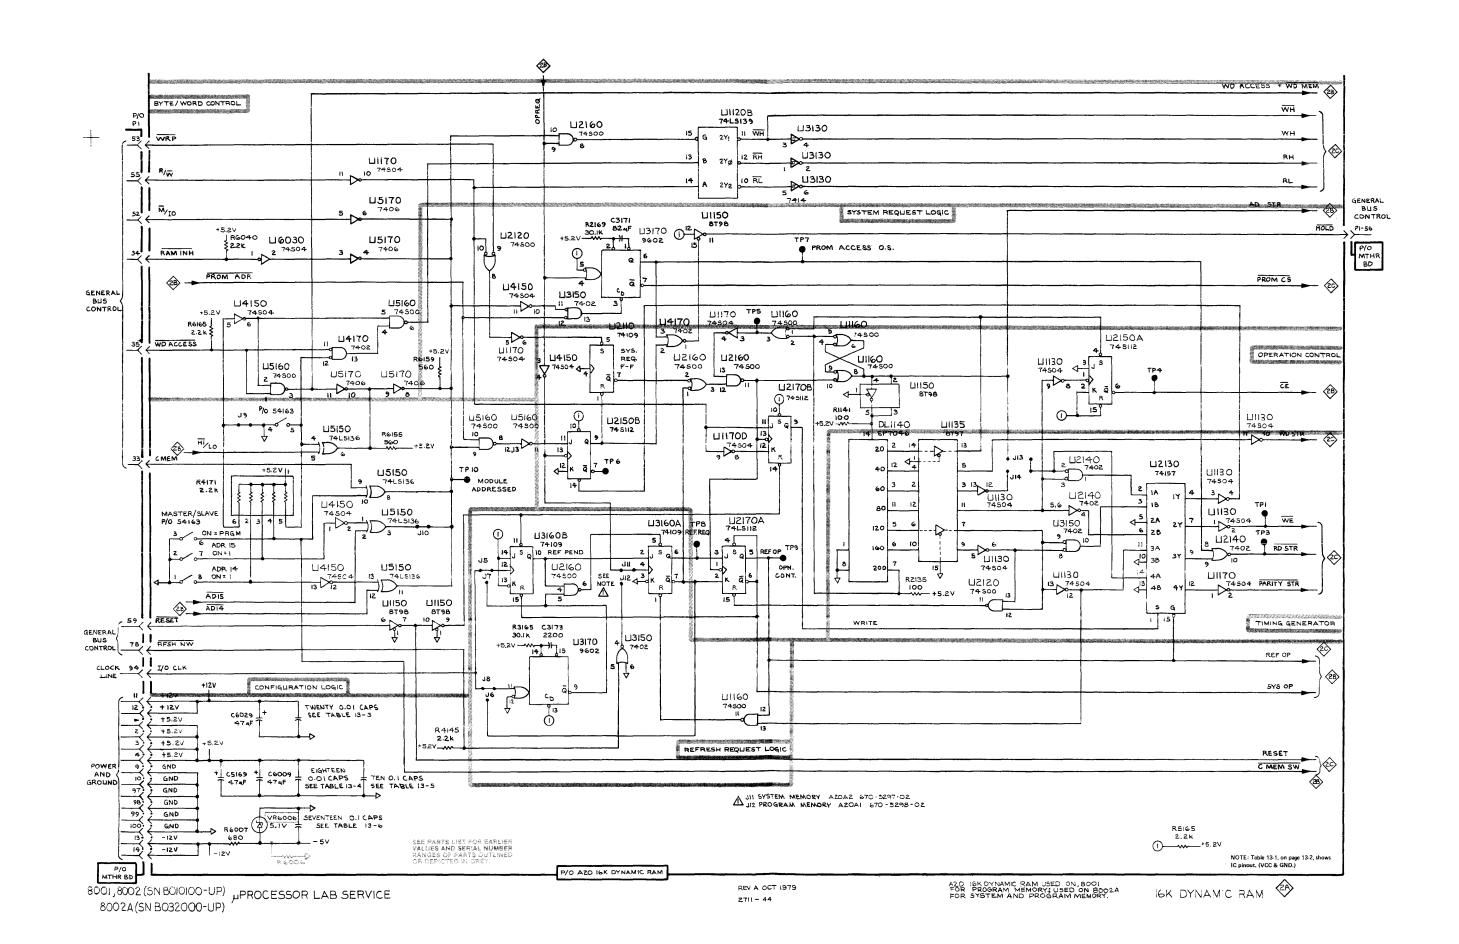


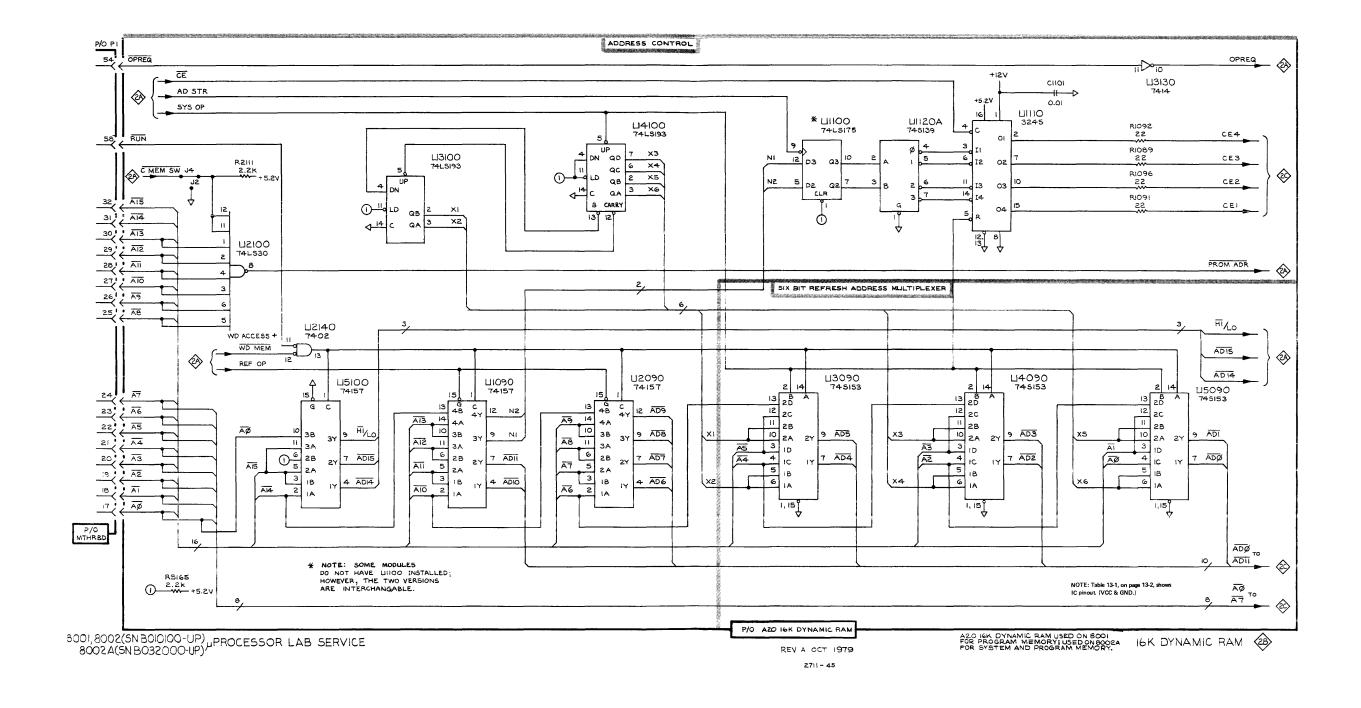


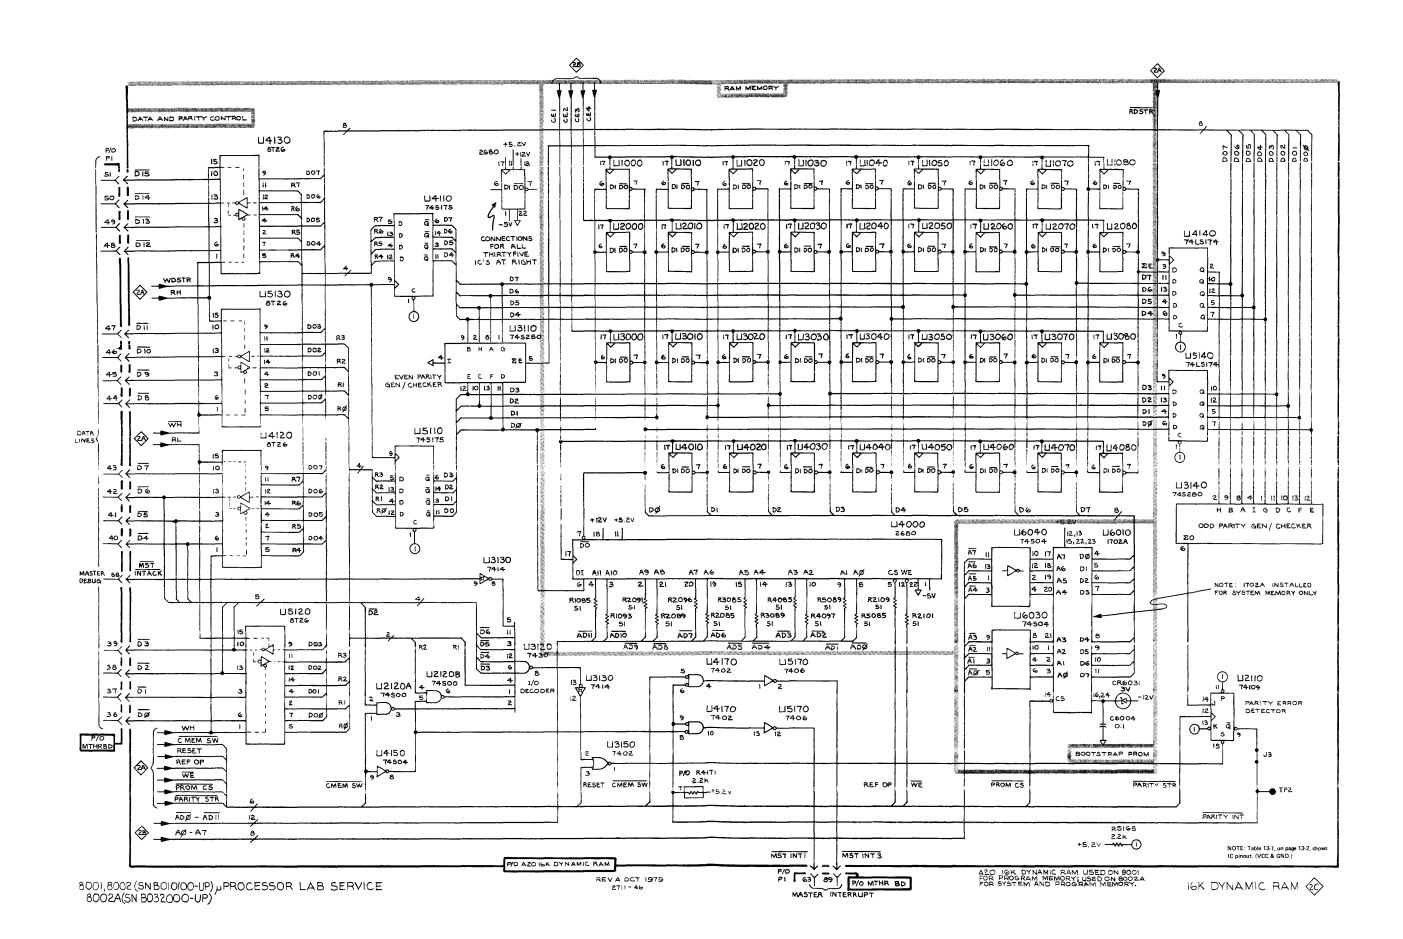

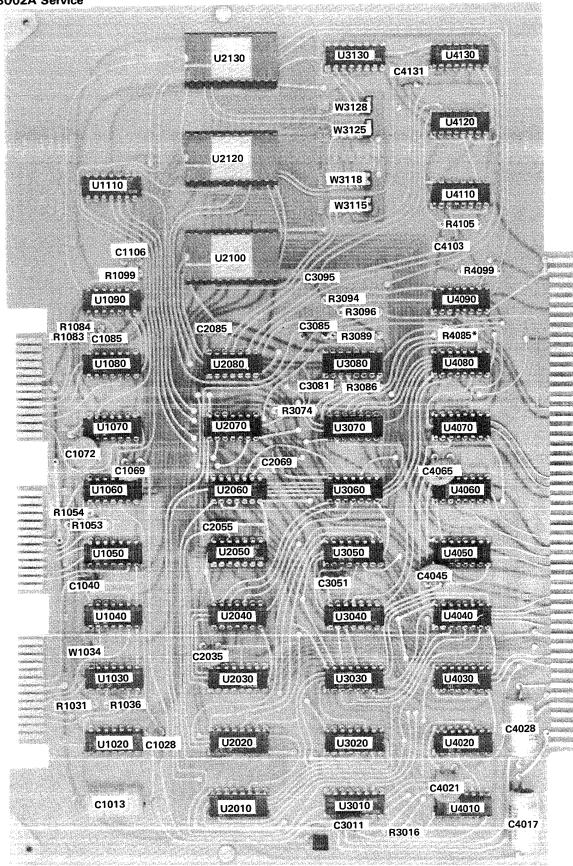


^{*}See Parts List for serial number ranges.

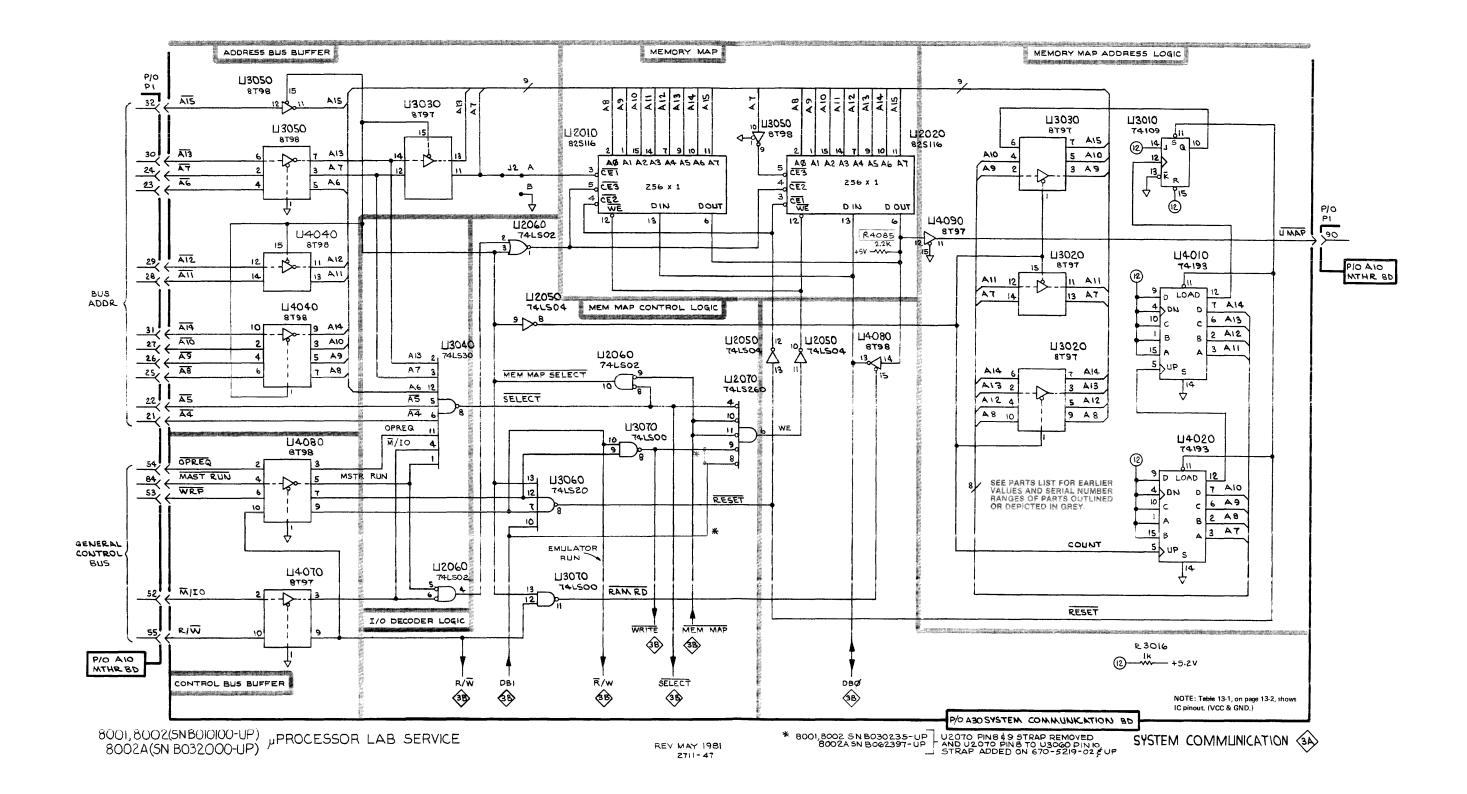

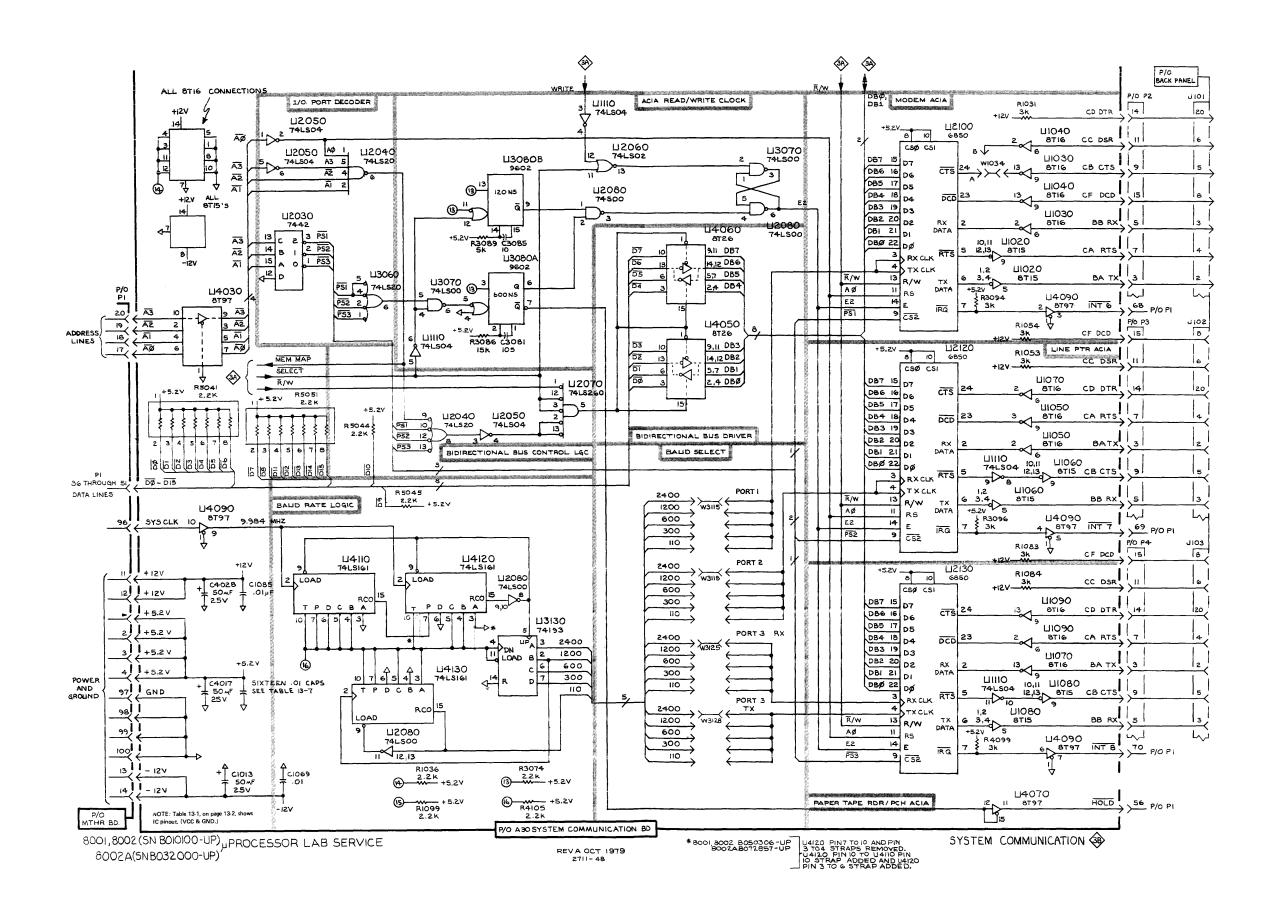



| 66 0 19 19 19 10 10 10 10 10 10 10 10 10 10 10 10 10 | U2160 C2161 | U3160 C3161 | U4160 | % U5160 C5186 | |
|---|----------------|------------------------------|----------------|---|------|
| 900 600 101150 | U2150 | R3155 U3150 | 04150 U4150 | U5150 | |
| U1140 FECTRES | U2140 | U3140 | <u>U4140</u> | U5140 | |
| R1135 U1130 | R2135 U2130 | <u>C3135</u> <u>U3130</u> | _U4130 | U5130 | |
| U1120 R1115 | U2120 | U3120 C3115 | U4120 C4115 | U5120 R5121 | |
| TP5 E U1110 | <u>U2110</u> | <u>U3110</u> | U4110 | U5110 C5105 | |
| TP2 U1100 | <u>U2100</u> | U3100 | U4100 | <u>U5100</u> | |
| TP6 C1101 TP6 U1090 | C2095 U2090 | C3095 U3090 | R4095 U4090 | <u>U5090</u> | |
| R1085 | C2091 U2080 | U3080 | U4080 | C5089 U5080 | |
| C1081 U1070 | C2075 U2070 | U3070 | U4070 | U5070 | |
| 喜。加 | SAME | | | Mark. | |
| U1060 | <u>U2060</u> | U3060 | U4060 | U5060 | |
| U1050 | U2050 | U3050 | U4050 | U5050 | |
| U1040 | U2040 | U3040 | U4040 | U5040 | Ē |
| U1030 | U2030 C2025 | U3030 | U4030 C4025 | C5035 U5030 C5025 | |
| U1020 | U2020 | U3020 | U4020 | U5020 | 0700 |
| 2 <u>U1010</u> | R2015 U2010 | U3010 | U4010 | U5010 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | |


2312-12

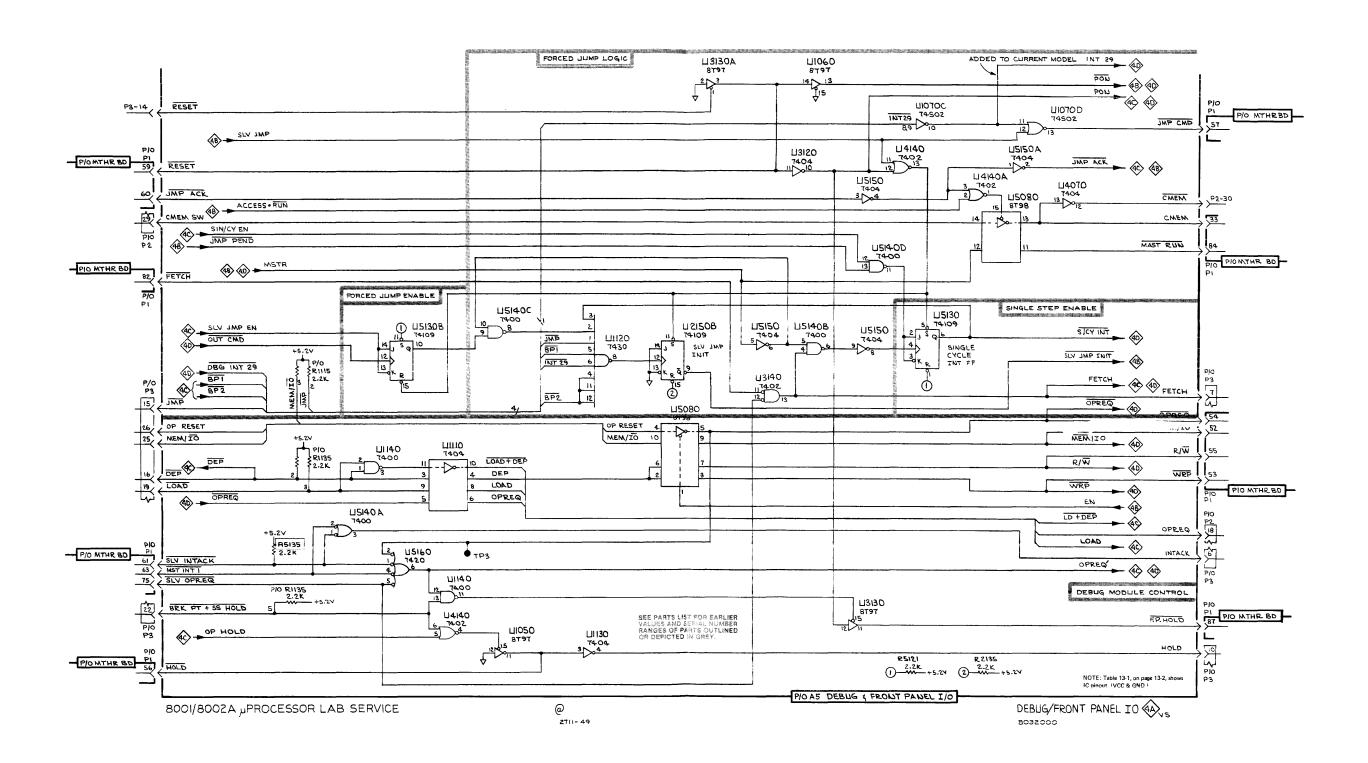


.

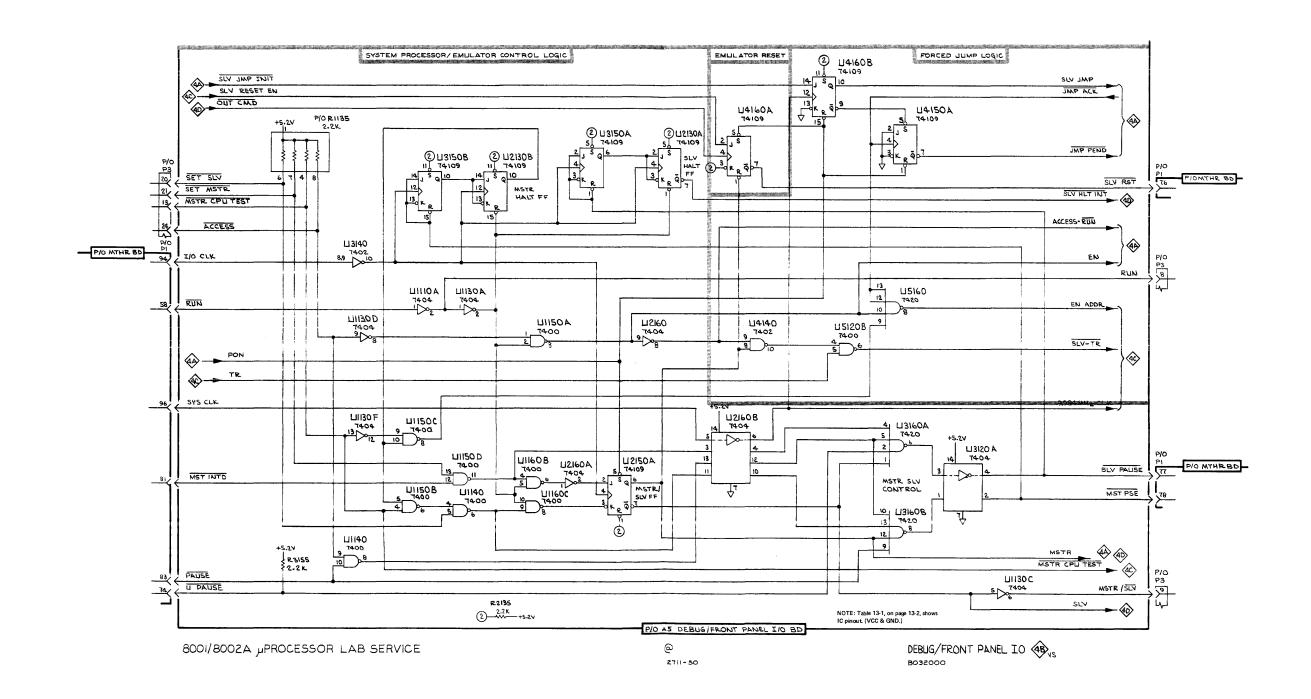


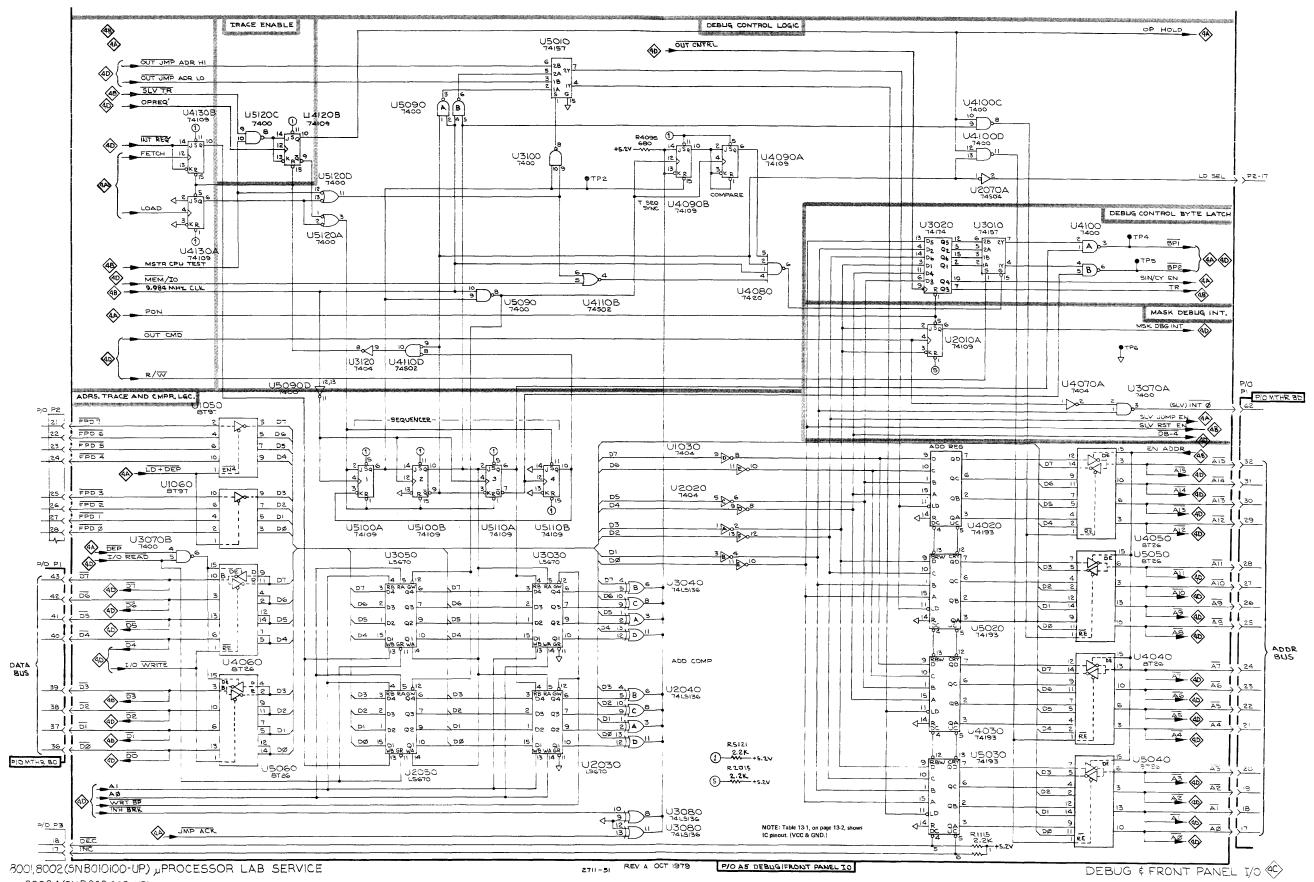


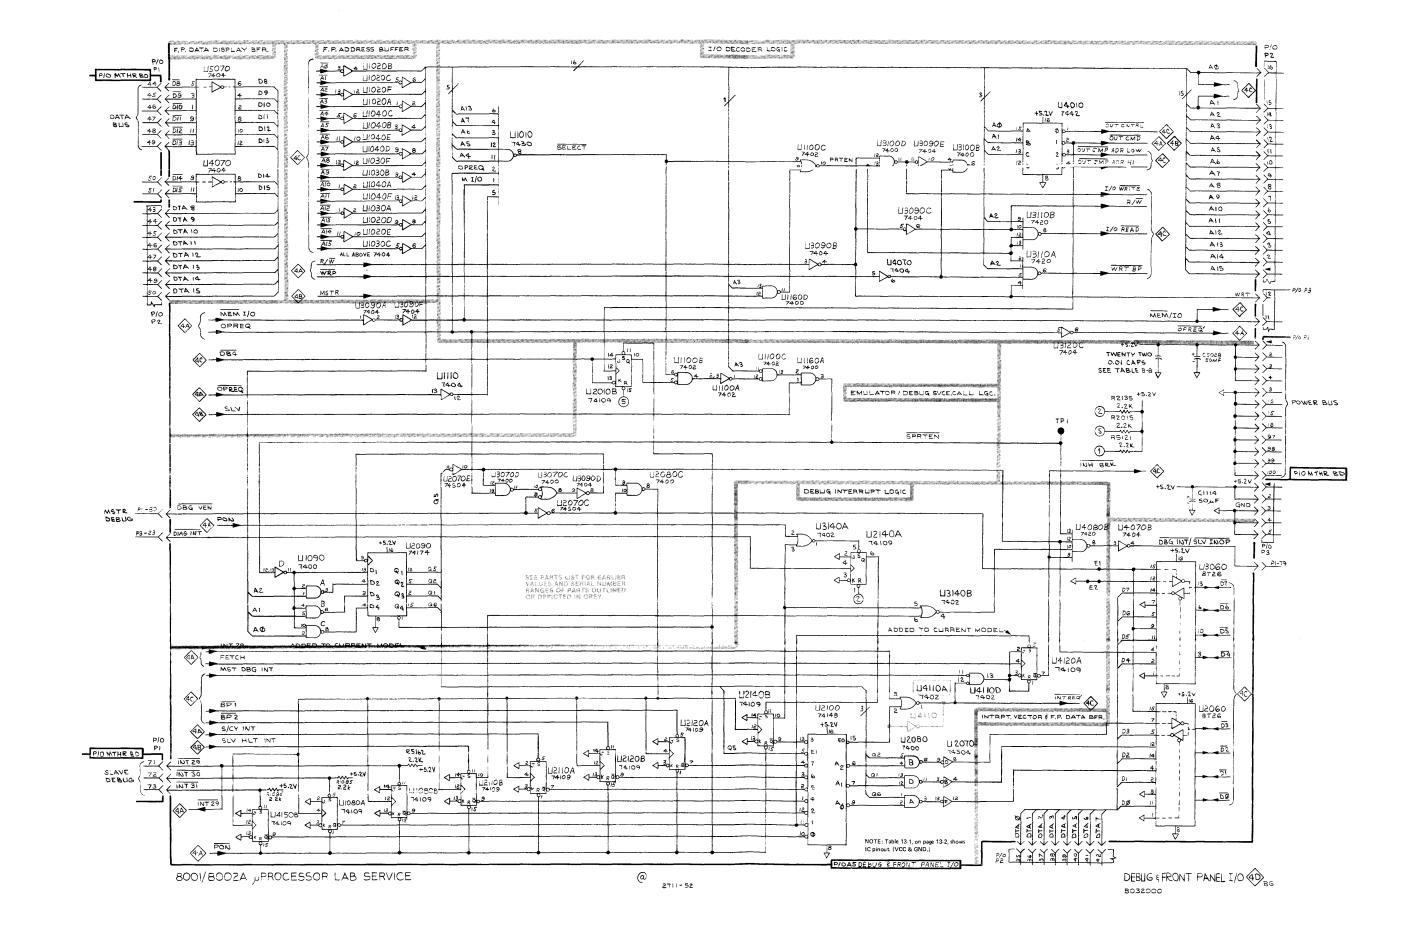


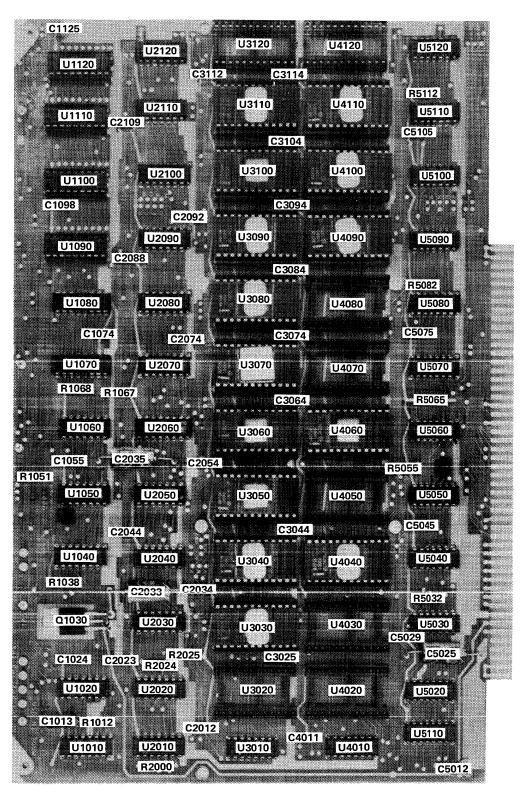



A-15 8001 System Memory Module

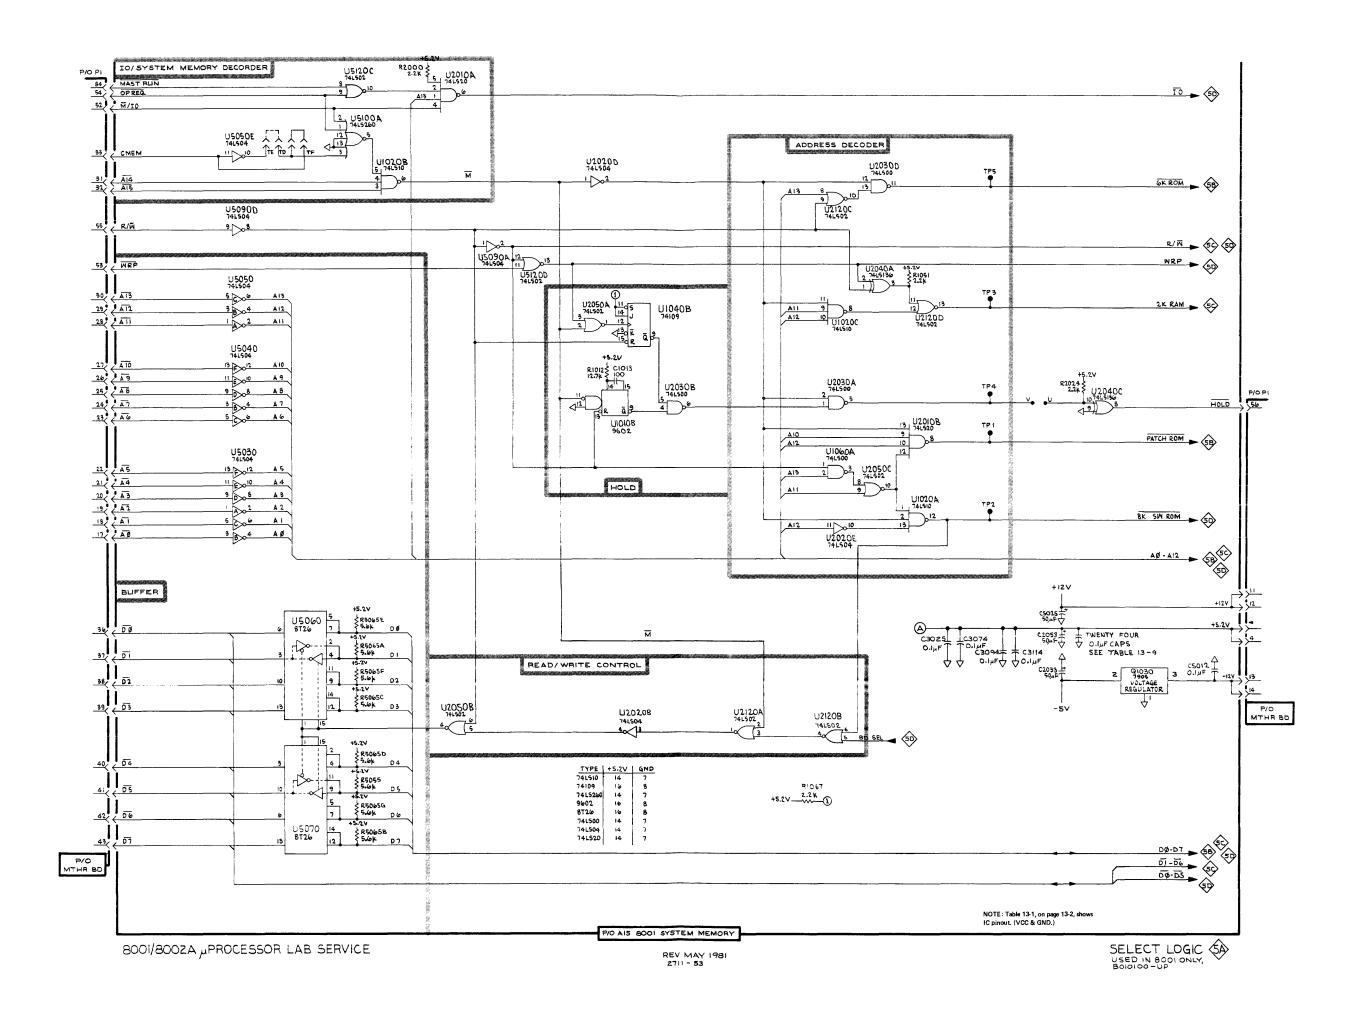

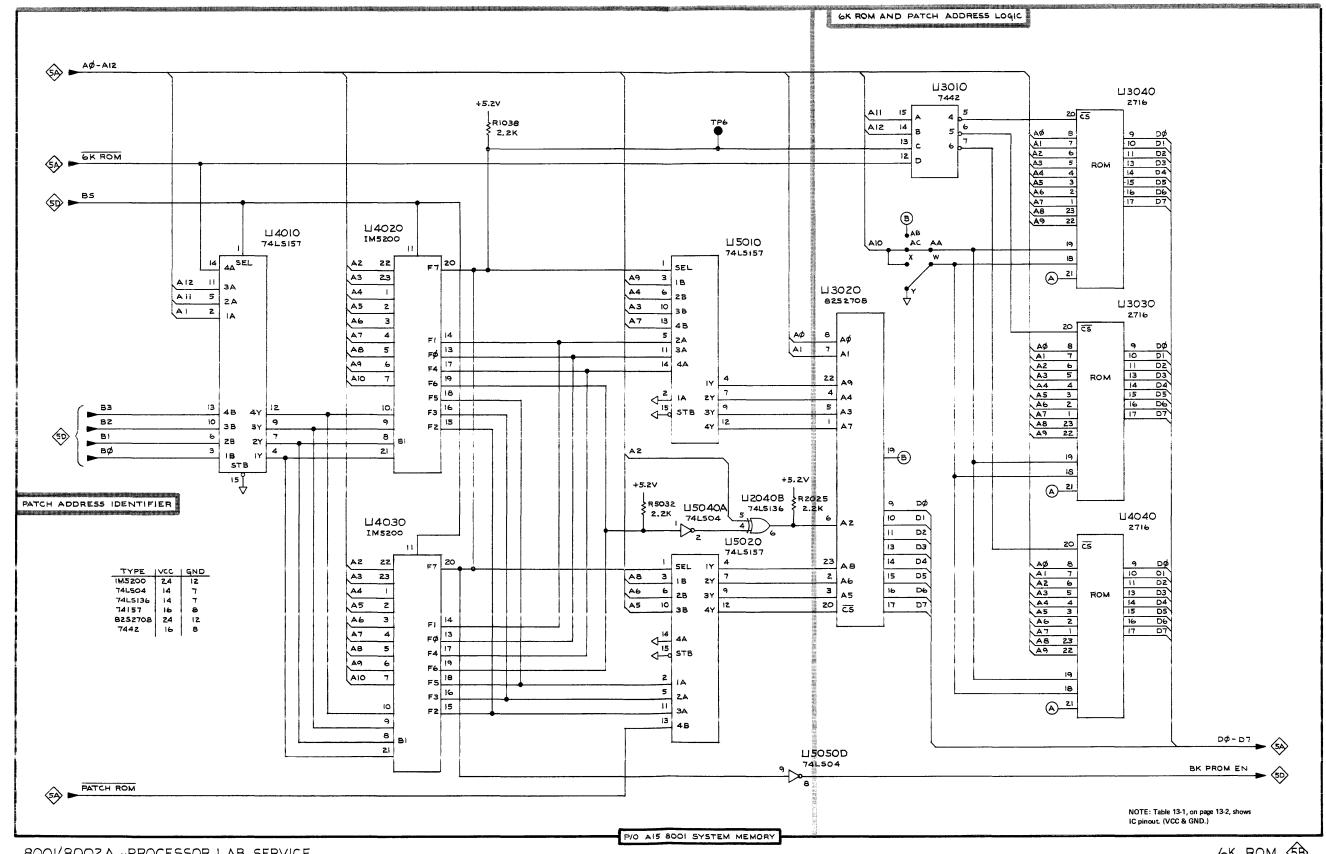


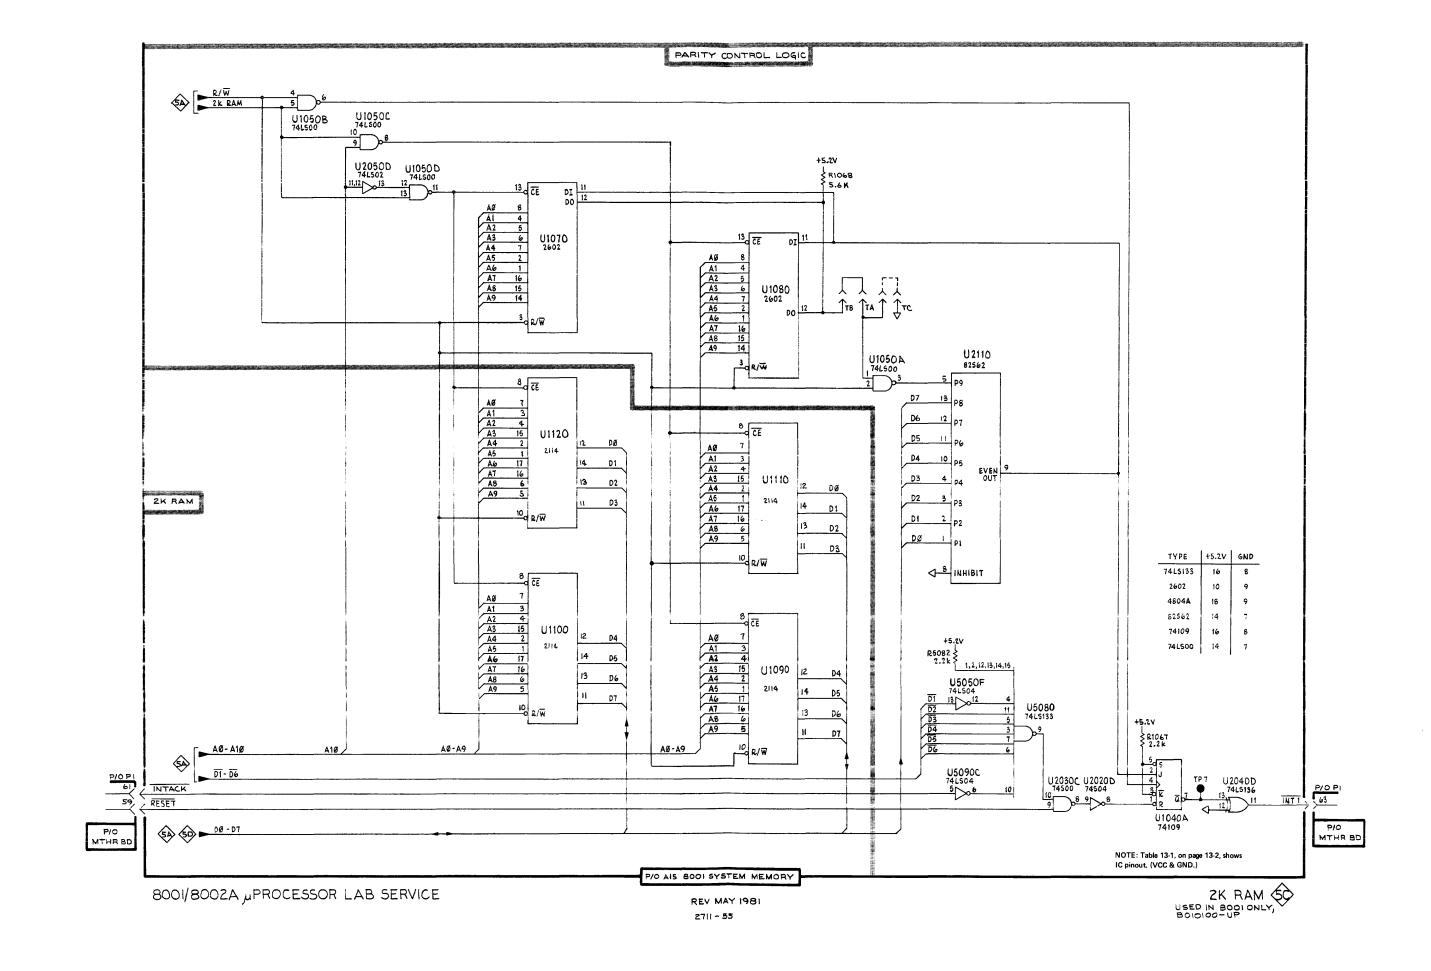


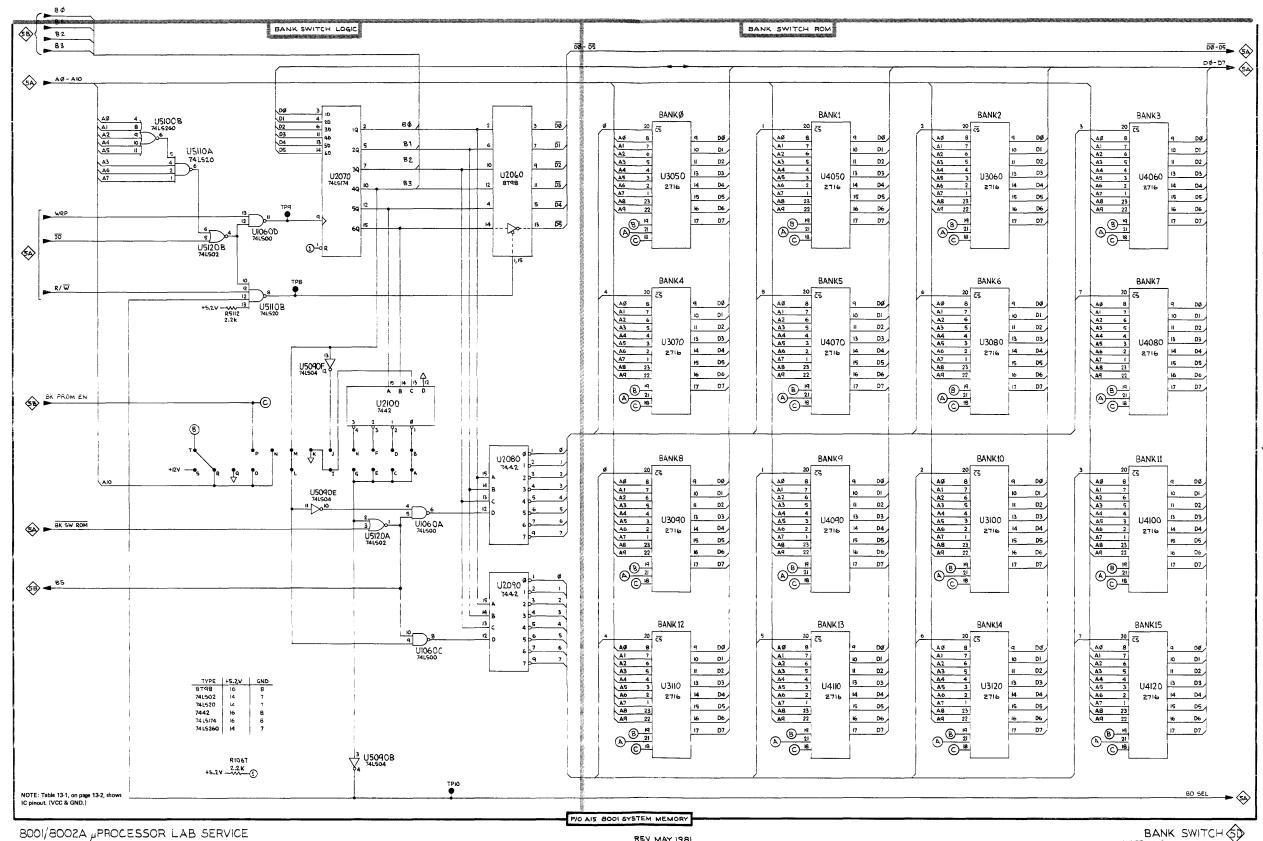

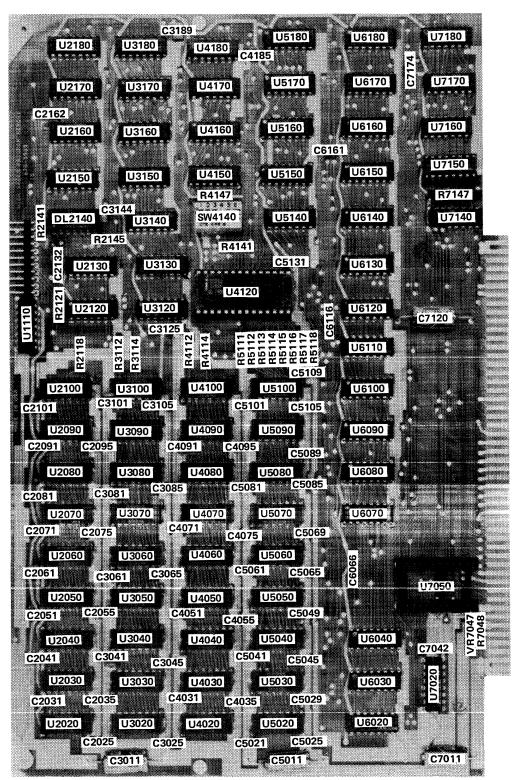

A-25 High-Speed Memory Module

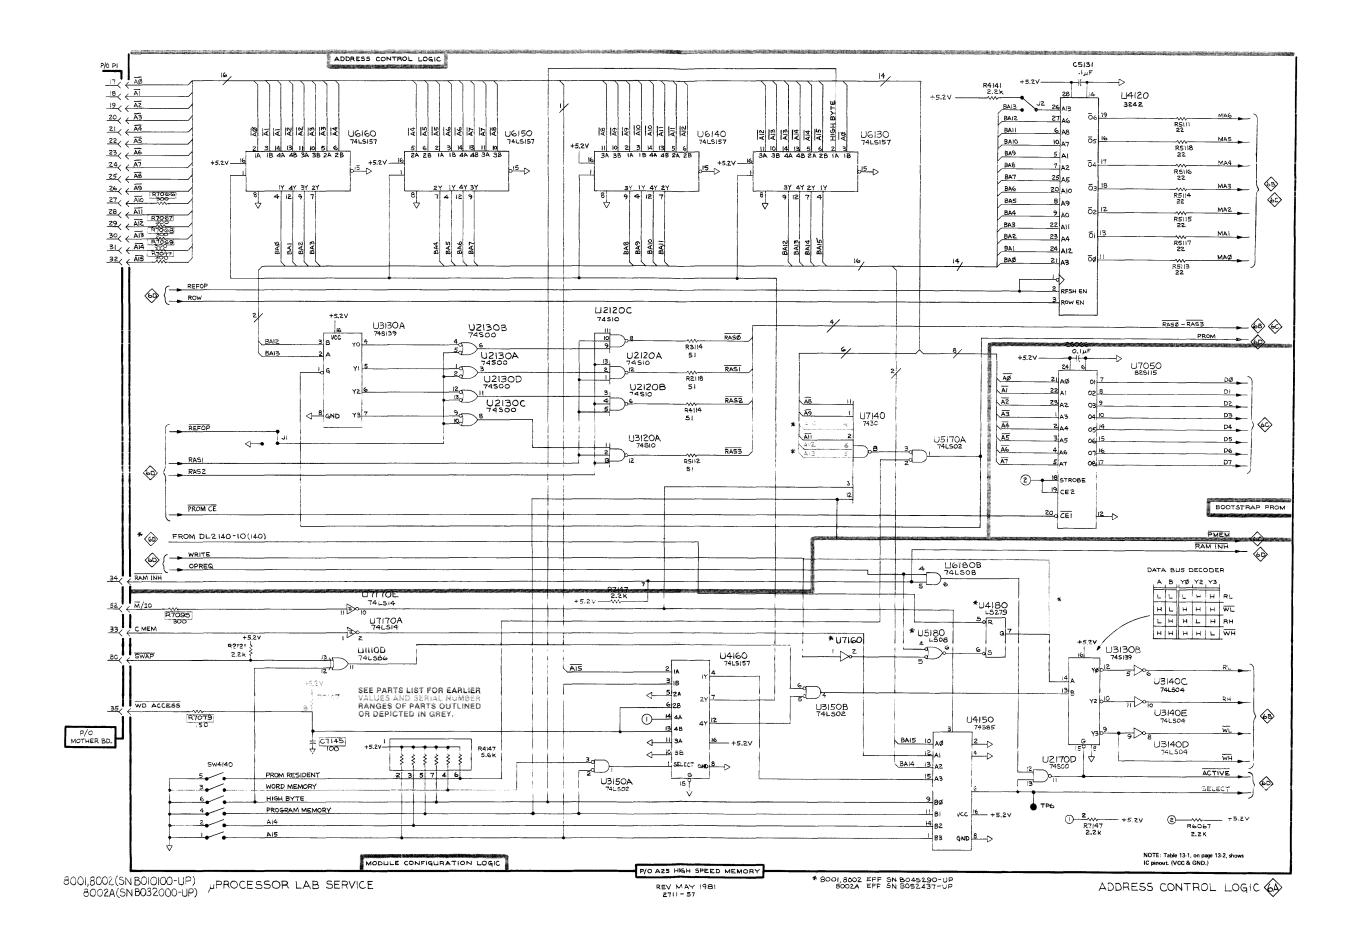

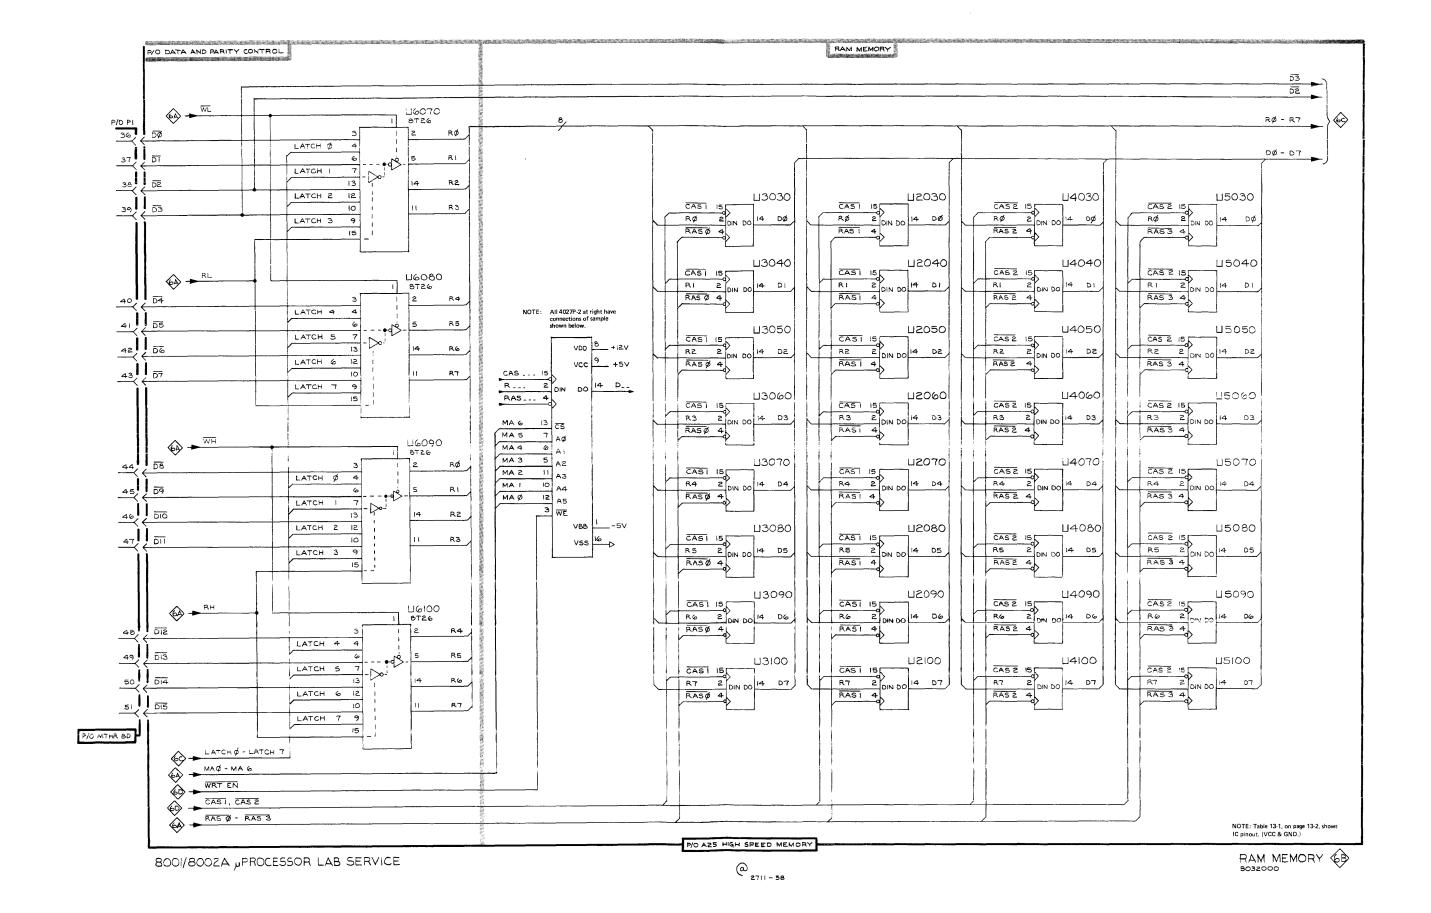



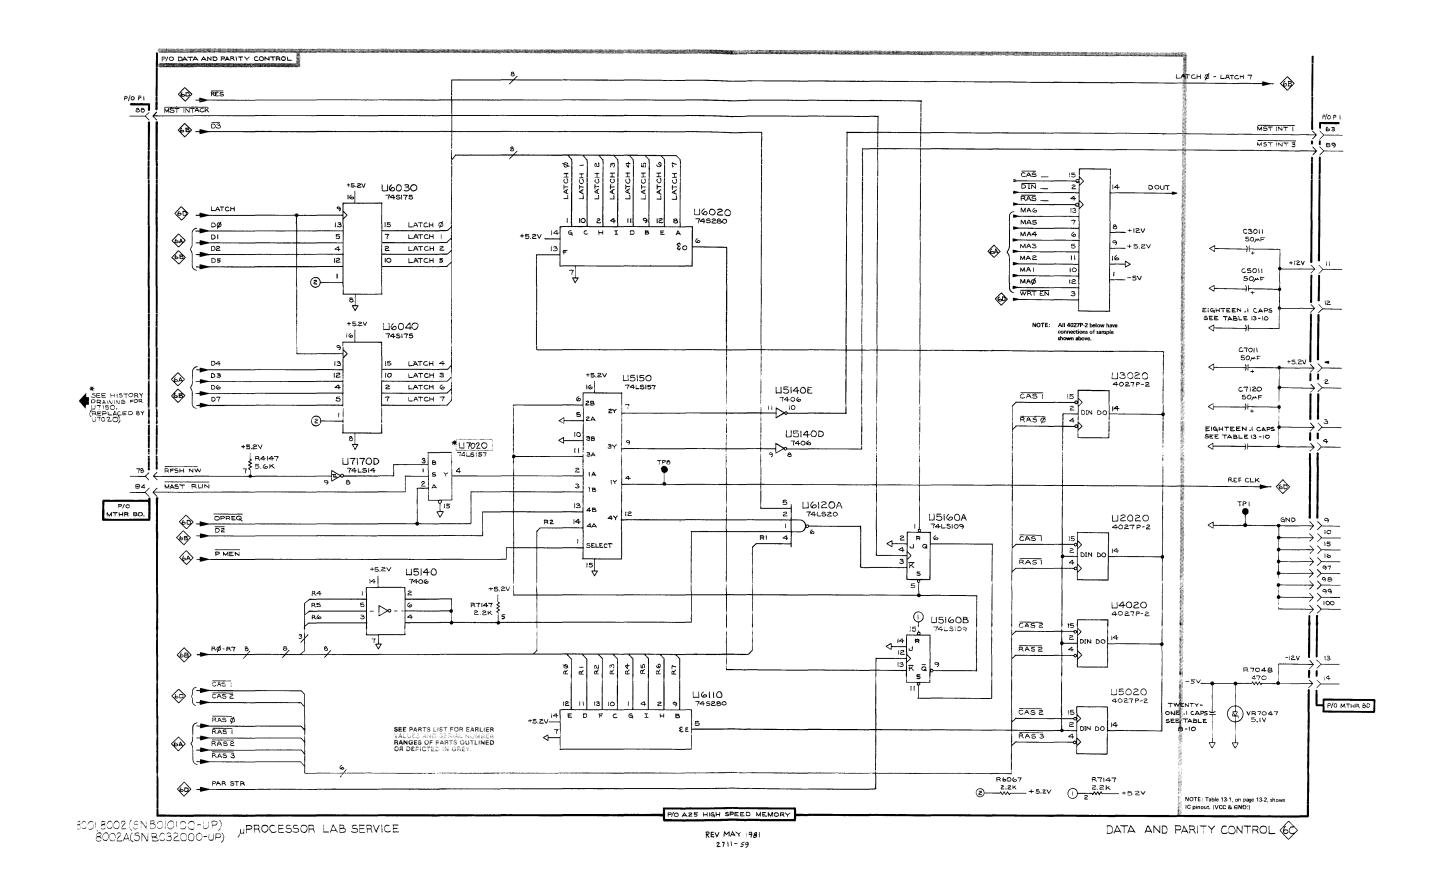


Table 13-10 CAPACITOR INFORMATION

| +5.2 V | –12 V | +12 V |
|--------|-------|-------|
| C2025 | C2041 | C2035 |
| C2031 | C2061 | C2055 |
| C2051 | C2081 | C2075 |
| C2071 | C2101 | C2095 |
| C2091 | C2132 | C3025 |
| C3041 | C2162 | C3045 |
| C3061 | C3125 | C3065 |
| C3081 | C3144 | C3085 |
| C3101 | C3189 | C3105 |
| C4031 | C4185 | C4035 |
| C4051 | C5029 | C4055 |
| C4071 | C5049 | C4075 |
| C4091 | C5069 | C4095 |
| C5021 | C5089 | C5025 |
| C5041 | C5109 | C5045 |
| C5061 | C5131 | C5065 |
| C5081 | C6066 | C5085 |
| C5101 | C6116 | C5105 |
| C6161 | C6161 | |
| | C7042 | |
| | C7174 | |
| | | |





8001,8002 670-5505-03 & BELOW 8002A 670-5505-07 & BELOW

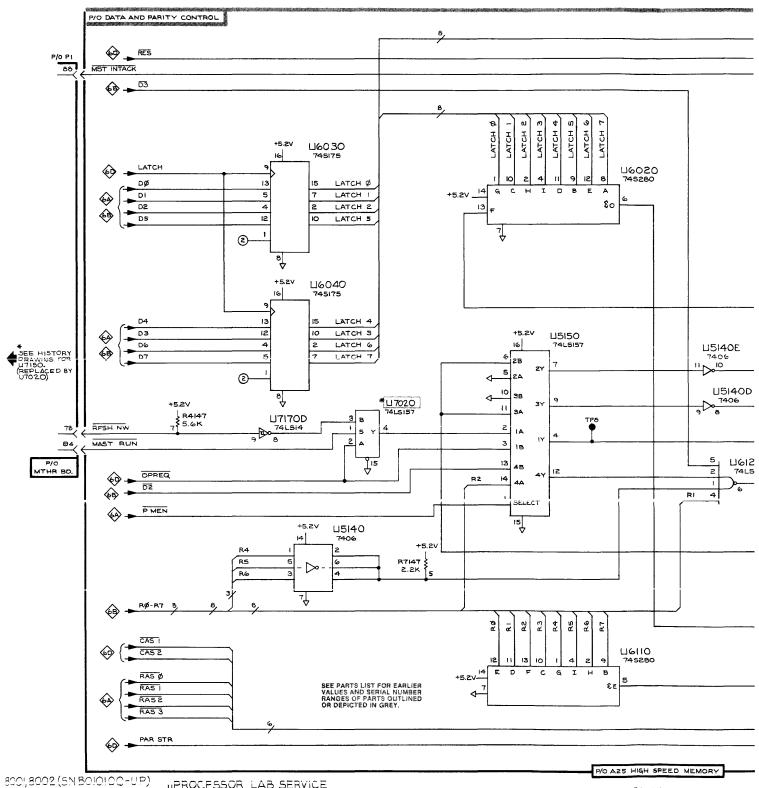


8001,8002 (5NB01010C-UP) processor LAB SERVICE 8002A(SNB032000-UP)


REV MAY 1981 2711-59

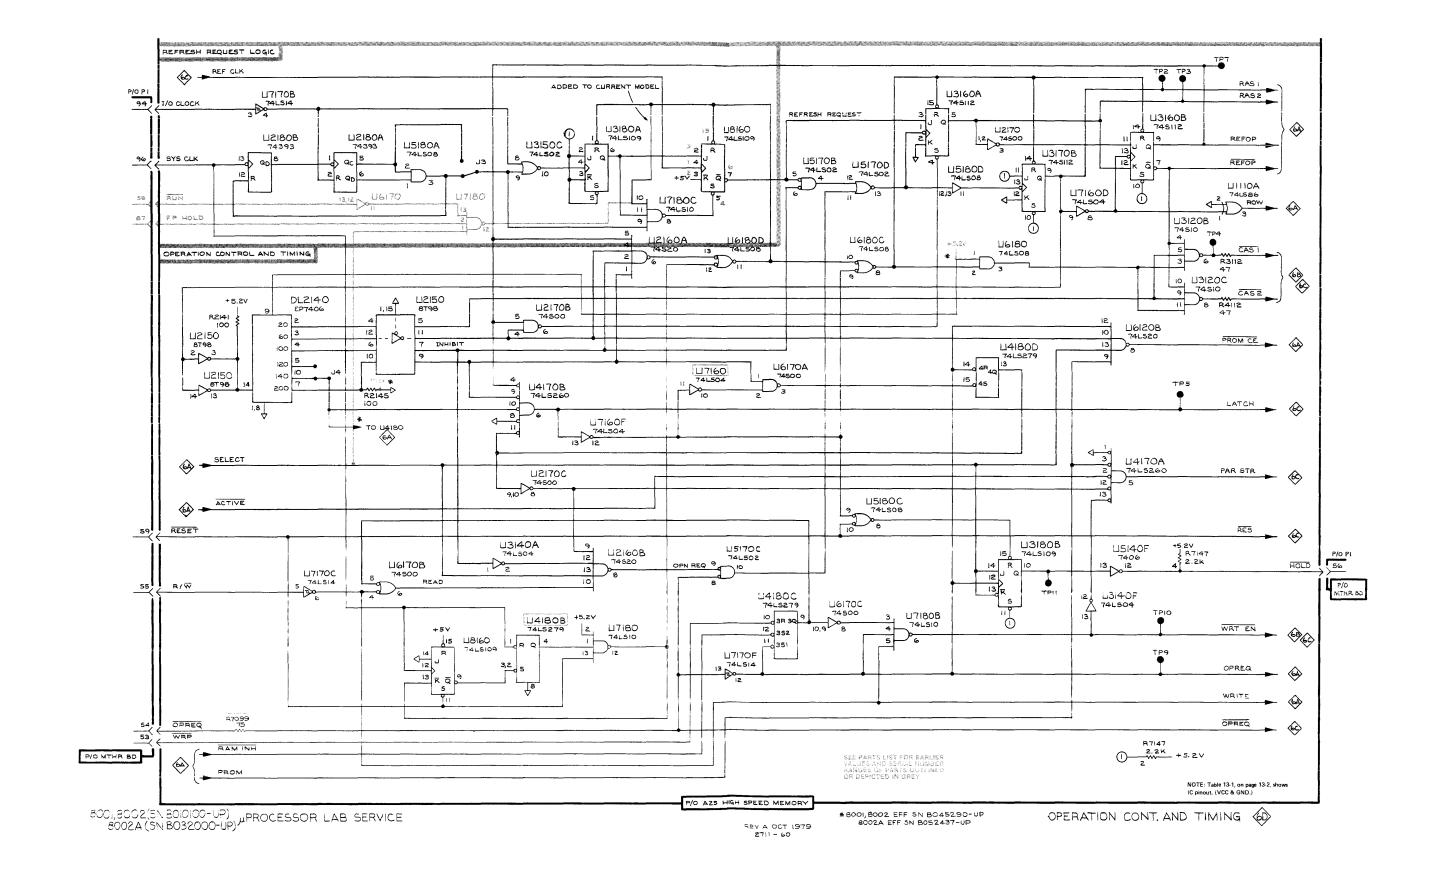


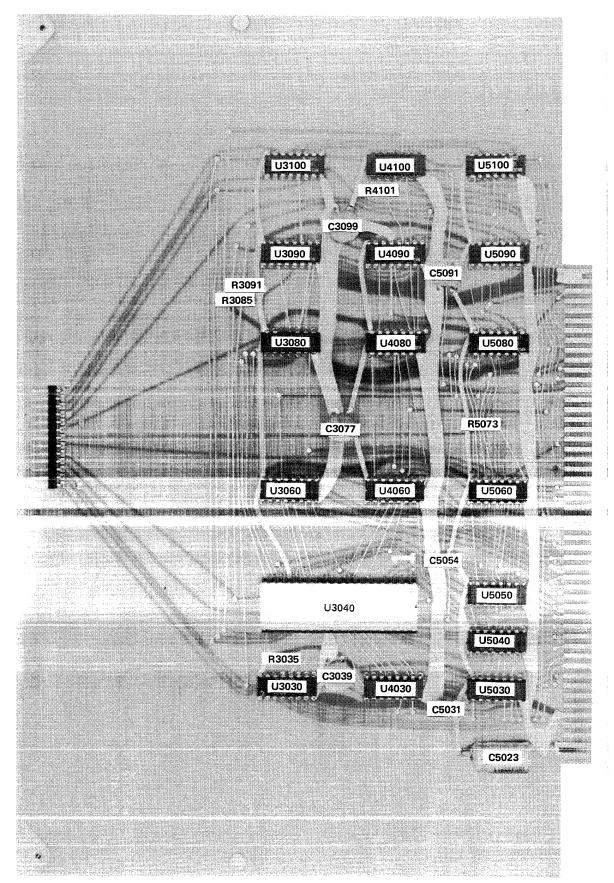

2312-13

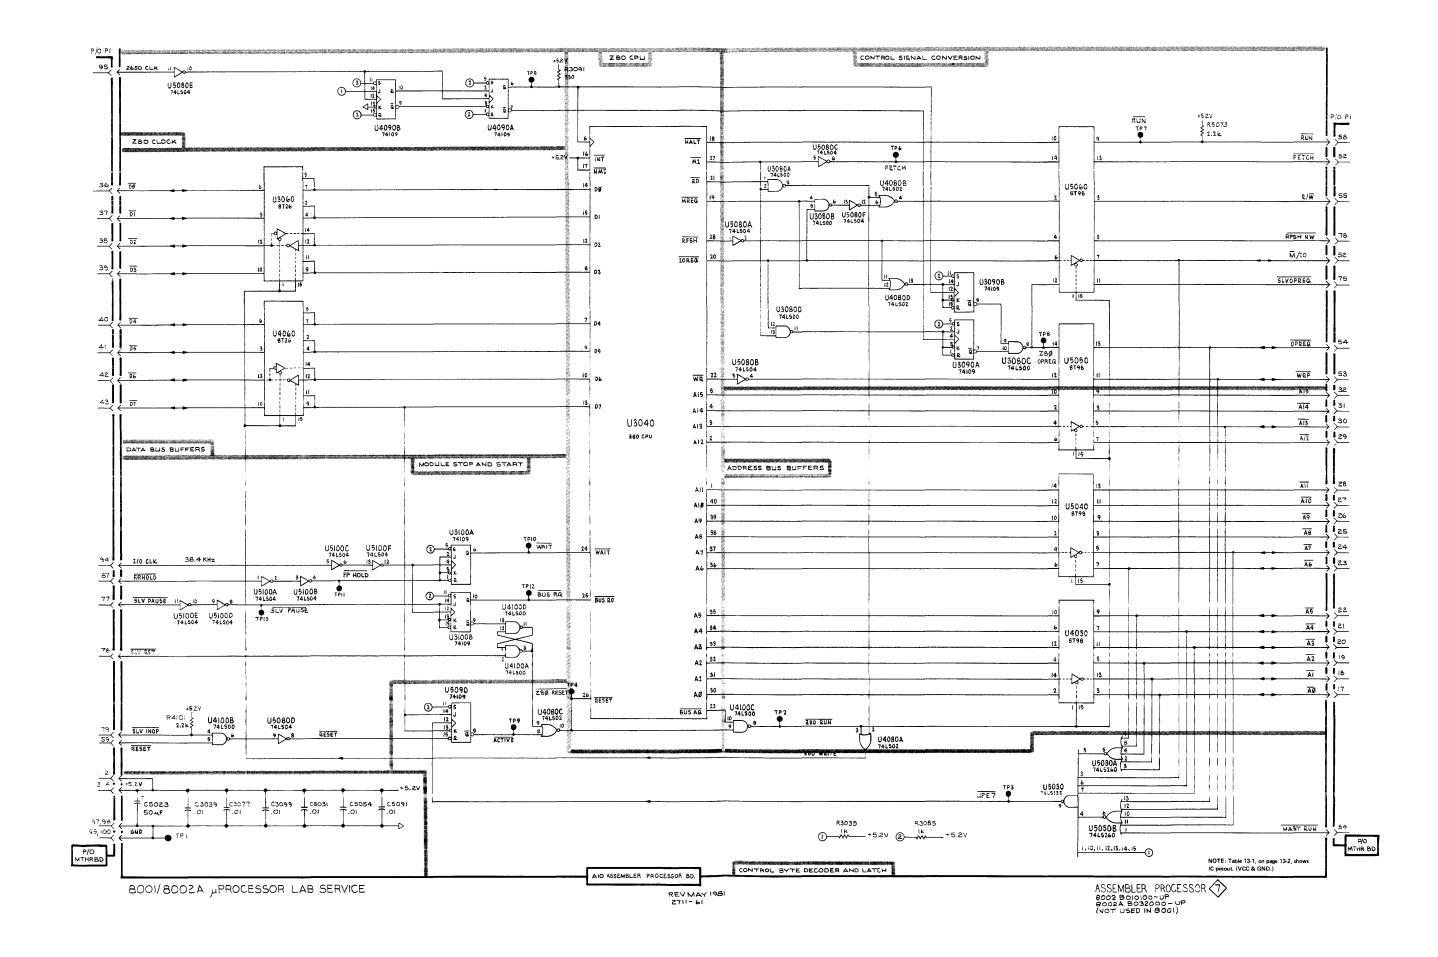


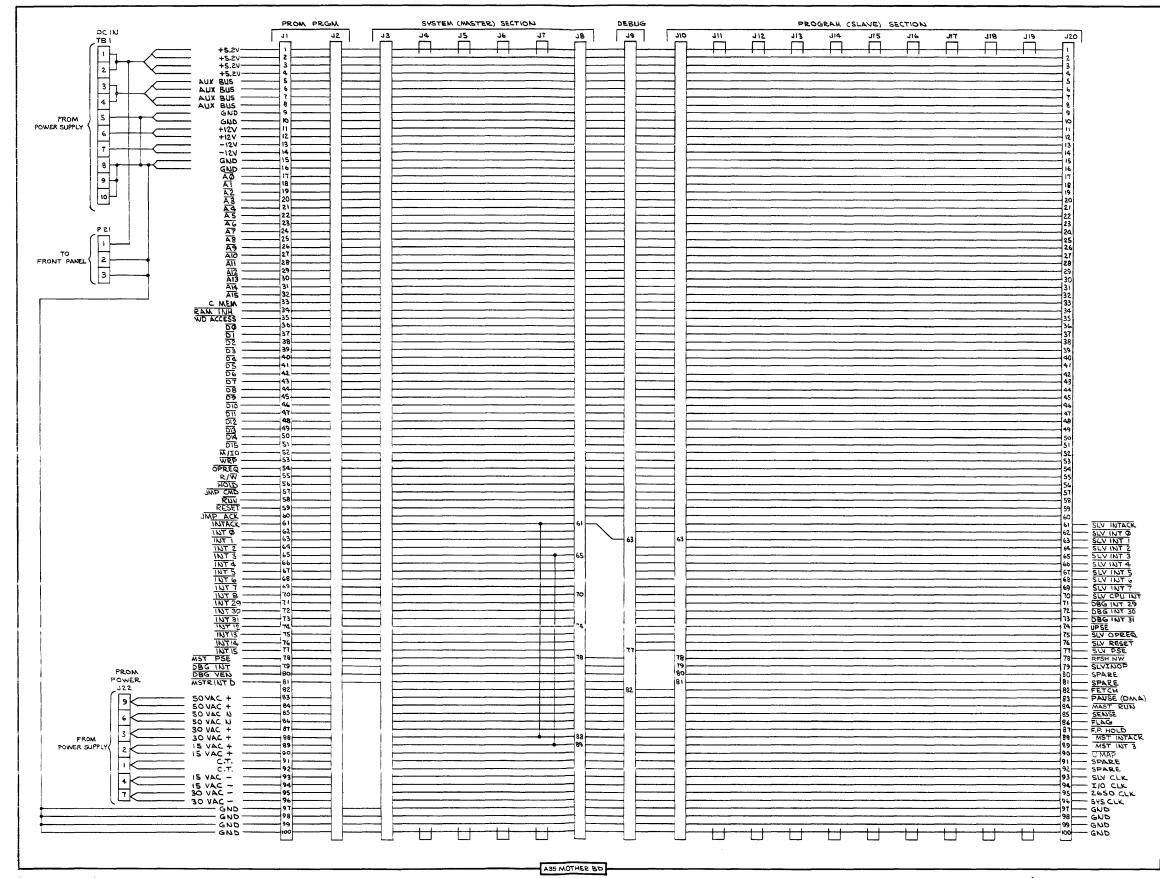


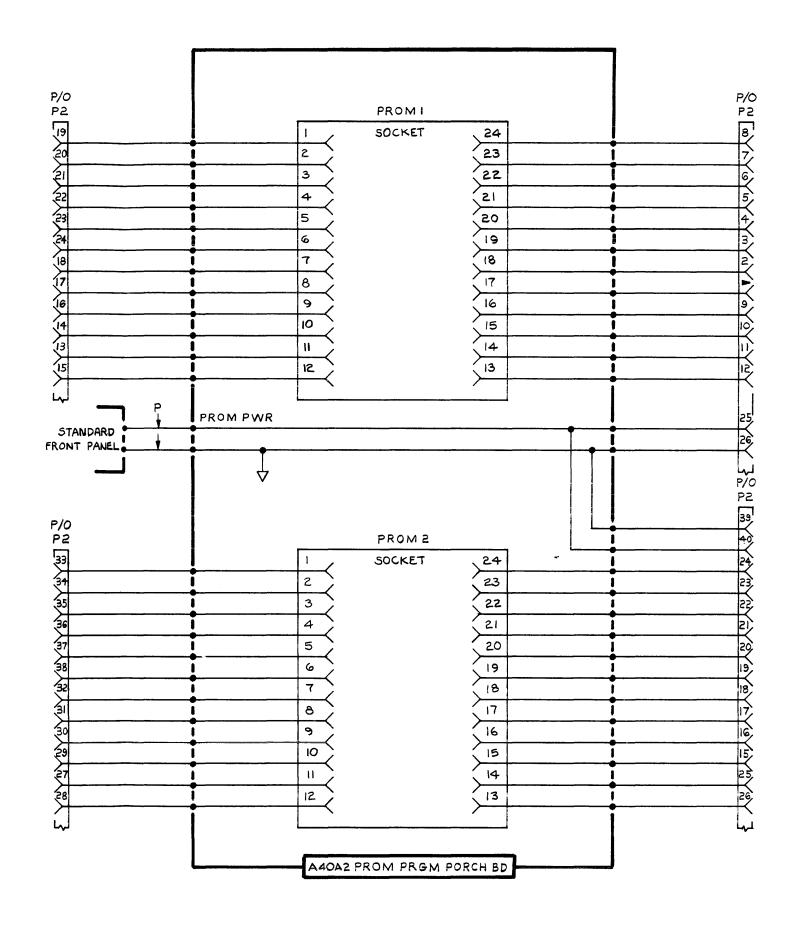


8001/8002A µPROCESSOR LAB SERVICE



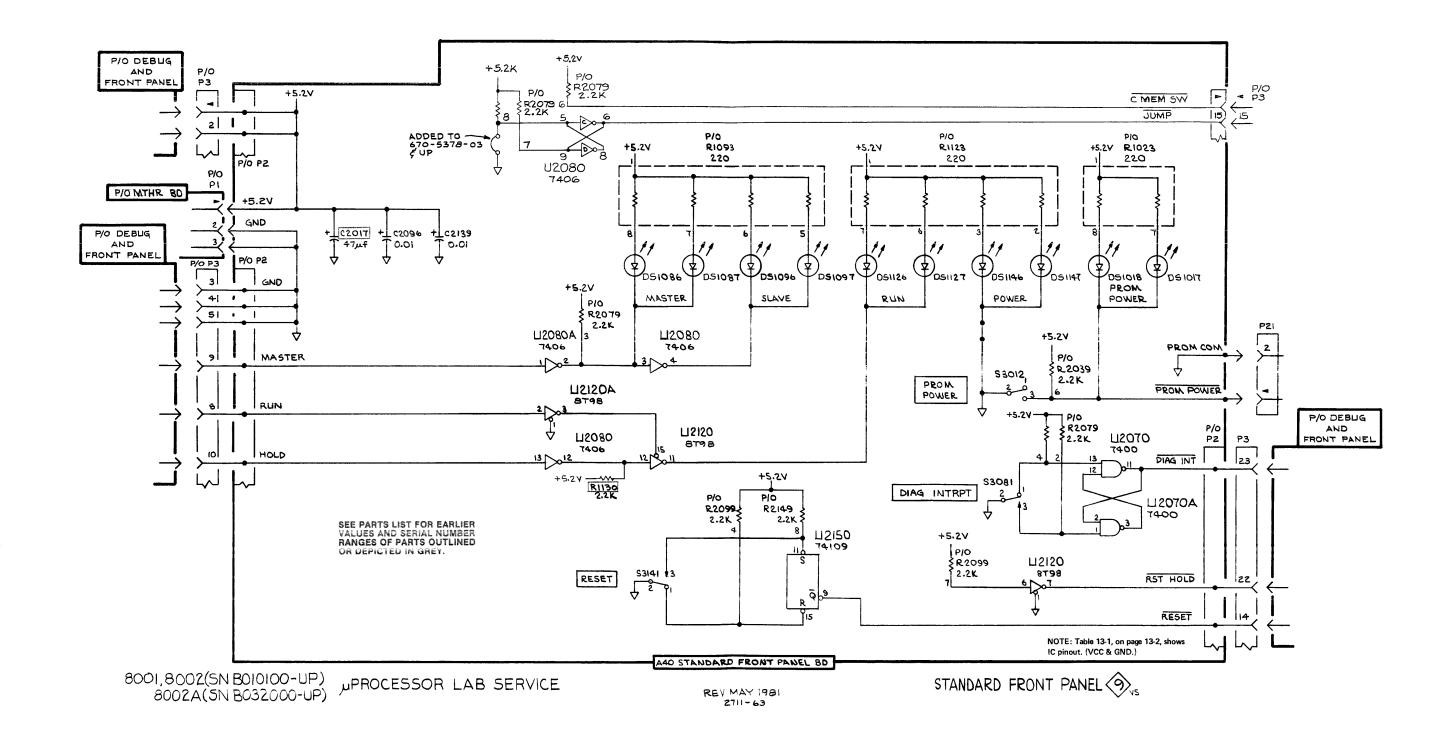

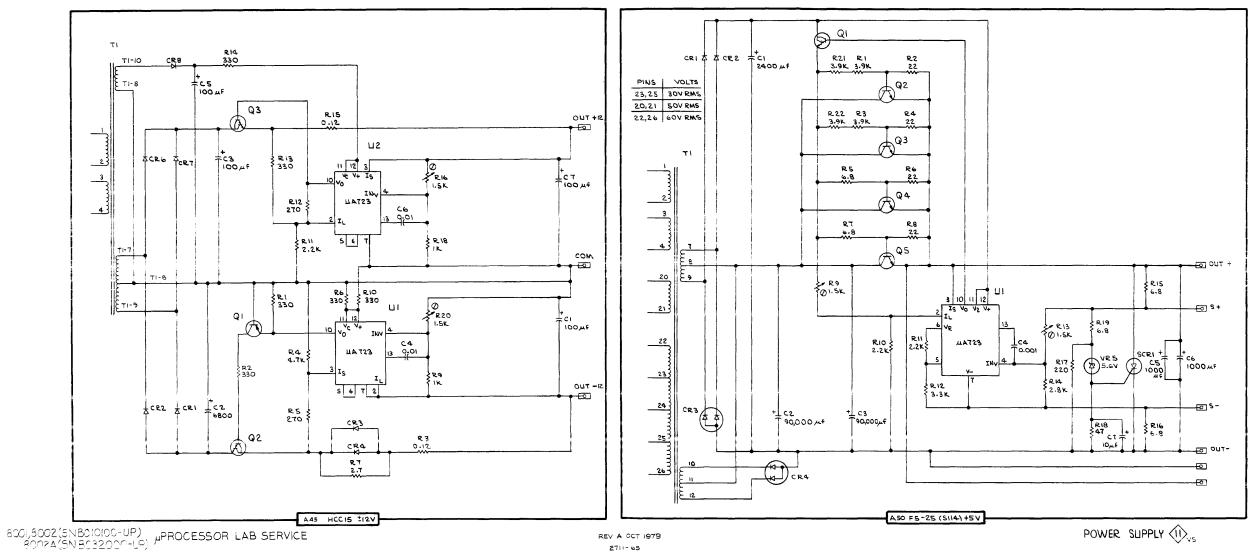

2711-65

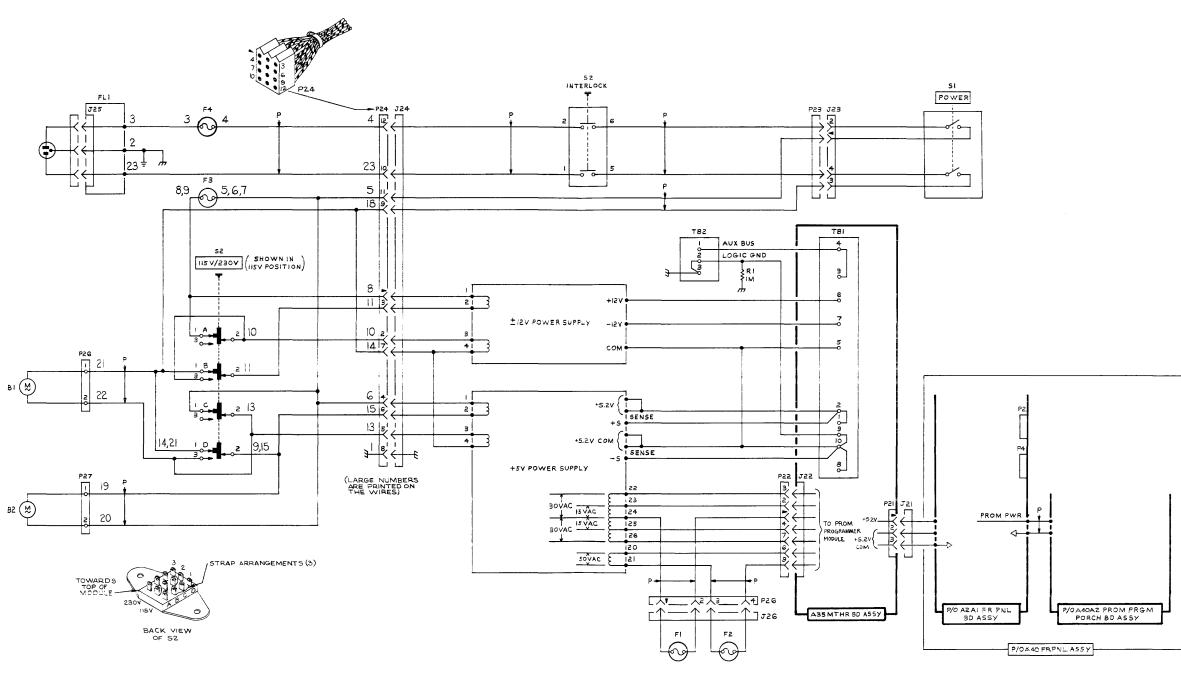

REN A OCT 1979 2711-66 MPROCESSOR LAB WIRING (2)

REPLACEABLE MECHANICAL PARTS

PARTS ORDERING INFORMATION

Replacement parts are available from or through your local Tektronix, Inc. Field Office or representative.

Changes to Tektronix instruments are sometimes made to accommodate improved components as they become available, and to give you the benefit of the latest circuit improvements developed in our engineering department. It is therefore important, when ordering parts, to include the following information in your order: Part number, instrument type or number, serial number, and modification number if applicable.

If a part you have ordered has been replaced with a new or improved part, your local Tektronix, Inc. Field Office or representative will contact you concerning any change in part number.

Change information, if any, is located at the rear of this manual.

SPECIAL NOTES AND SYMBOLS

X000 Part first added at this serial number 00X Part removed after this serial number

FIGURE AND INDEX NUMBERS

Items in this section are referenced by figure and index numbers to the illustrations.

INDENTATION SYSTEM

This mechanical parts list is indented to indicate item relationships. Following is an example of the indentation system used in the description column.

1 2 3 4 5

Name & Description

Assembly and/or Component Attaching parts for Assembly and/or Component

Detail Part of Assembly and/or Component Attaching parts for Detail Part

Parts of Detail Part Attaching parts for Parts of Detail Part

Attaching Parts always appear in the same indentation as the item it mounts, while the detail parts are indented to the right. Indented items are part of, and included with, the next higher indentation. The separation symbol - - - * - - indicates the end of attaching parts.

Attaching parts must be purchased separately, unless otherwise specified.

ITEM NAME

In the Parts List, an Item Name is separated from the description by a colon (:). Because of space limitations, an Item Name may sometimes appear as incomplete. For further Item Name identification, the U.S. Federal Cataloging Handbook H6-1 can be utilized where possible.

ABBREVIATIONS

| 11 | INCH | ELCTRN | ELECTRON | IN | INCH | SE | SINGLE END |
|--------------|--------------------|---------|-----------------------|----------|----------------------|----------|-----------------|
| | NUMBER SIZE | ELEC | ELECTRICAL | INCAND | INCANDESCENT - | SECT | SECTION |
| ACTR | ACTUATOR | ELCTLT | ELECTROLYTIC | INSUL | INSULATOR | SEMICOND | SEMICONDUCTOR |
| ADPTR | ADAPTER | ELEM | ELEMENT | INTL | INTERNAL | SHLD | SHIELD |
| ALIGN | ALIGNMENT | EPL | ELECTRICAL PARTS LIST | LPHLDR | LAMPHOLDER | SHLDR | SHOULDERED |
| AL | ALUMINUM | EQPT | EQUIPMENT | MACH | MACHINE | SKT | SOCKET |
| ASSEM | ASSEMBLED | EXT | EXTERNAL | MECH | MECHANICAL | SL | SLIDE |
| ASSY | ASSEMBLY | FIL | FILLISTER HEAD | MTG | MOUNTING | SLFLKG | SELF-LOCKING |
| ATTEN | ATTENUATOR | FLEX | FLEXIBLE | NIP | NIPPLE | SLVG | SLEEVING |
| AWG | AMERICAN WIRE GAGE | FLH | FLAT HEAD | NON WIRE | NOT WIRE WOUND | SPR | SPRING |
| BD | BOARD | FLTR | FILTER | OBD | ORDER BY DESCRIPTION | SQ | SQUARE |
| BRKT | BRACKET | FR | FRAME or FRONT | OD | OUTSIDE DIAMETER | SST | STAINLESS STEEL |
| BRS | BRASS | FSTNR | FASTENER | OVH | OVAL HEAD | STL | STEEL |
| BRZ | BRONZE | FT | FOOT | PH BRZ | PHOSPHOR BRONZE | SW | SWITCH |
| BSHG | BUSHING | FXD | FIXED | PL | PLAIN or PLATE | Т | TUBE |
| CAB | CABINET | GSKT | GASKET | PLSTC | PLASTIC | TERM | TERMINAL |
| CAP | CAPACITOR | HDL | HANDLE | PN | PART NUMBER | THD | THREAD |
| CER | CERAMIC | HEX | HEXAGON | PNH | PAN HEAD | THK | THICK |
| CHAS | CHASSIS | HEX HD | HEXAGONAL HEAD | PWR | POWER | TNSN | TENSION |
| CKT | CIRCUIT | HEX SOC | HEXAGONAL SOCKET | RCPT | RECEPTACLE | TPG | TAPPING |
| COMP | COMPOSITION | HLCPS | HELICAL COMPRESSION | RES | RESISTOR | TRH | TRUSS HEAD |
| CONN | CONNECTOR | HLEXT | HELICAL EXTENSION | RGD | RIGID | V | VOLTAGE |
| cov | COVER | HV | HIGH VOLTAGE | RLF | RELIEF | VAR | VARIABLE |
| CPLG | COUPLING | IC | INTEGRATED CIRCUIT | RTNR | RETAINER | W/ | WITH |
| CRT | CATHODE RAY TUBE | ID | INSIDE DIAMETER | SCH | SOCKET HEAD | WSHR | WASHER |
| DEG | DEGREE | IDENT | IDENTIFICATION | SCOPE | OSCILLOSCOPE | XFMR | TRANSFORMER |
| DWR | DRAWER | IMPLR | IMPELLER | SCR | SCREW | XSTR | TRANSISTOR |

CROSS INDEX—MFR. CODE NUMBER TO MANUFACTURER

| Mfr. Code | Manufacturer | Address | City, State, Zip |
|-----------|--|-------------------------|--------------------------|
| 000CR | MILLENNIUM INFORMATION SYSTEMS, INC. | 19020 PRUNERIDGE AVENUE | CUPERTINO, CA 95014 |
| 00779 | AMP, INC. | P O BOX 3608 | HARRISBURG, PA 17105 |
| 01963 | CHERRY ELECTRICAL PRODUCTS CORPORATION | 3600 SUNSET AVENUE | WAUKEGAN, IL 60085 |
| 02777 | HOPKINS ENGINEERING COMPANY | 12900 FOOTHILL BLVD. | SAN FERNANDO, CA 91342 |
| 04009 | ARROW-HART, INC. | 103 HAWTHORNE STREET | HARTFORD, CT 06106 |
| 05574 | VIKING INDUSTRIES, INC. | 21001 NORDHOFF STREET | CHATSWORTH, CA 91311 |
| 12327 | FREEWAY CORPORATION | 9301 ALLEN DRIVE | CLEVELAND, OH 44125 |
| 19613 | TEXTOOL PRODUCTS, INC. | 1410 W PIONEER DRIVE | IRVING, TX 75061 |
| 22526 | BERG ELECTRONICS, INC. | YOUK EXPRESSWAY | NEW CUMBERLAND, PA 17070 |
| 27264 | MOLEX PRODUCTS CO. | 5224 KATRINE AVE. | DOWNERS GROVE, IL 60515 |
| 31514 | STANFORD APPLIED ENGINEERING, INC. | | |
| | ADVANCED PACKAGING DIV. | 3080 AIRWAY DRIVE | COSTA MESA, CA 92626 |
| 71279 | CAMBRIDGE THERMIONIC CORP. | 445 CONCORD AVE. | CAMBRIDGE, MA 02138 |
| 73743 | FISCHER SPECIAL MFG. CO. | 446 MORGAN ST. | CINCINNATI, OH 45206 |
| 73803 | TEXAS INSTRUMENTS, INC., METALLURGICAL | | |
| | MATERIALS DIV. | 34 FOREST STREET | ATTLEBORO, MA 02703 |
| 76381 | MINNESOTA MINING AND MFG. CO. | 3M CENTER | ST. PAUL, MN 55101 |
| 77969 | RUBBERCRAFT CORP. OF CALIF., LTD. | 1800 W. 220TH ST. | TORRANCE, CA 90507 |
| 78189 | ILLINOIS TOOL WORKS, INC. | | |
| | SHAKEPROOF DIVISION | ST. CHARLES ROAD | ELGIN, IL 60120 |
| 80009 | TEKTRONIX, INC. | P O BOX 500 | BEAVERTON, OR 97077 |
| 82389 | SWITCHCRAFT, INC. | 5555 N. ELSTON AVE. | CHICAGO, IL 60630 |
| 83385 | CENTRAL SCREW CO. | 2530 CRESCENT DR. | BROADVIEW, IL 60153 |

REV B, JUN 1980

| r. 0 | | | | | | | • |
|------------------------|--------------------------|-----------------|--------|--------------------------------------|---|----------------|----------------------------|
| Fig. & Index No. | Tektronix Part No. | Serial/Mode | Qtv | 1 2 3 4 5 | Name & Description | Mfr Code | Mfr Part Number |
| | | | | | | | |
| 1 -1 | 390-0583-0 | 0 | 1 | CAB. TOP, CONT: | (LEEDLONGING DADES) | 80009 | 390-0583-00 |
| -2 | 212-0137-0 | 0 | 6 | | (ATTACHING PARTS) 8-32 X 0.375 L,PNH,STEEL | 83385 | OBD |
| -3 -4 | 334-1555-0 426-0928-0 | | 4 4 | PLATE, IDENT: TR FRAME, TRIM: GRA | ADEMARK | 80009 80009 | |
| - 5 | 213-0088-0 | 0 | 4 | | G:4-24 X 0.25 INCH, PNH STL | 83385 | OBD |
| -6 | 426-1444-0 | 0 | 2 | FRAME SECT, CAB | .:UPPER (ATTACHING PARTS) | 80009 | 426-1444-00 |
| -7 | 210-0457-0 | 0 | 8 | | A:6-32 X 0.312 INCH, STL | 83385 | OBD |
| -8 | 390-0582-0 | 0 | 1 | CABINET BOTTOM | | 80009 | 390-0582-00 |
| -9 | 212-0008-0 | 0 | 4 | | 8-32 X 0.500 INCH, PNH STL | 83385 | OBD |
| -10 | 348-0128-0 | 1 | 4 | | OLYURETHANE, BLACK | 80009 | 348-0128-01 |
| -11 | 212-0008-0 | 0 | 8 | | 8-32 X 0.500 INCH, PNH STL | 83385 | OBD |
| -12 -13 | 361-0871-0 426-1445-0 | | 2 2 | FRAME SECT, CAB | | 80009 80009 | 361-0871-00 426-1445-00 |
| -14 | 210-0457-0 | 0 | 8 | | (ATTACHING PARTS) A:6-32 X 0.312 INCH,STL | 83385 | OBD |
| -15 | 386-3792-0 | 0 | 2 | STIF, FRONT PNL | | 000CR | 14990041 |
| -16 | 210-0586-0 | 0 | 10 | | A:4-40 X 0.25,STL CD PL | 83385 | OBD |
| -17 -18 | 260-1842-0 | | 1 | CKT BOARD ASSY | DPST,16A,250VAC :LOWER FRONT PNL(SEE A40 RE (ATTACHING PARTS) | | 2600-11E 718 |
| -19 | 211-0661-0 | 0 | 6 | | 4-40 X 0.25 INCH, PNH, STL | 83385 | OBD |
| | | _ | _ | . CKT BOARD AS: | SY INCLUDES: | | |
| | | | 1 | . CA ASSY, SP, E. (8001 ONLY) | LEC:26,28 AWG,18.0 L | 80009 | 175-2115-00 |
| | 175-2115-0 | | 1_ | . CA ASSY,SP,E. (8002A ONLY) | LEC:26,28 AWG,18.0 L | 80009 | 175-2115-00 |
| | 179-2658-0 | 0 XB050374 | 1_ | . WIRING HARNES | SS:DC | 80009 | 179-2658-00 |
| | 179-2658-0 | | 1_ | . WIRING HARNES | SS:DC | 80009 | 179-2658-00 |
| | 179-2662-0 | | 1 | | SS:PRIMARY AC | 80009 | 179-2662-00 |
| | 179-2662-0 | | 1 | . WIRING HARNES | SS:PRIMARY AC | 80009 | 179-2662-00 |
| | 334-3221-0 | 0 XB050374 - | 1 | . MARKER, IDENT . (8001 ONLY) | MARKED LOWER FRONT PANEL | 80009 | 334-3221-00 |
| | 334-3221-0 | 0 XB073307 | 1 | . MARKER, IDENT . (8002A ONLY) | MARKED LOWER FRONT PANEL | 80009 | 334-3221-00 |
| -20 | 129-0737-0 | 0 | 6 | SPACER, POST: 0. | 75 L,4-40 THD THRU,AL | 80009 | 129-0737-00 |
| -21 | 214-2682-0 | | 1 | IND, DIFFUSER: 9 | .75 L X 1.25W,PLASTIC | 80009 | |
| -22 | 331-0437-0 | - | | MASK, LED: CONTRO | | 80009 | |
| -23 | 407-2013-0 | | 1 | | (ATTACHING PARTS) | 80009 | 407-2013-00 |
| -24 | 210-0457-0 | U | 4 | NUT, PL, ASSEM WA | A:6-32 X 0.312 INCH, STL | 83385 | OBD |
| -25 | | - | 1 | | PROM SOCKET(SEE A40A2 REPL | .) | |
| -26 | 210-0586-0 | | | NUT, PL, ASSEM WA | A:4-40 X 0.25,STL CD PL | 83385 | OBD |
| -27 -29 | 210-1063-0 | | | | 47 ID X 0.1 THK,ABS,0.29 0 | | |
| -28 | 361-0950-0 | U | 4 | SPACER, SLEEVE: | 0.25 L X 0.129 ID, PLASTIC | 80009 | 361-0950-00 |

REV, JUN 1981 14-3

| Fig. & Index No. | Tektronix Part No. | | del No. Dscont | Qty | 1 2 3 4 5 | Name & Description | Mfr Code | Mfr Part Number |
|------------------------|-----------------------|-----|-------------------|--------|-----------------------|---|-------------|------------------|
| | | | | | | | | |
| 1-29 | | | | _ | . CKT BOARD ASS | | 10(12 | 00/ 0221 00 0602 |
| | 136-0536-0 | | | 2 | | N:24 PIN,W/LOCKING LEVER | 19613 | |
| -30 | 333-2340-0 | | | | PANEL, FRONT: | | 80009 | 333-2340-00 |
| -31 | 200-2119-0 | | | 1 | | | 80009 | 200-2119-00 |
| | 334-3137-0 | | | | MARKER, IDENT: MA | RKED 8002A | 80009 | 334-3137-01 |
| -32 | 333-2344-0 | 0 | | 1 | PANEL, FRONT: | | 80009 | 333-2344-00 |
| -33 | 212-0137-0 | 0 | | 4 | | ATTACHING PARTS) | 02205 | ORD |
| -33 | 212-0137-0 | U | | 4 | SCREW MACHINE: | -32 X 0.375 L,PNH,STEEL | 83385 | OBD |
| -34 | 214-2685-0 | 0 | | 1 | KEY, CIRCUIT BD: | | 80009 | 214-2685-00 |
| -35 | 211-0510-0 | 0 | | 2 | | ATTACHING PARTS) -32 X 0.375,PNH,STL,CD PL | 83385 | OPD |
| 33 | 211 0310 0 | • | | 2 | BOKEW, PROHINE. | * | 03303 | ODD |
| -36 | 260-1497-0 | 0 | | 1 | SWITCH, PUSH: DPD | T,10A,250VAC | 01963 | E79-30A |
| -37 | 407-2024-0 | 0 | | 1 | BRACKET, ANGLE: I | | 80009 | 407-2024-00 |
| -38 | 210-0457-0 | 0 | | 2 | | :6-32 X 0.312 INCH, STL | 83385 | OBD |
| -39 | 211-0510-0 | | | 2 | | | | OBD |
| -39 | 211-0510-0 | U | | 2 | SCREW, MACHINE: 0 | -32 X 0.375,PNH,STL,CD PL | 83385 | עפט |
| -40 | 200-2156-0 | 0 | | 1 | COVER, PWR SPLY: | 5V ATTACHING PARTS) | 80009 | 200-2156-00 |
| -41 | 211-0510-0 | 0 | | 2 | | -32 X 0.375,PNH,STL,CD PL | 83385 | OBD |
| -42 | 211-0511-0 | | | 2 | | -32 X 0.500,PNH,STL,CD PL | 83385 | |
| | 343-0709-0 | 0 | | 1 | CLAMB CARLE / 2 | * | 90000 | 2/2 0700 00 |
| -43 | 343-0722-0 | | | 1 5 | CLAMP, CABLE: 4.3 | | 80009 | 343-0709-00 |
| | | | | | (. | 25 L,ALUMINUM,W/BUSHINGS ATTACHING PARTS) | 80009 | 343-0722-01 |
| -44 | 210-0949-0 | | | 14 | | 41 ID X 0.50 INCH OD, BRS | 12327 | |
| -45 | 210-0409-0 | 0 | | 4 | NUT, PLAIN, HEX.: | 8-32 X 0.312 INCH, BRS | 73743 | 3046-402 |
| -46 | 200-2157-0 | 0 | | 1 | COVER, PWR SPLY: | | 80009 | 200-2157-00 |
| 40 | 200 2137 0 | O | | 1 | | ATTACHING PARTS) | 80009 | 200-2157-00 |
| -47 | 211-0511-0 | 0 | | 3 | | -32 X 0.500,PNH,STL,CD PL | 83385 | OBD |
| -48 | 211-0510-0 | | | 3 | | -32 X 0.375,PNH,STL,CD PL | 83385 | |
| | 03.0 0 | • | | , | DONE H, I LIGHT HE LO | * | 03303 | ODD |
| -49 | 260-0987-0 | 0 | | 1 | SWITCH, SLIDE: 4P | DT,0.5A,125VAC | 82389 | 47227LF |
| -50 | 211-0012-0 | 0 | | 2 | | ATTACHING PARTS) -40 X 0.375,PNH STL CD PL | 83385 | OBD |
| | | | | | , | * | | |
| -51 | 119-0420-0 | 0 | | 1 | FILTER, RFI: 6A, 2 | 50VAC,400HZ ATTACHING PARTS) | 02777 | F-11935-6 |
| -52 | 210-0586-0 | Λ | | 2 | | :4-40 X 0.25,STL CD PL | 83385 | OBD |
| -53 | 211-0012-0 | | | 2 | | -40 X 0.375,PNH STL CD PL | 83385 | |
| ,,, | 211 0012 0 | O | | 2 | JOREW, PERCHINE.4 | * | 65363 | עפט |
| -54 | 118-0405-0 | 0 | | 4 | FUSEHOLDER: | | 20002 | 118-0405-00 |
| -55 | 210-0457-0 | | | | | :6-32 X 0.312 INCH,STL | 83385 | |
| -56 | 211-0513-0 | | | | | -32 X 0.625 INCH, PNH STL | 83385 | |
| -57 | 333-2357-0 | | | 1 | • | 32 A 0.023 INCH, FMH 315 | 80009 | 333-2357-00 |
| ,,, | 333-2337-0 | O . | | 1 | , | ATTACHING PARTS) | 80009 | 333-2377-00 |
| -58 | 210-0586-0 | 0 | | 4 | | :4-40 X 0.25,STL CD PL | 83385 | OBD |
| -59 | 386-3808-0 | 0 | | 1 | PL, REAR PNL MTG | * | 80009 | 386-3808-00 |
| | 333 3000 0 | • | | • | | ATTACHING PARTS) | 00007 | 300 3000 00 |
| -60 | 211-0012-0 | 0 | | 4 | SCREW, MACHINE: 4 | -40 X 0.375,PNH STL CD PL | 83385 | OBD |
| -61 | 200-2222-0 | 0 | | 2 | GUARD, FAN: | * | 81041 | 6-182-033 |
| | -40 2222 0 | • | | - | - | ATTACHING PARTS) | 01041 | 0 102 033 |
| -62 | 210-0457-0 | 0 | | 8 | NUT, PL, ASSEM WA | :6-32 X 0.312 INCH,STL | 83385 | OBD |
| -63 | 211-0513-0 | 0 | | 8 | | -32 X 0.625 INCH, PNH STL | 83385 | |
| -64 | | _ | | 2 | EAN DENTILATIO | * | | |
| -65 | | | | | | (SEE Bl AND B2 REPL) | 77040 | 1252 |
| -66 | 252-0571-0 | | | 2 | | HAN,0.234 X 0.156 | 77969 | |
| .00 | 333-2342-0 | U | | 1 | PANEL, REAR: | ATTACUING DADTE | 80009 | 333-2342-00 |
| -67 | 212-0137-0 | 0 | | 4 | | ATTACHING PARTS) -32 X 0.375 L,PNH,STEEL * | 83385 | OBD |
| | | | | | | | | |

14-4 REV, JUN 1981

| Fig. & Index No. | Tektronix Part No. | Serial/Model No. Eff Dscont | Qty | 1 2 3 4 5 | Name & Description | Mfr Code | Mfr Part Number |
|---|---|--------------------------------|---|--|--|---|--|
| 1 -68 | 118-0204-0 | 00 | 1 - | POWER SPLY AS HCC15-3 | SSY: CPU | 000CR | 90019061 |
| 118-0439-00 343-0149-00 407-2010-00 407-2012-00 210-0458-00 211-0578-00 212-0023-00 212-0043-00 220-0410-00 | | | 1 2 1 1 2 6 2 2 4 | . CLAMP,LOOP . BRACKET,ANG . BRACKET,ANG . NUT,PL,ASSI . SCREW,MACH . SCREW,MACH | UPPLY:ALUMINUM :NYLON GLE:POWER SUPPLY,ALUMINUM GLE:POWER SUPPLY,ALUMINUM EM WA:8-32 X 0.344 INCH,STL INE:6-32 X 0.438 INCH,PNH STL INE:8-32 X 0.375 INCH,PNH STL INE:8-32 X 0.500 INCH,FLH STL ED WA:10-32 X 0.375 INCH,STL | 80009 80009 80009 83385 83385 83385 83385 | 343-0149-00 407-2010-00 407-2012-00 OBD OBD OBD OBD OBD |
| | 118-0440-00 255-0689-00 343-0149-00 343-0775-00 384-0647-00 386-0978-00 407-2024-00 214-2952-00 118-0508-00 210-0457-00 211-0559-00 211-0578-00 220-0410-00 | | 1 FT 1 1 2 8 1 4 2 14 4 18 | . CHAS, PWR SU PLASTIC CHA CLAMP, LOOP CLIP, SPR TI POST, ELEC- INSULATOR, I BRACKET, ANG HEAT SINK, I RETAINER, CA NUT, PL, ASSI SCREW, MACHI | NSN: MECH:0.312 X 1.344 INCH LONG,AL PLATE:TRANSISTOR,MICA GLE:INTERLOCK SWITCH ELEC:POWER SUPPLY | 80009 76381 80009 80009 80009 83385 83385 83385 83385 | 343-0149-00 3484-1000 384-0647-00 386-0978-00 407-2024-00 OBD OBD OBD |


REV, JUN 1981 14-5


| Fig. & Index No. | | erial/Model No. ff Dscont | Qty | 1 2 3 4 5 | Name & Description | Mfr Code | Mfr Part Number |
|------------------------|-------------|------------------------------|--------|---------------------------------------|--|-------------|---|
| 2-1 | | | | OVER BOARD AGGY. O | NAMES (COLOR AND AND DEPT.) | | |
| -2 | 136-0578-00 | | 1 3 | | YSTEM COMM(SEE A30 REPL) ::MICROCKT,24 PIN,LOW PROFILE | 73803 | C S9002-24 |
| - 3 | 131-0993-00 | | 7 | . BUS, CONDUCTOR: | | 00779 | |
| -4 | | воз2000 воб2396 | 6 | - | | | 47357 |
| -4 | 131-0608-00 | возгоот вооглус | 52 | | .365 L X 0.025 PH BRZ GOLD | 22526 | t contract to the contract to |
| -5 | 214-1337-00 | DU02377 | 2 | | .365 L X 0.025 PH BRZ GOLD O OD X 0.25 INCH L,STL | 80009 | |
| -6 | 105-0792-00 | | 2 | . EJECTOR, CKT BD | • | 80009 | 214-1337-00 105-0792-00 |
| -7 | | | 1 | · · · | 6K DYN RAM SYS(SEE A20A1 REPL) | 00003 | 107-0792-00 |
| -8 | 118-0317-00 | | 11 | . TERMINAL, PIN: | OR DIN RAM SIS(SEE AZOAT REFL) | 80009 | 118-0317-00 |
| -9 | 136-0578-00 | | 1 | - | :MICROCKT,24 PIN,LOW PROFILE | 73803 | C S9002-24 |
| -10 | 214-1337-00 | | 2 | | 0 OD X 0.25 INCH L,STL | 80009 | 214-1337-00 |
| -11 | 105-0792-00 | | 2 | . EJECTOR, CKT BD | · · | 80009 | 105-0792-00 |
| -12 | | | 1 | • | YSTEM PROCESSOR(SEE A1 REPL) | 00007 | 103 0772 00 |
| -13 | 136-0623-00 | | 1 | | :40 DIP,LOW PROFILE | 73803 | CS9002-40 |
| -14 | 118-0317-00 | | 6 | . TERMINAL, PIN: | .40 DII , BOW I ROI I III | 80009 | 118-0317-00 |
| -15 | 214-1337-00 | | 2 | | 0 OD X 0.25 INCH L,STL | 80009 | 214-1337-00 |
| -16 | 105-0792-00 | | 2 | . EJECTOR, CKT BD | | 80009 | 105-0792-00 |
| -17 | | | 1 | | G AND FR PNL I/O(SEE A5 REPL) | | 103 0.72 00 |
| -18 | 118-0317-00 | | 6 | . TERMINAL, PIN: | | 80009 | 118-0317-00 |
| -19 | 214-1337-00 | | 2 | | O OD X 0.25 INCH L,STL | 80009 | 214-1337-00 |
| -20 | 105-0792-00 | | 2 | . EJECTOR, CKT BD | | 80009 | 105-0792-00 |
| -21 | | | 1 | | MBLER PROCESSOR(SEE A10 REPL) | | |
| -22 | 136-0623-00 | | 1 | | :40 DIP,LOW PROFILE | 73803 | CS9002-40 |
| -23 | 131-1425-00 | | 13 | | E:R ANGLE,0.150" L,STR OF 36 | 22526 | |
| -24 | 214-1337-00 | | 2 | | O OD X 0.25 INCH L,STL | 80009 | 214-1337-00 |
| -25 | 105-0792-00 | | 2 | . EJECTOR, CKT BD | :PLASTIC | 80009 | 105-0792-00 |
| -26 | | | 1 | | EM MEM(SEE A20A2 REPL) | | |
| -27 | 118-0317-00 | | 11 | . TERMINAL, PIN: | | 80009 | 118-0317-00 |
| -28 | 136-0578-00 | | 1 | . SKT, PL-IN ELEK | :MICROCKT, 24 PIN, LOW PROFILE | 73803 | C S9002-24 |
| -29 | 214-1337-00 | | 2 | . PIN, SPRING: 0.1 | 0 OD X 0.25 INCH L,STL | 80009 | 214-1337-00 |
| -30 | 105-0792-00 | | 2 | . EJECTOR, CKT BD | :PLASTIC | 80009 | 105-0792-00 |
| -31 | | | 1 | CKT BOARD ASSY:M | OTHER(SEE A35 REPL) | | |
| | | | | (A | TTACHING PARTS) | | |
| -32 | 211-0510-00 | | 10 | | 32 X 0.375,PNH,STL,CD PL | 83385 | OBD |
| | | | - | . CKT BOARD ASSY | INCLUDES: | | |
| | 131-1693-00 | | 9 | | :CONN, MALE, BRSTIN PL | 27264 | 02-09-2133 |
| | 131-1694-00 | | 3 | | :CONN, FEMALE, BRS TIN PL | 27264 | 02-09-1133 |
| | 204-0839-00 | | 1 | | UG:3 CONT, WO/MTGEARS OR TABS | 27264 | 03-09-1033 |
| | 204-0838-00 | | 1 | | UG:9 CONT, W/MTG EARS | 27264 | 03-09-2092 |
| | 124-0365-00 | | 1 | | RD:10 CONTACT PLASTIC | 80009 | 124-0365-00 |
| -33 | 131-2240-00 | | 20 | | :CKT BD,50/100CONT | 05574 | 000201-5256 |
| -34 | 351-0575-00 | | | GUIDE, CKT BD: PLA | | 80009 | 351-0575-00 |
| -35 | 381-0401-00 | | 3 | | TTACHING PARTS) | 80009 | 381-0401-00 |
| -36 | 211-0511-00 | | | | 32 X 0.500,PNH,STL,CD PL | 83385 | · |
| -37 | 211-0504-00 | | 6 | • | 32 X 0.25 INCH, PNH STL | 83385 | OBD |
| -38 | 343-0776-00 | | 60 | RETAINER, GUIDE: PI | LASTIC | 31514 | 3000 |
| -39 | 381-0401-00 | | 1 | BAR, CKT BD GUID: | ALUMINUM TTACHING PARTS) | 80009 | 381-0401-00 |
| -40 | 211-0511-00 | | 2 | | 32 X 0.500,PNH,STL,CD PL | 83385 | OBD |
| -41 | 211-0513-00 | | 2 | | 32 X 0.625 INCH, PNH STL | 83385 | OBD |
| -42 | 211-0504-00 | | 2 | SCREW, MACHINE: 6- | 32 X 0.25 INCH, PNH STL | 83385 | OBD |
| -43 | 343-0776-00 | | 20 | RETAINER, GUIDE: P | | 31514 | 3000 |
| -44 | 361-0945-00 | | 2 | • | .25 SQ,0.1562 THK,AL | 80009 | 361-0945-00 |
| -45 | 343-0775-00 | | 13 | CLIP, SPR TNSN: | () | 76381 | 3484-1000 |
| -46 | 386-3794-00 | | 1 | PLATE, CONT: LEFT | | 80009 | 386-3794-00 |
| | | | | · · · · · · · · · · · · · · · · · · · | TTACHING PARTS) | | • • |
| -47 | 211-0510-00 | | 2 | | 32 X 0.375, PNH, STL, CD PL | 83385 | OBD |
| -48 | 212-0023-00 | | 4 | | 32 X 0.375 INCH, PNH STL | 83385 | |
| | | | | • | * | | |

REV, JUN 1981 14-7


Replaceable Mechanical Parts—8001/8002A Service

| Fig. & Index No. | Tektronix Part No. | Serial/I Eff | Model No. Dscont | Qty | 1 2 3 4 5 | Name & Description | Mfr Code | Mfr Part Number |
|------------------------|-----------------------|-----------------|---------------------|-----|-----------------|-----------------------------|-------------|-----------------|
| 2-49 | 386-3795-0 | 00 | | 1 | PLATE, CONT: RI | ЭНТ | 80009 | 386-3795-00 |
| | | | | | ŕ | (ATTACHING PARTS) | | |
| -50 | 211-0510-0 | 00 | | 2 | SCREW, MACHINE | :6-32 X 0.375,PNH,STL,CD PL | 83385 | OBD |
| -51 | 212-0023-0 | 00 | | 4 | SCREW, MACHINE | :8-32 X 0.375 INCH, PNH STL | 83385 | OBD |
| | | | | | | * | | |
| -52 | 386-3798-0 | 00 | | 1 | STIF, CKT BD C | G: | 80009 | 386-3798-00 |
| -53 | 441-1396-0 | 00 | | 1 | CHAS. CONTROLL | ER:MOTHER BOARD | 80009 | 441-1396-00 |
| -54 | 175-2112-0 |)2 | | 1 | CA ASSY, SP, EL | EC:16,28 AWG,3.OL | 80009 | 175-2112-02 |
| -55 | 175-2116-0 | 00 | | 1 | CA ASSY, SP, EL | EC:26,28 AWG,19.0 L | 80009 | 175-2116-00 |
| | 175-2115-0 | 00 | | 1 | CA ASSY, SP, EL | EC:26,28 AWG,18.0 L | 80009 | 175-2115-00 |
| -56 | 012-0764-0 | 00 | | 1 | CABLE, INTCON: | 22.0 L | 000CR | 90014011 |
| | 012-0764-0 |)1 | | 1 | CABLE, INTCON: | 22.0 L | 000CR | 90014011 |
| | 012-0764-0 |)2 | | 1 | CABLE, INTCON: | 22.0 L | 000CR | 90014011 |
| | 012-0764-0 |)3 | | 1 | CABLE, INTCON: | 22.0 L | 000CR | 90014011 |

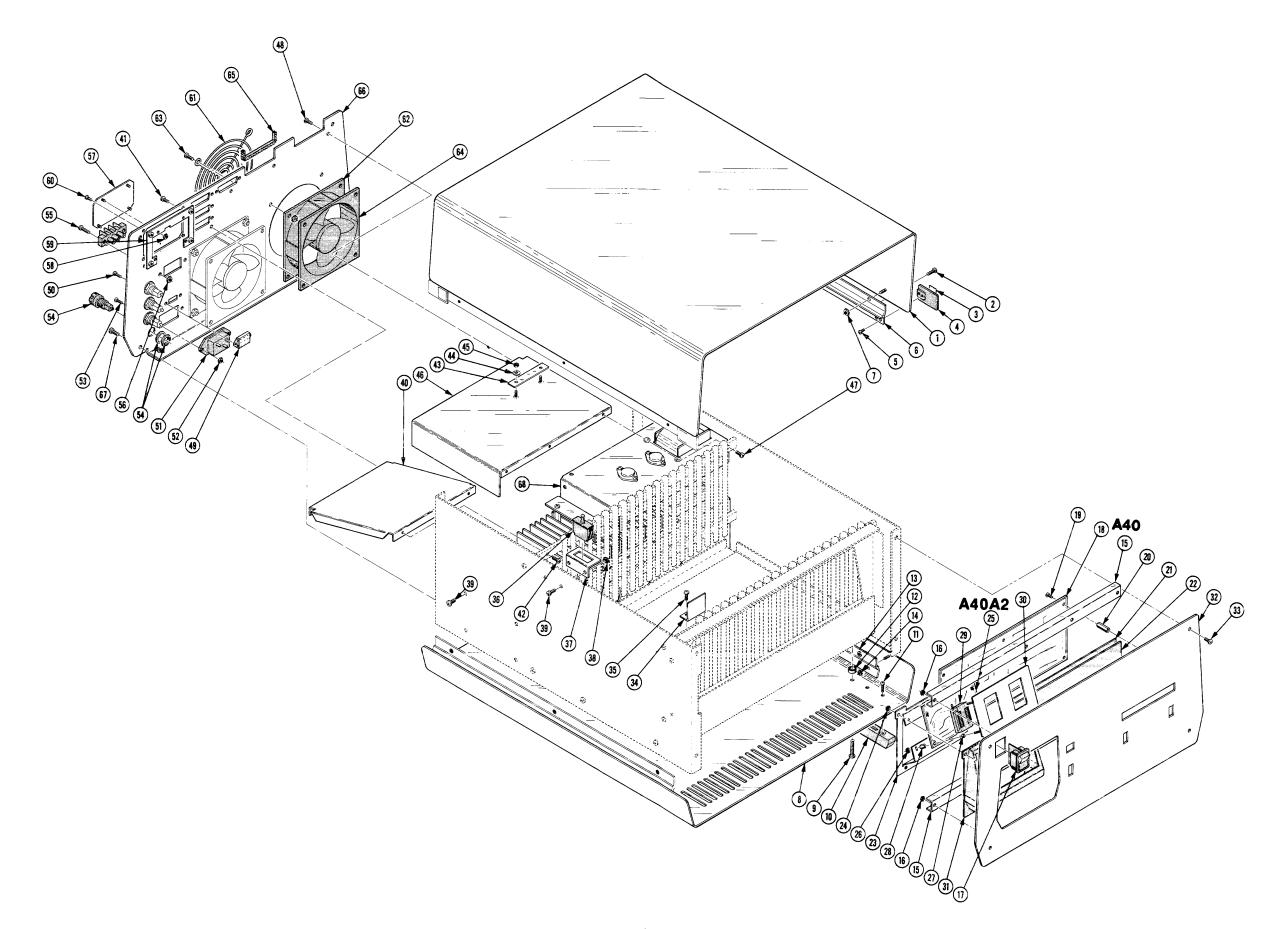

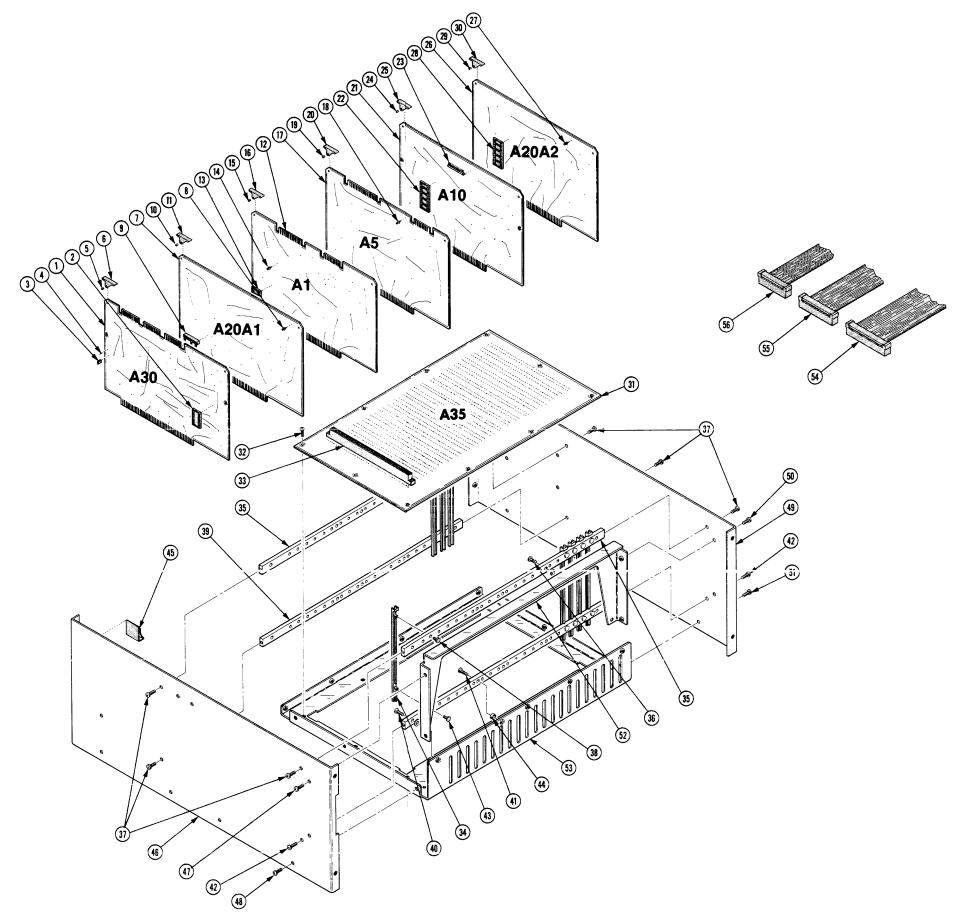


8001/8002A SERVICE

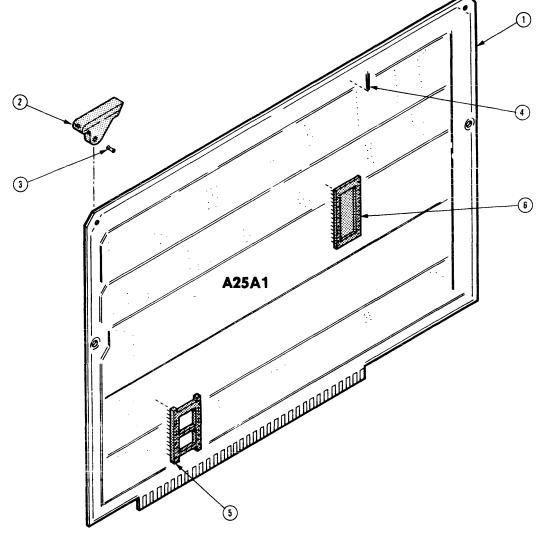

| Fig. & Index No. | Tektronix Part No. | Serial/Mo | odel No. Dscont | Qtv | 12345 | Name & Description | Mfr Code | Mfr Part Number |
|------------------------|-----------------------|------------|--------------------|-----|-------------|--|-------------|-----------------|
| 3-1 | | | | | | SSY:HIGH SP MEM PRGM(SEE A25Al REPL | | |
| 3-1 | | - | | _ | (STANDARD C | | , | |
| | | _ | | | | SSY:HIGH SP MEM PRGM(SEE A25Al REPL |) | |
| | | _ | | | (OPTION 45 | | , | |
| | | _ | | | | BOARD ASSY INCLUDES: | | |
| -2 | 105-0792-0 | 0 | | 2 | | KT BD:PLASTIC | 80009 | 105-0792-00 |
| -3 | 214-1337-0 | 0 | | 2 | . PIN,SPRÍN | G:0.10 OD X 0.25 INCH L,STL | 80009 | 214-1337-00 |
| -4 | 131-1425-0 | 0 в01010 | 0 в045289 | 11 | . CONTACT S | ET, ELE: R ANGLE, 0.150" L, STR OF 36 | 22526 | 65521-136 |
| | | - | | - | . (8001 ONL | | | |
| | 131-1425-0 | | 0 | 13 | | ET, ELE: R ANGLE, 0.150" L, STR OF 36 | 22526 | 65521-136 |
| | | | | - | . (8001 ONL | | | |
| | 131-1425-0 | O B01010 | 0 в045293 | 11 | | ET,ELE:R ANGLE,0.150" L,STR OF 36 | 22526 | 65521-136 |
| | 101 1/05 0 | - | • | - | | ION 45 ONLY) | 00506 | (5501 10/ |
| | 131-1425-0 | | 4 | | | ET,ELE:R ANGLE,O.150" L,STR OF 36 ION 45 ONLY) | 22526 | 65521-136 |
| | 131-1425-0 | | 20/5202 | - | | | 22526 | 65521-136 |
| | 131-1425-0 | | D B045292 | 11 | | ET,ELE:R ANGLE,0.150" L,STR OF 36 ION 49 ONLY) | 22326 | 00021-100 |
| | 131-1425-0 | | 3 | 13 | | ET,ELE:R ANGLE,0.150" L,STR OF 36 | 22526 | 65521-136 |
| | | - DO-4323. | , | - | | ION 49 ONLY) | 22720 | 05521 150 |
| | 131-1425-0 | 0 вололо | 0 в052436 | 11 | | ET,ELE:R ANGLE,0.150" L,STR OF 36 | 22526 | 65521-136 |
| | | | | | . (8002A ON | | | |
| | 131-1425-0 | 0 в05243 | 7 | 13 | | ET,ELE:R ANGLE,0.150" L,STR OF 36 | 22526 | 65521-136 |
| | | _ | | | . (8002A ON | | | |
| | 131-1425-0 | 0 в01010 | 0 в052481 | 11 | . CONTACT S | ET,ELE:R ANGLE,0.150" L,STR OF 36 | 22526 | 65521-136 |
| | | - | | _ | . (8002A/45 | ONLY) | | |
| | 131-1425-0 | 0 в05248 | 2 | 13 | . CONTACT S | ET,ELE:R ANGLE,0.150" L,STR OF 36 | 22526 | 65521-136 |
| | | _ | | - | . (8002A/45 | | | |


| 131-1425-00 B010100 B052438 | 11 . CONTACT SET, ELE: R ANGLE, 0.150" L, STR OF 36 (8002A/49 ONLY) | 22526 | 65521-136 |
|-----------------------------|---|------------|------------------|
| 131-1425-00 в052439 | 13 . CONTACT SET, ELE: R ANGLE, 0.150" L, STR OF 36 | 22526 | 65521-136 |
| 136-0578-00 | (8002A/49 ONLY) 1 . SKT,PL-IN ELEK:MICROCKT,24 PIN,LOW PROFILE | 73803 | C S9002-24 |
| 136-0597-00 | 1 . SOCKET, PLUG-IN: 28 CONTACT | | 703-3783-01-0416 |
| 118-0317-00 XB050300 | 11 . TERMINAL, PIN: | | 118-0317-00 |
| 110 0017 00 | (8001 ONLY) | | |
| 118-0317-00 XB056029 | 11 . TERMINAL, PIN: | 80009 | 118-0317-00 |
| 118-0317-00 XB056025 | (8001 OPTION 45 ONLY) 11 . TERMINAL, PIN: | 80009 | 119 0217 00 |
| | (8001 OPTION 49 ONLY) | 80009 | 118-0317-00 |
| 118-0317-00 XB072742 | 11 . TERMINAL, PIN: | 80009 | 118-0317-00 |
| | (8002A ONLY) | | |
| 118-0317-00 XB065056 | 11 . TERMINAL, PIN: | 80009 | 118-0317-00 |
| 118-0317-00 XB064023 | (8002A/45 ONLY) | | |
| | 11 . TERMINAL, PIN: (8002A/49 ONLY) | 80009 | 118-0317-00 |
| | . (0002A/47 UNLI) | • | _ |
| | | / • | 1 |
| | | | • |
| | | | |

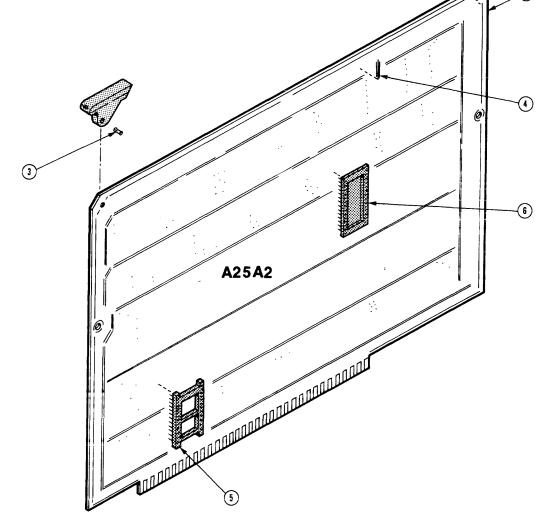


| Fig. & Index No. | Tektronix Part No. | Serial/ Eff | Model No. Dscont | Qty | 1 2 3 4 5 | Name & Description | Mfr Code | Mfr Part Number |
|------------------------|-----------------------|----------------|---------------------|-----|-----------|--|-------------|------------------|
| 3-1 | | | | 1 | CKT BOARD | ASSY:HIGH SPEED MEM(SEE A25A2 REPL) | | |
| -2 | 105-0792-0 | 00 | | 2 | . EJECTOR | CKT BD:PLASTIC | 80009 | 105-0792-00 |
| -3 | 214-1337-0 | 00 | | 2 | . PIN.SPR | ING:0.10 OD X 0.25 INCH L,STL | 80009 | 214-1337-00 |
| -4 | 131-1425-0 | 00 | | 11 | • | SET, ELE: R ANGLE, 0.150" L, STR OF 36 | 22526 | 65521-136 |
| - 5 | 136-0578-0 | 00 | | 1 | | IN ELEK: MICROCKT, 24 PIN, LOW PROFILE | 73803 | C S9002-24 |
| -6 | 136-0597-0 | 00 | | 1 | . SOCKET, | PLUG-IN: 28 CONTACT | 71279 | 703-3783-01-0416 |

REV JUN 1981

-5 -6

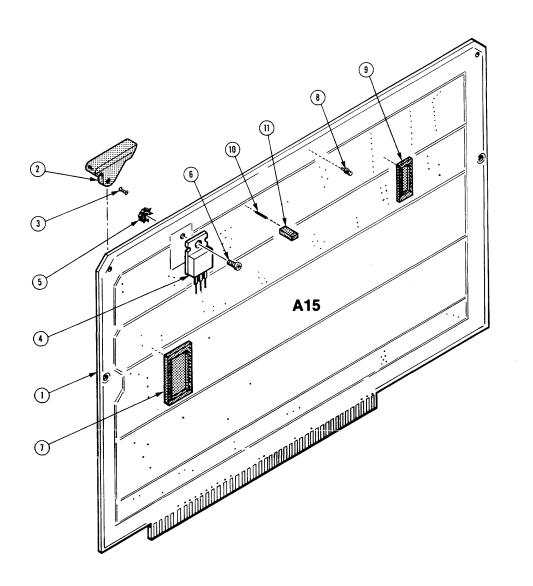

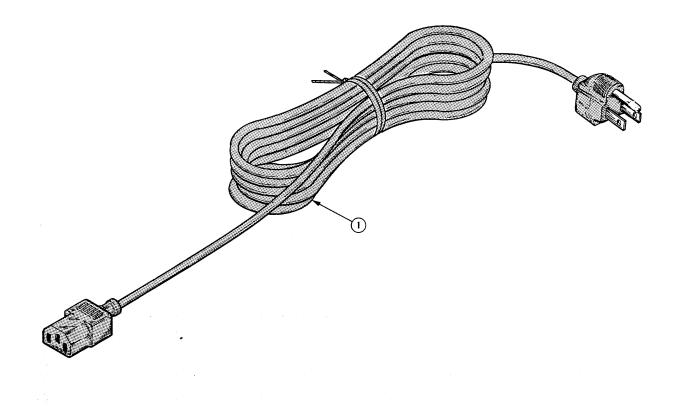

| Fig. & Index No. | Tektronix Serial/Model No. Part No. Eff Dscont | Oty 1 2 3 4 5 Name & Description Code Mfr Part Num | Fig. & Index Tektronix Serial/Model No. er No. Part No. Eff Dscont C | Oty 1 2 3 4 5 Name & Description | Mfr Code Mfr Part Number |
|------------------------|---|--|--|--|-----------------------------|
| 4-1 | | 1 CKT BOARD ASSY:8001 SYSTEM MEMORY(SEE A15 REPL) | | STANDARD ACCESSORIES | |
| -2 | 105-0792-00 | 2 . EJECTOR, CKT BD: PLASTIC 80009 105-0792-00 | | | |
| -3 | 214-1337-00 | 2 . PIN, SPRING: 0.10 OD X 0.25 INCH L, STL 80009 214-1337-00 | 070-2711-00 | 1 MANUAL, TECH: INSTRUCTION | 80009 070-2711-00 |
| -4 | | 1 . MICROCIRCUIT, LI: VOLTAGE RGTR(SEE Q1030 REPL) | 070-2552-00 XB073544 | I CARD, INFO: | 80009 070-2552-00 |
| | | (ATTACHING PARTS) | 016-0367-00 XB073544 | 1 BDR, LOOSE-LEAF: 2.0 CAP RING, VINYL COVER | 80009 016-0367-00 |
| - 5 | 210-0586-00 | 1 . NUT, PL, ASSEM WA: 4-40 X 0.25, STL CD PL 83385 OBD | 016-0370-00 XB073544 | 1 DIV,LOOSE LEAF:1 FLEX DISC PKT | 80009 016-0370-00 |
| 6 | 211-0008-00 | 1 . SCREW, MACHINE: 4-40 X 0.25 INCH, PNH STL 83385 OBD | 062-4598-01 XB073544 B063884 | 1 SOFTWARE: DISC, 8002A EDITOR EDIT VERS | 80009 062-4598-01 |
| | | * ['] | 062-4598-03 в063885 | 1 SOFTWARE: DISC, 8002A EDITOR EDIT VERS | 80009 062-4598-03 |
| -7 | 136-0578-00 | 22 . SKT,PL-IN ELEK:MICROCKT,24 PIN,LOW PROFILE 73803 C S9002-24 | -1 161-0066-00 | 1 CABLE ASSY, PWR,:3,18 AWG, 115V, 98.0 L | 80009 161-0066-00 |
| -8 | 118-0317-00 | 11 . TERMINAL, PIN: 80009 118-0317-00 | | | |
| -9 | 136-0670-00 | 4 . SKT, PL-IN ELEK: MICROCKT, 18 PIN, LOW PROFILE 73803 CS9002-18 | | | |
| -10 | 131-1343-00 | 8 . TERM. SET, PIN: 36-0.525 L X 0.025 SQ 22526 65501-136 | | | |
| -11 | 131-0993-00 | 2 . BUS, CONDUCTOR: 2 WIRE BLACK 00779 530153-2 | | | |

8001/8002A SERVICE REV JUN 1981

Appendix A

BUS ASSIGNMENTS

8001/8002A μ Processor Lab Motherboard Bus

| Pin # | Mnemonic | Description |
|-------|---------------|---|
| 1—4 | +5 Vdc | Primary TTL power supply. |
| 5—8 | AUX BUS | Undesignated power bus lines. |
| 9—10 | GND | Common ground with bus pins 15—16 and 97—100. |
| 11—12 | +12 Vdc | +12 volt power supply. |
| 13—14 | -12 Vdc | -12 volt power supply. |
| 15—16 | GND | Common ground with pins 9—10 and 97—100. |
| 17 | AØ | Least significant bus address line. |
| 18 | A1 | Bus address line. |
| 19 | A2 | Bus address line. |
| 20 | A3 | Bus address line. |
| 21 | A4 | Bus address line. |
| 22 | A5 | Bus address line. |
| 23 | A6 | Bus address line. |
| 24 | A7 | Bus address line. |
| 25 | A8 | Bus address line. |
| 26 | A9 | Bus address line. |
| 27 | A10 | Bus address line. |
| 28 | A11 | Bus address line. |
| 29 | A12 | Bus address line. |
| 30 | A13 | Bus address line. |
| 31 | A14 | Bus address line. |
| 32 | A15 | Most significant bus address line. |
| 33 | CMEM | Bank switch command. When high, allows System |
| | | Processor to address Program Memory. |
| 34 | RAM INH | Allows any module to override a RAM address and control |
| | | data bus. |

8001/8002A μProcessor Lab Motherboard Bus (cont)

| Pin # | Mnemonic | Description Description |
|-------|----------------|---|
| 35 | WD ACCESS | Enables data on 16 bits of the data bus when used in conjunction with a 16-bit emulator. |
| 36 | DØ | Least significant data bus line. |
| 37 | D 1 | Data bus line. |
| 38 | D2 | Data bus line. |
| 39 | D3 | Data bus line. |
| 40 | <u>D4</u> | Data bus line. |
| 41 | D5 | Data bus line. |
| 42 | D6 | Data bus line. |
| 43 | <u>D7</u> | Data bus line. |
| 44 | D8 | Data bus line. |
| 45 | D9 | Data bus line. |
| 46 | D10 | Data bus line. |
| 47 | D11 | Data bus line. |
| 48 | D12 | Data bus line. |
| 49 | D13 | Data bus line. |
| 50 | D14 | Data bus line. |
| 51 | D15 | Most significant data bus line. |
| 52 | M∕IO | Indicates whether the active emulator is addressing memory (low) or I/O (high). |
| 53 | WRP | Indicates that data on the data bus is valid for a write command. |
| 54 | OPREQ | Indicates when a bus operation is in progress. |
| 55 | R/W | Read/Write control line. Signifies a Read or Write operation to memory and I/O. |
| 56 | HOLD | HOLD request to active emulator. Used by memory and I $\!\!\!/ \!\!\!/ 0.$ |
| 57 | JMP CMD | Issued by the Debug and Front Panel I/O module to initiate a forced emulator processor jump. |
| 58 | RUN | Indicates that the active emulator processor module is in the RUN state. |
| 59 | RESET | Initializes all μ Processor Lab logic. RESET indicates both power-on reset and Front Panel reset. |

A-2 REV A OCT 1979

8001/8002A μ Processor Lab Motherboard Bus (cont)

| Pin # | Mnemonic | Description |
|-------|----------|--|
| 60 | JMP ACK | A response from the emulator processor to the Debug and Front Panel I/O module to enable a jump address onto the system address bus. |
| 61 | INTACK | Issued by the System Processor in response to an interrupt request. |

At this point, the μ Processor Lab bus is divided into two halves: system and program. The mnemonic for the system side is given for each pin with the mnemonic for the program side directly below in parentheses. The description of the program side will also be given in parentheses.

| 62 | INT Ø | Interrupt Level Ø |
|----|--------------|---|
| | (Forced Int) | (Forced Interrupt from the Debug and Front Panel I/O module to the emulator processor.) |
| 63 | MST INT 1 | Interrupt Level 1 |
| | (Not Used) | (Not used on the program side.) |
| 64 | INT 2 | Interrupt Level 2 |
| | (Not Used) | (Not used on the program side.) |
| 65 | INT 3 | Interrupt Level 3 |
| | (Not Used) | (Not used on the program side.) |
| 66 | INT 4 | Interrupt Level 4 |
| | (Not Used) | (Not used on the program side.) |
| 67 | INT 5 | Interrupt Level 5 |
| | (Not Used) | (Not used on the program side.) |
| 68 | INT 6 | Interrupt Level 6 |
| | (Not Used) | (Not used on the program side.) |

8001/8002A μProcessor Lab Motherboard Bus (cont)

| Pin # | Mnemonic | Description |
|-------|-------------|---|
| 69 | INT 7 | Interrupt Level 7 |
| | (Not Used) | (Not used on the program side.) |
| 70 | INT 8 | Interrupt Level 8 |
| | (Not Used) | (Not used on the program side.) |
| 71 | INT 29 | Interrupt Level 29 |
| | (Debug Int) | (Debug interrupt produced by the RTPA.) |
| 72 | INT 30 | Interrupt Level 30 |
| | (Debug Int) | (Debug interrupt produced by the RTPA. |
| 73 | INT 31 | Interrupt Level 31 |
| | (Debug Int) | (Not Used) |
| 74 | INT 12 | Interrupt Level 12 |
| | (UPAUSE) | (Generated by the emulator processor module.) |
| 75 | INT 13 | Interrupt Level 13 |
| | (SLV OPREQ) | (Used by the Debug and Front Panel I/O module and the RTPA.) |
| 76 | INT 14 | Interrupt Level 14 |
| | (SLV RST) | (Used by the Debug and Front Panel I/O module to reset the emulator processor.) |
| 77 | INT 15 | Interrupt Level 15 |
| | (SLV PAUSE) | (Issued by the Debug and Front Panel I/O module to the emulator processor.) |

8001/8002A μ Processor Lab Motherboard Bus (cont)

| | 8001/8002A APPROCESSOR Lab Wiotherboard Bus (Cont) | | | |
|-------|--|--|--|--|
| Pin # | Mnemonic | Description | | |
| 78 | MST PSE | Indicates the System Processor is paused with its data, control, and address lines tri-stated. | | |
| | (RFSH NW) | (Issued by the emulator processor module to refresh Program Memory.) | | |
| 79 | DBG INT | Line from the Debug and Front Panel I/O module to the System Processor module to request an interrupt. | | |
| | (SLV INOP) | (Issued by the RTPA to reset active lines on the emulator processor.) | | |
| 80 | DBG VEN | Debug Vector Enable from the System Processor acknow- ledging the Debug interrupt and enabling the Debug interrupt vector. | | |
| | (SWAP) | (Used only by the 9900 Emulator Processor to swap addresses in Program Memory.) | | |
| 81 | MST INTD | Master Interrupted line from the System Processor to Debug and Front Panle I/O module. This line causes the emulator processor to be paused and the System Processor to run. | | |
| | (Spare) | (Spare line on the program side.) | | |
| 82 | FETCH | FETCH line from the active emulator processor, signifying an instruction fetch. | | |
| 83 | PAUSE | Causes all processors to go to an inactive state with control, address, and data lines tri-stated. | | |
| 84 | MAST RUN | Indicates that the System Processor is running. | | |
| 85 | SENSE | Not used in the 8001/8002A μ Processor Labs. | | |
| 86 | FLAG | Not used in the 8001/8002A μ Processor Labs. | | |
| 87 | F.P. HOLD | Front Panel Hold request to System Processor, indicating a breakpoint or single-step operation. | | |
| 88 | MST INTACK | Master Interrupt Acknowledge. | | |

REV A OCT 1979 A-5

| Pin # | Mnemonic | Description |
|-------|-----------|--|
| 89 | MST INT 3 | Master Interrupt 3. |
| 90 | Spare | Spare on the system side. |
| | (UMAP) | (Issued by the System Communications module, indicating prototype memory mapping.) |
| 91 | Spare | |
| 92 | Spare | |
| 93 | SLV CLK | Clock output from the active emulator processor. |
| 94 | I/O CLK | 38.4 kHz clock from the System Processor. |
| 95 | 2650 CLK | 10 MHz clock from the System Processor. |
| 96 | SYS CLK | 10 MHz clock from the System Processor. |
| 97 | GND | Ground. |
| 98 | GND | Ground. |
| 99 | GND | Ground. |
| 100 | GND | Ground. |

A-6 REV A OCT 1979

Appendix B

DECIMAL-HEXADECIMAL-BINARY EQUIVALENTS 0—255₁₀

| Deci- | Hexa- deci- | Binary 8-bit | Deci- | Hexa- deci- | Binary 8-bit | Deci- | Hexa- deci- | Binary 8-bit | Deci- | Hexa- deci- | Binary 8-bit |
|----------|----------------|------------------------|------------|----------------|------------------------|------------|----------------|------------------------|------------|----------------|------------------------|
| mai | mai | Code | mai | mai | Code | mai | mal | Code | mal | mal | Code |
| 0 | 00 | 0000 0000 | 64 | 40 | 0100 0000 | 128 | 80 | 1000 0000 | 192 | C0 | 1100 0000 |
| 1 | 01 | 0000 0001 | 65 | 41 | 0100 0001 | 129 | 81 | 1000 0001 | 193 | C1 | 1100 0001 |
| 2 | 02 | 0000 0010 | 66 | 42 | 0100 0010 | 130 | 82 | 1000 0010 | 194 | C2 | 1100 0010 |
| 3 4 | 03 04 | 0000 0011 0000 0100 | 67 68 | 43 44 | 0100 0011 0100 0100 | 131 132 | 83 84 | 1000 0011 1000 0100 | 195 196 | C3 C4 | 1100 0011 1100 0100 |
| 5 | 05 | 0000 0100 | 69 | 45 | 0100 0100 | 133 | 85 | 1000 0100 | 197 | C5 | 1100 0100 |
| 6 | 06 | 0000 0110 | 70 | 46 | 0100 0110 | 134 | 86 | 1000 0110 | 198 | C6 | 1100 0110 |
| 7 | 07 | 0000 0111 | 71 | 47 | 0100 0111 | 135 | 87 | 1000 0111 | 199 | C7 | 1100 0111 |
| 8 | 08 | 0000 1000 | 72 | 48 | 0100 1000 | 136 | 88 | 1000 1000 | 200 | C8 | 1100 1000 |
| 9 | 09 | 0000 1001 | 73 | 49 4A | 0100 1001 | 137 138 | 89 8A | 1000 1001 1000 1010 | 201 202 | C9 CA | 1100 1001 1100 1010 |
| 10 11 | OA OB | 0000 1010 0000 1011 | 74 75 | 4B | 0100 1010 0100 1011 | 139 | 8B | 1000 1010 | 203 | CB | 1100 1010 |
| 12 | oc | 0000 1100 | 76 | 4C | 0100 1100 | 140 | 8C | 1000 1100 | 204 | cc | 1100 1100 |
| 13 | 0D | 0000 1101 | 77 | 4D | 0100 1101 | 141 | 8D | 1000 1101 | 205 | CD | 1100 1101 |
| 14 | 0E | 0000 1110 | 78 | 4E | 0100 1110 | 142 | 8E | 1000 1110 | 206 | CE | 1100 1110 |
| 15 | 0F | 0000 1111 | 79 | 4F | 0100 1111 | 143 | 8F | 1000 1111 | 207 | CF | 1100 1111 |
| 16 17 | 10 11 | 0001 0000 0001 0001 | 80 81 | 50 51 | 0101 0000 | 144 145 | 90 91 | 1001 0000 | 208 209 | D0 D1 | 1101 0000 1101 0001 |
| 18 | 12 | 0001 0001 | 82 | 52 | 0101 0001 | 146 | 92 | 1001 0001 | 210 | D2 | 1101 0010 |
| 19 | 13 | 0001 0011 | 83 | 53 | 0101 0011 | 147 | 93 | 1001 0011 | 211 | D3 | 1101 0011 |
| 20 | 14 | 0001 0100 | 84 | 54 | 0101 0100 | 148 | 94 | 1001 0100 | 212 | D4 | 1101 0100 |
| 21 | 15 | 0001 0101 | 85 | 55 | 0101 0101 | 149 | 95 | 1001 0101 | 213 | D5 | 1101 0101 |
| 22 | 16 | 0001 0110 | 86 | 56 | 0101 0110 | 150 | 96 | 1001 0110 | 214 | D6 | 1101 0110 |
| 23 24 | 17 18 | 0001 0111 | 87 88 | 57 58 | 0101 0111 | 151 152 | 97 98 | 1001 0111 1001 1000 | 215 216 | D7 D8 | 1101 0111 1101 1000 |
| 25 | 19 | 0001 1000 | 89 | 59 | 0101 1001 | 153 | 99 | 1001 1001 | 217 | D9 | 1101 1001 |
| 26 | 1A | 0001 1010 | 90 | 5A | 0101 1010 | 154 | 9A | 1001 1010 | 218 | DA | 1101 1010 |
| 27 | 1B | 0001 1011 | 91 | 5B | 0101 1011 | 155 | 9B | 1001 1011 | 219 | DB | 1101 1011 |
| 28 | 1C | 0001 1100 | 92 | 5C | 0101 1100 | 156 | 9C | 1001 1100 | 220 | DC | 1101 1100 |
| 29 | 1 <u>D</u> | 0001 1101 | 93 | 5D | 0101 1101 | 157 | 9 <u>D</u> | 1001 1101 | 221 222 | DD DE | 1101 1101 1101 1110 |
| 30 31 | 1E 1F | 0001 1110 0001 1111 | 94 95 | 5E 5F | 0101 1110 | 158 159 | 9E 9F | 1001 1110 | 223 | DF | 1101 1111 |
| 32 | 20 | 0010 0000 | 96 | 60 | 0110 0000 | 160 | AO | 1010 0000 | 224 | E0 | 1110 0000 |
| 33 | 21 | 0010 0001 | 97 | 61 | 0110 0001 | 161 | A1 | 1010 0001 | 225 | E1 | 1110 0001 |
| 34 | 22 | 0010 0010 | 98 | 62 | 0110 0010 | 162 | A2 | 1010 0010 | 226 | E2 | 1110 0010 |
| 35 | 23 | 0010 0011 | 99 | 63 | 0110 0011 | 163 | A3 | 1010 0011 | 227 | E3 | 1110 0011 |
| 36 | 24 25 | 0010 0100 | 100 101 | 64 65 | 0110 0100 | 164 165 | A4 A5 | 1010 0100 1010 0101 | 228 229 | E4 E5 | 1110 0100 1110 0101 |
| 37 38 | 26 | 0010 0101 | 102 | 66 | 0110 0101 | 166 | A6 | 1010 0110 | 230 | E6 | 1110 0110 |
| 39 | 27 | 0010 0111 | 103 | 67 | 0110 0111 | 167 | A7 | 1010 0111 | 231 | E7 | 1110 0111 |
| 40 | 28 | 0010 1000 | 104 | 68 | 0110 1000 | 168 | A8 | 1010 1000 | 232 | E8 | 1110 1000 |
| 41 | 29 | 0010 1001 | 105 | 69 | 0110 1001 | 169 | A9 | 1010 1001 | 233 | E9 | 1110 1001 |
| 42 | 2A | 0010 1010 | 106 | 6A | 0110 1010 | 170 | AA | 1010 1010 | 234 235 | EA EB | 1110 1010 |
| 43 44 | 2B 2C | 0010 1011 | 107 108 | 6B 6C | 0110 1011 | 171 172 | AB AC | 1010 1011 1010 1100 | 235 | EC | 1110 1011 1110 1100 |
| 45 | 2D | 0010 1101 | 109 | 6D | 0110 1101 | 173 | AD | 1010 1101 | 237 | ĒĎ | 1110 1101 |
| 46 | 2E | 0010 1110 | 110 | 6E | 0110 1110 | 174 | ΑE | 1010 1110 | 238 | EE | 1110 1110 |
| 47 | 2F | 0010 1111 | 111 | 6F | 0110 1111 | 175 | AF | 1010 1111 | 239 | EF | 1110 1111 |
| 48 | 30 | 0011 0000 | 112 | 70 | 0111 0000 | 176 | B0 | 1011 0000 | 240 | F0 F1 | 1111 0000 |
| 49 50 | 31 | 0011 0001 | 113 | 71 72 | 0111 0001 | 177 178 | B1 B2 | 1011 0001 1011 0010 | 241 242 | F2 | 1111 0001 1111 0010 |
| 51 | 33 | 0011 0010 | 115 | 73 | 0111 0010 | 179 | B3 | 1011 0010 | 243 | F3 | 1111 0011 |
| 52 | 34 | 0011 0100 | 116 | 74 | 0111 0100 | 180 | B4 | 1011 0100 | 244 | F4 | 1111 0100 |
| 53 | 35 | 0011 0101 | 117 | 75 | 0111 0101 | 181 | B5 | 1011 0101 | 245 | F5 | 1111 0101 |
| 54 | 36 | 0011 0110 | 118 | 76 | 0111 0110 | 182 | B6 | 1011 0110 | 246 | F6 | 1111 0110 |
| 55 56 | 37 | 0011 0111 | 119 | 77 78 | 0111 0111 | 183 184 | B7 B8 | 1011 0111 | 247 248 | F7 F8 | 1111 0111 |
| 56 | 38 | 0011 1000 | 120 121 | 78 | 0111 1000 | 185 | B9 | 1011 1000 | 249 | F9 | 1111 1000 |
| 58 | 3A | 0011 1010 | 122 | 7A | 0111 1010 | 186 | BA | 1011 1010 | 250 | FA | 1111 1010 |
| 59 | 3B | 0011 1011 | 123 | 7B | 0111 1011 | 187 | BB | 1011 1011 | 251 | FB | 1111 1011 |
| 60 | 3C | 0011 1100 | 124 | 7C | 0111 1100 | 188 | BC | 1011 1100 | 252 | FC | 1111 1100 |
| 61 | 3D | 0011 1101 | 125 | 7D | 0111 1101 | 189 | BD | 1011 1101 | 253 | FD | 1111 1101 |
| 62 | 3E | 0011 1110 | 126 | 7E 7F | 0111 1110 | 190 | BE BF | 1011 1110 1011 1111 | 254 255 | FE FF | 1111 1110 |
| 63 | 3F | 0011 1111 | 127 | _ ′ ′ | 0111 1111 | 191 | _ or_ | 1011 1111 | 200 | | 11111111 |

Appendix C INTERRUPT VECTORS

| 0 0000 Reset 1 0002 System Memory Parity Error 2 0004 NA 3 0006 Program Memory Parity Error 4 0008 Console In 5 000A Console Out 6 000C System Communications 1 7 000E System Communications 2 8 0010 System Communications 3 9 0012 Timer 10 0014 NA | |
|---|-----|
| 2 0004 NA 3 0006 Program Memory Parity Error 4 0008 Console In 5 000A Console Out 6 000C System Communications 1 7 000E System Communications 2 8 0010 System Communications 3 9 0012 Timer | |
| 3 0006 Program Memory Parity Error 4 0008 Console In 5 000A Console Out 6 000C System Communications 1 7 000E System Communications 2 8 0010 System Communications 3 9 0012 Timer | |
| 4 0008 Console In 5 000A Console Out 6 000C System Communications 1 7 000E System Communications 2 8 0010 System Communications 3 9 0012 Timer | |
| 5 000A Console Out 6 000C System Communications 1 7 000E System Communications 2 8 0010 System Communications 3 9 0012 Timer | |
| 6 000C System Communications 1 7 000E System Communications 2 8 0010 System Communications 3 9 0012 Timer | |
| 7 000E System Communications 2 8 0010 System Communications 3 9 0012 Timer | |
| 8 0010 System Communications 3 9 0012 Timer | |
| 9 0012 Timer | |
| | |
| 10 0014 NA | |
| | |
| 11 0016 Flexible Disc | |
| 12 0018 NA | |
| 13 001A PROM Programmer 1 | |
| 14 001C PROM Programmer 2 | |
| 15 001E NA | |
| 16 0020 Emulator SVC 1 | |
| 17 0022 Emulator SVC 2 | |
| 18 0024 Emulator SVC 3 | |
| 19 0026 Emulator SVC 4 | |
| 20 0028 Emulator SVC 5 | |
| 21 002A Emulator SVC 6 | |
| 22 002C Emulator SVC 7 | |
| 23 002E Emulator SVC 8 | |
| 24 0030 Breakpoint 1 | |
| 25 0032 Breakpoint 2 | |
| 26 0034 Single Cycle | |
| 27 0036 Emulator Halted | |
| 28 0038 Diagnostic Interrupt | |
| 29 003A Real-Time Prototype Analyzer (RTF | P(Α |
| 30 003C Debug Interrupt 30 | |
| 31 003E Debug Interrupt 31 | |

NA = Not Assigned

Appendix D

MODULE TEST POINTS

System Processor

TP1 HOLD U3090-4

TP2 PAUSE U4170-8

TP3 INTACK U3040-10

TP4 RUN U3040-8

TP5 U5140-1, 9, 10, 15

TP6 +5.2 V U5140-11

16K Dynamic RAM

TP1 WE U1130-2

TP2 PARITY INT U2110-9

TP3 RD STR U2140-10

TP5 U1160-3

TP6 HOLD U2150-7

TP7 PROM ACCESS U3170-6

TP9 REF OP U2170-5

TP10 MOD ADDR U5150-3, 8, 11; U5170-4, 6, 8

TP11 GND

Systems Communications Module

No test points.

REV A OCT 1979

Debug and Front Panel I/O

| TP1 | SPRTI | ĒN | U1160-3 |
|-----|-------|----------------|---------|
| TP2 | | | U5100-6 |
| TP3 | OPRE | <u>α</u> | U5080-5 |
| TP4 | BP1 | (Breakpoint 1) | U4100-3 |
| TP5 | BP2 | (Breakpoint 2) | U4100-6 |
| TP6 | GND | | |

8001 System Memory

| TP1 | PATCH ROM | U2010-8 |
|------|-----------|----------|
| TP2 | BK SW ROM | U1020-12 |
| TP3 | 2K RAM | U2120-13 |
| TP4 | HOLD | U2030-3 |
| TP5 | 6K ROM | U2030-11 |
| TP6 | | U4020-20 |
| TP 7 | INT 1 | U1040-7 |
| TP8 | R/W | U5110-8 |
| TP9 | WRP | U1060-11 |
| TP10 | BD SEL | U5090-4 |

High-Speed Memory

| TP1 | GND ₄ | |
|------|------------------|----------|
| TP2 | RAS1 | U3170-9 |
| TP3 | RAS2 | U3160-5 |
| TP4 | CAS1 | U3120-6 |
| TP5 | LATCH | U4170-6 |
| TP6 | SELECT | U4150-6 |
| TP7 | REF OP | U3160-9 |
| TP8 | REF CLK | U5150-4 |
| TP9 | OPREQ | U7170-12 |
| TP10 | WRT EN | U7180-6 |
| TP11 | HOLD | U3180-10 |

D-3

Assembler Processor

| TP1 | GND * | |
|------|-----------|----------|
| TP2 | Z80 RUN | U4100-8 |
| TP3 | UPE7 | U3030-9 |
| TP4 | Z80 RESET | U4080-10 |
| TP5 | | U4090-6 |
| TP6 | FETCH | U5080-6 |
| TP7 | RUN | U5060-9 |
| TP8 | Z80 OPREQ | U3080-8 |
| TP9 | ACTIVE | U5090-9 |
| TP10 | WAIT | U3100-6 |
| TP11 | FP HOLD | U5100-4 |
| TP12 | BUS RQ | U3100-10 |
| TP13 | SLV PAUSE | U5100-8 |

D-4 REV A OCT 1979

Appendix E

I/O DEVICE ADDRESS ASSIGNMENTS

SYSTEM PROCESSOR I/O ADDRESS ASSIGNMENTS

| Device | Device Read/Write | | | | |
|---------|-------------------|---|--|--|--|
| Address | Function | Device | | | |
| AØ | R/W | F8/3870 Emulator Processor | | | |
| A1 | R/W | 1802 Emulator Processor | | | |
| A2 | R/W | 8048 Emulator Processor | | | |
| А3 | R/W | 6500/1 Emulator Processor | | | |
| BØ | R/W | 2704/2708 PROM Programmer low order address port | | | |
| B1 | R/W | 2704/2708 PROM Programmer control and status port | | | |
| B2 | R/W | 2704/2708 PROM Programmer data port | | | |
| CØ | w | Real Time Prototype Analyzer counter increment | | | |
| C1 | w | Real Time Prototype Analyzer trace transaction control | | | |
| C1 | R | Real Time Prototype Analyzer trace data | | | |
| C2 | w | Real Time Prototype Analyzer breakpoint mode control | | | |
| C2 | R | Real Time Prototype Analyzer status | | | |
| С3 | w | Real Time Prototype Analyzer breakpoint and counter modes | | | |
| С3 | R | Real Time Prototype Analyzer delay, pass, count | | | |
| C4 | W | Real Time Prototype Analyzer event data and masks | | | |
| C4 | R | Real Time Prototype Analyzer pass counter, last, low order | | | |
| C5 | W | Real Time Prototype Analyzer delay, pass, count load | | | |
| C5 | R | Real Time Prototype Analyzer pass counter, last, high order | | | |
| C6 | W | Real Time Prototype Analyzer CØ, C4, C5 subaddress | | | |
| C6 | R | Real Time Prototype Analyzer pass counter, next, low order | | | |

SYSTEM PROCESSOR I/O ADDRESS ASSIGNMENTS (cont)

| Device | Read/Write | · |
|---------|------------|---|
| Address | Function | Device |
| С7 | W | Real Time Prototype Analyzer event requirements |
| C7 | R | Real Time Prototype Analyzer pass counter, next, high order |
| С9 | R/W | System Communications Board port #3 receive data (memory map) |
| CA | R/W | System Communications Board port #1 data |
| СВ | R/W | System Communications Board port #1 control |
| СС | R/W | System Communications Board port #2 data |
| CD | R/W | System Communications Board port #2 control |
| CE | R/W | System Communications Board port #3 transmit data |
| CF | R/W | System Communications Board port #3 control |
| DD | R/W | 1702A PROM Programmer low order address port |
| DE | R/W | 1702A PROM Programmer control and status port |
| DF | R/W | 1702A PROM Programmer data port |
| E1 | R/W | 8080 Emulator Processor |
| E2 | R/W | 6800/6802 Emulator Processor |
| E3 | R/W | Z80 Emulator Processor |
| E4 | R/W | 9900 Emulator Processor |
| E5 | R/W | 8085 Emulator Processor |
| E7 | W | Assembler Processor |
| E8 | R/W | Console data port |
| E9 | R/W | Console control port |
| EA | R/W | Flexible Disc control port |
| EB | R/W | Flexible Disc data port |

SYSTEM PROCESSOR I/O ADDRESS ASSIGNMENTS (cont)

| Device Read/Write | | | | |
|-------------------|----------|--|--|--|
| Address | Function | Device | | |
| EC | W | Internal Timing Logic control port | | |
| ED | w | System Memory protect port | | |
| EE | W | Program Memory control port | | |
| F8 | w | Front Panel control port | | |
| F9 | W | Front Panel command port | | |
| FA | R/W | Jump Address low order byte | | |
| FB | R/W | Jump Address high order byte | | |
| FC | w | Breakpoint Register 1 low order byte | | |
| FC | R | Program Count Register 1 low order byte | | |
| FD | W | Breakpoint Register 1 high order byte | | |
| FD | R | Program Count Register 1 high order byte | | |
| FE | w | Breakpoint Register 2 low order byte | | |
| FE | R | Program Count Register 2 low order byte | | |
| FF | W | Breakpoint Register 2 high order byte | | |
| FF | R | Program Count Register 2 high order byte | | |

@ OCT 1979 E-3