
J1509A – HP Front Door for 41U quartz rack

J1509D – HP Front Door for 41U graphite rack

Technical Data


Control access while allowing airflow to rack mounted equipment

Attractive, sturdy front door provides security and pleasing aesthetics.

The J1509A/D perforated front door is used only with the HP Rack System/E41 (A4902A/A4902D).

Features

- Solid construction
- 63% perforation in door optimizes ventilation
- Equipment is visible through the perforations
- Lockable latch secures equipment in rack
- Can be mounted to open from the right or left
- Quick disconnect hinges



63% perforation provides optimum ventilation

Installation

Attach hinges to the pre-threaded inserts in the front column. Attach the latch catch on the opposite column. Fit the door hinge pins into the column mounted hinges. Attach the ground cable to the rack base and door.

Tools required for installation:

- Torx T25 screwdriver


What you get in the box

- Perforated, lockable front door
- 2 Hinges
- 2 Adhesive mount bumper feet
- Mounting hardware
- Latch lock fastener
- Latch catch
- 2 Keys
- Installation instructions

Specifications

- **Weight:** 9.3 kg (20.5 lbs)
- **Materials:** 16-gauge, cold-rolled steel
- **Color:** J1509A - Quartz gray
J1509D - Graphite

Product Number J1509A

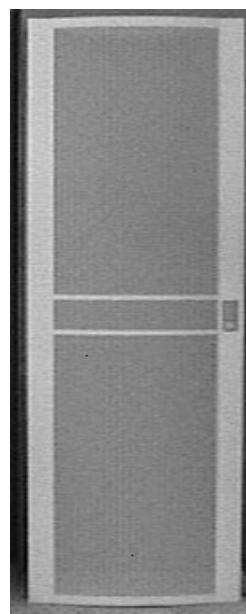

Related Products

The perforated front door is available in other sizes also:

- **J1510A** - for use with the HP Rack System/E,33U (A4901A & A5135A)
- **J1510D** - for use with the HP Rack System/E,33U (A4901D)
- **J1511A** - for use with the HP Rack System/E,25U (J1502B, A4900A & A5134A)

Warranty

Three year replacement