

---

**J1510A – HP Front Door for 33U quartz rack** ■

**J1510D – HP Front Door for 33U graphite rack** ■

## Technical Data


### Control access while allowing airflow to rack mounted equipment

Attractive, sturdy front door provides security and pleasing aesthetics.

The J1510A/D perforated front door is used only with the HP Rack System/E33 ( A4901A/D & A5135A).

### Features

- Solid construction
- 63% perforation in door optimizes ventilation
- Equipment is visible through the perforations
- Lockable latch secures equipment in rack
- Can be mounted to open from the left or right
- Quick disconnect hinges



**63% perforation provides optimum ventilation**

### Installation

Attach hinges to the pre-threaded inserts in the front column. Attach the latch catch on the opposite column. Fit the door hinge pins into the column mounted hinges. Attach the ground cable to the rack base and door.

Tools required for installation:

- Torx T25 screwdriver

### What you get in the box

- Perforated, lockable front door
- 2 Hinges
- 2 Adhesive mount bumper feet
- Mounting hardware
- Latch lock fastener
- Latch catch
- 2 Keys
- Installation instructions


### Specifications

- **Weight:** 7.6 kg (16 lbs)
- **Materials:** 16-gauge, cold-rolled steel
- **Color:** Quartz gray (6009-0242)

### Product Number

**J1510A/D**

---

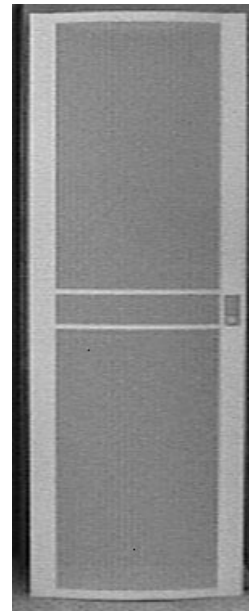

### Related Products

The perforated front door is available in other sizes also:

- **J1509A** - for use with the HP Rack System/E41 (A4902A & A5136A)- quartz color
- **J1509D**- for use with the HPRack System/E41 (A4902D)- graphite color
- **J1511A** - for use with the HP Rack System/E25 (A4900A & A5134A)- quartz color

### Warranty

- Three year replacement